

IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.


THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

MODEL: 3654/3664 SURFACE REMOTE LOW VOLTAGE - INPUT CURRENT: 700mA


A- MAKE CEILING CUT-OUT FOR CONNECTION BOX OR WHIP CABLE (SEE CUT OUT TABLE).

B- PLACE PLASTIC ANCHOR SCREWS IN THE CEILING AT THE REQUIRED DISTANCE (REFER TO TABLE AND LAYOUTS ON PAGE 1).

C- IN CASE OF NECESSARY, UNSNAP THE COVER PLATES TO HAVE ACCESS AT THE MOUNTING SCREWS.

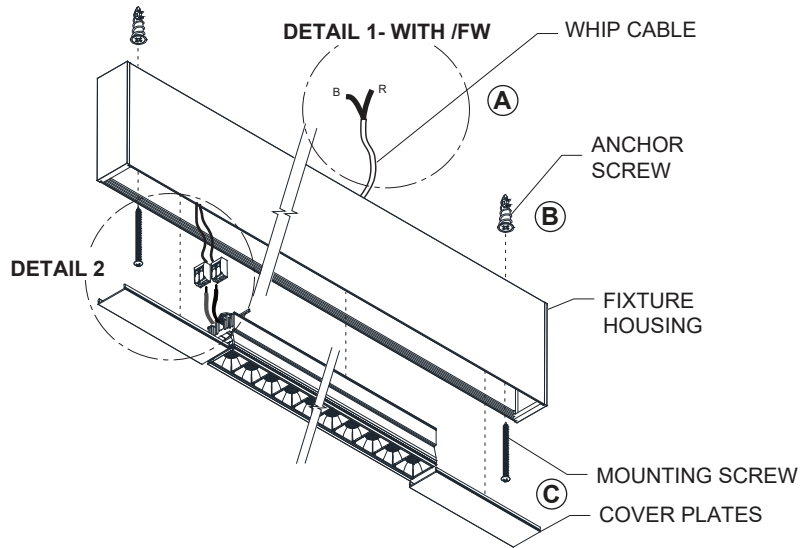


TYPICAL ISOMETRIC VIEW

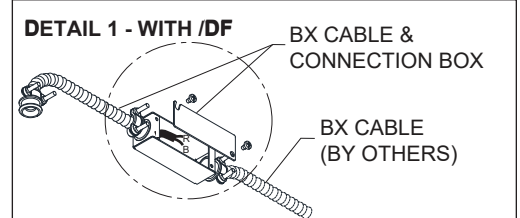


CONFIGURATION:

FULL




SYMMETRIC




ANCHOR DISTANCE LAYOUT

CONFIGURATION	3654 - HIGH PROFILE		3664 - LOW PROFILE	
	ACTUAL LENGTH	ANCHOR DISTANCE	ACTUAL LENGTH	ANCHOR DISTANCE
FULL-LB05	5¾" (147mm)	3¼" (84mm)	5¾" (147mm)	3⅝" (98mm)
FULL-LB10	11" (280mm)	8" (203mm)	11" (280mm)	8" (203mm)
FULL-LB15	16¼" (412mm)	13¼" (337mm)	16¼" (412mm)	13¼" (337mm)
SYMMETRIC-LB5	21¼" (552mm)	19" (483mm)	20¾" (527mm)	18½" (470mm)
SYMMETRIC-LB10	21¼" (552mm)	19" (483mm)	26" (660mm)	23½" (597mm)
SYMMETRIC-LB15	21¼" (552mm)	19" (483mm)	31⅞" (791mm)	29" (737mm)

COMPACT PROFILE (3664)

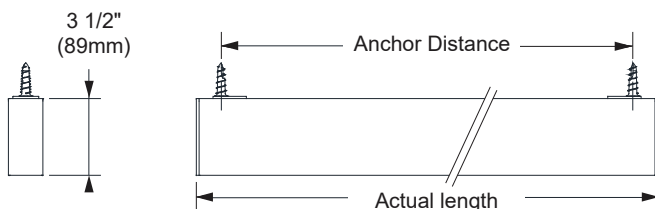

HIGH PROFILE (3654)

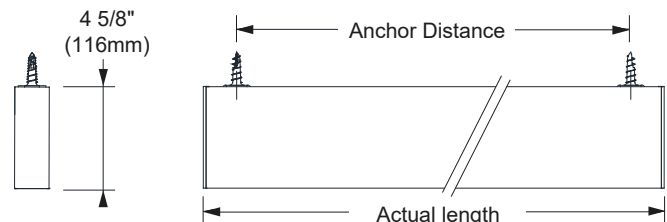


DETAIL 1 - MOUNTING INSTALLATION AND ELECTRICAL

D1- ON /FW : MAKE ALL CONNECTIONS BETWEEN WHIP CABLE AND REMOTE DRIVER USING WIRE CONNECTORS (**NOT INCLUDED**).

D2- ON /DF : OPEN CONNECTION BOX LOCATED ON THE TOP OF THE FIXTURE: UNSCREW CONNECTION BOX SCREW TO SLIDE OUT CAP. INSERT THE BX CABLE (**BY OTHERS**) INSIDE THE BX CONNECTOR, MAKE ALL NECESSARY WIRE CONNECTIONS IN THE CONNECTION BOX. LOCK BX IN PLACE BY MEANS OF THE BX CONNECTOR (**PROVIDED**). SLIDE BACK IN THE CAP AND SCREW TIGHT TO CLOSE CONNECTION BOX.


D1

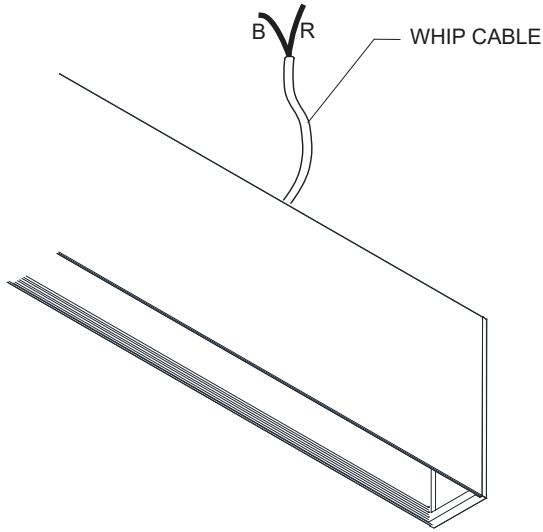

CUT OUT :

CUT OUT FOR WHIP CABLE (MAX) : Ø½" (13mm)

D2

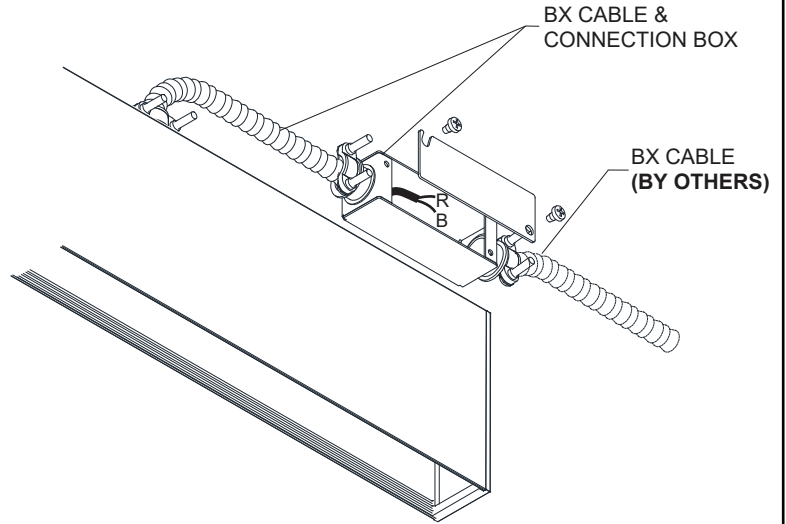

CUT OUT :


CUT OUT FOR 1 CONNECTION BOX : 1¼" x 3" (32 X 76mm)

ELECTRICAL CONNECTIONS


WIRES LEGEND	
COLOR	DESTINATION
Red (R)	+
Black (B)	-

Use for
Remote
2-Wire

WIRING DIAGRAM



DETAIL 2 - FIXTURE HOUSING INSTALLATION

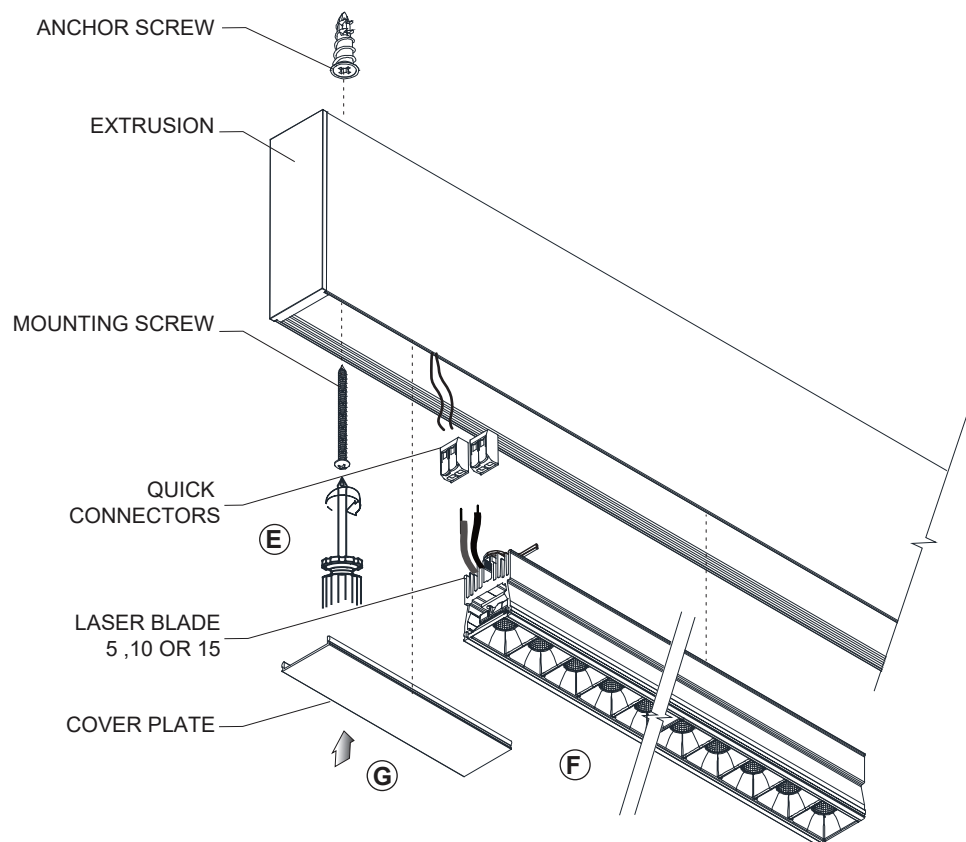

TYPICAL ISOMETRIC VIEW

E- SCREW THE EXTRUSION IN THE CEILING ANCHORS USING A PHILIPS HEAD SCREWDRIVER.

LAMPING (IN CASE OF NECESSARY)

F- MAKE NECESSARY CONNECTIONS INSIDE THE FIXTURE USING INCLUDED QUICK CONNECTORS. ALIGN LASER BLADE WITH ALUMINIUM EXTRUSION AND SLIDE ONE SIDE BY APPLYING A LIGHT PRESSION TO MAKE THE OTHER SIDE CLICK IN PLACE.

COVER PLATE (IN CASE OF NECESSARY)

G- REPLACE COVER PLATES . REVERSE STEP C.