
Design Mario iGuzzini Cucinella

Last information update: October 2024

Product configuration: EP78

EP78: Spotlight with bracket - Neutral White LED - DALI - Wide Flood optic





Product code

EP78: Spotlight with bracket - Neutral White LED - DALI - Wide Flood optic

Technical description

Floodlight designed to use Neutral White LED lamps with a Wide Flood optic. Can be installed at ground level, on walls (using screw anchors) and on pole mounting systems. The luminaire consists of an optical assembly/component-holding box and hidden fixing bracket. The optical assembly and front frame are made of die-cast aluminium alloy painted with a smooth finish (grey RAL 9007) or a textured finish (white RAL 9016). The painting process includes a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The next painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The tempered sodium-calcium glass cover has customised serigraphy, is 5mm thick, and joined to the frame with silicone. The frame is fastened to the optical assembly by captive M5 AISI 304 stainless steel screws and a galvanised steel safety cable. The product comes complete with a Neutral White colour, monochrome LED circuit, an optic with a 99.93% super-pure aluminium Opti Beam Reflector reflector with a polished, anodized surface and built-in electronic ballast. The component-holding box, in the rear of the luminaire, is set up to hold the control gear, which is fixed with captive screws on a galvanised steel pull-out plate. The control gear can be accessed through the rear door made of painted aluminium alloy, fixed to the product body with four M5 AISI 304 stainless steel captive screws and a safety cable. iPro can be adjusted +95°/-5° relative to the horizontal line using a bracket made of extruded aluminium, on which a graduated scale (with 15° steps) is marked using serigraphy. The internal silicone seals guarantee watertightness IP66h Set up for pass-through wiring using a double M24x1.5 nickel-plated brass cable gland (suitable for cables with 7÷16mm diameter). All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

Installation

Ground, wall or ceiling installation using special bracket. Secure using screw anchors for concrete, cement and solid brick. It can also be installed on a MultiPro pole system using suitable accessories.

 Colour
 Weight (Kg)

 White (01) | Black (04) | Grey (15) | Rust Brown (F5)
 6.3

Mounting

wall arm|pole arm|ground surface|wall surface|ground anchored|ground spike|ceiling surface|u-bracket

Wiring

Control gear complete with dimmable DALI electronic ballast.

Notes

Overvoltage protection: 6KV Common Mode and 4KV Differential Mode.

Complies with EN60598-1 and pertinent regulations


IK07 IP66

IK07 IP66


IK07 IP66

Beam angle [°]: 46° / 47° Inrush current: 21 A / 300 μs CRI (minimum): 80 Maximum number of Colour temperature [K]: 4000 luminaires of this type per MacAdam Step: 2 miniature circuit breaker: B16A: 21 luminaires			
W system: 26.6 Voltage [Vin]: 230 Im source: 4080 Lamp code: LED W source: 23 Number of lamps for optical 1 Luminous efficiency (lm/W, 124.2 assembly: real value): ZVEI Code: LED Im in emergency mode: - Number of optical 1 Total light flux at or above 0 assemblies: an angle of 90° [Lm]: Intervallo temperatura from -30°C to 50°C. Light Output Ratio (L.O.R.) 81 [%]: Power factor: See installation instruction from source of luminaires of this type per miniature circuit breaker: B16A: 21 luminaires			
Im source: 4080 Lamp code: LED W source: 23 Number of lamps for optical 1 Luminous efficiency (lm/W, 124.2 assembly: ZVEI Code: LED Im in emergency mode: - Number of optical 1 Total light flux at or above an angle of 90° [Lm]: Intervallo temperatura ambiente: from -30°C to 50°C. Light Output Ratio (L.O.R.) 81 Power factor: See installation instruction instruction. Beam angle [°]: 46° / 47° Inrush current: 21 A / 300 μs CRI (minimum): 80 Maximum number of luminaires of this type per miniature circuit breaker: B10A: 13 luminaires MacAdam Step: 2 miniature circuit breaker: B16A: 21 luminaires	310 (Ta 40°C)		
W source: 23 Luminous efficiency (lm/W, 124.2 assembly: real value): ZVEI Code: LED Im in emergency mode: - Number of optical 1 Total light flux at or above an angle of 90° [Lm]: Intervallo temperatura ambiente: Power factor: See installation instruction and ple of the power factor: See installation instruction for the power factor: 21 A / 300 μs CRI (minimum): 80 Colour temperature [K]: 4000 MacAdam Step: 2 Number of lamps for optical 1 assembly: Interval lotence from -30°C to 50°C. See installation instruction for the power factor: See installation instruction for the power factor: 21 A / 300 μs Maximum number of luminaires of this type per miniature circuit breaker: B16A: 21 luminaires			
Luminous efficiency (Im/W, 124.2 assembly: zVEI Code: LED Im in emergency mode: - Number of optical assemblies: Total light flux at or above on an angle of 90° [Lm]: Intervallo temperatura ambiente: Light Output Ratio (L.O.R.) 81 [%]: Power factor: See installation instruction in the current: 21 A / 300 µs CRI (minimum): 80 Colour temperature [K]: 4000 MacAdam Step: 2 MacAdam Step: 2			
real value): Im in emergency mode: Total light flux at or above an angle of 90° [Lm]: Light Output Ratio (L.O.R.) Beam angle [°]: Beam angle [°]: CRI (minimum): 80 Maximum number of Colour temperature [K]: MacAdam Step: 2 VIEI Code: LED Number of optical 1 Intervallo temperatura from -30°C to 50°C. ambiente: Power factor: See installation instruction Maximum number of Iuminaires of this type per miniature circuit breaker: B10A: 13 luminaires B16A: 21 luminaires	1		
Im in emergency mode: Total light flux at or above an angle of 90° [Lm]: Light Output Ratio (L.O.R.) Beam angle [°]: CRI (minimum): 80 Maximum number of Colour temperature [K]: Mumber of optical assemblies: Intervallo temperatura ambiente: Power factor: See installation instruction 21 A / 300 μs CRI (minimum): 80 Maximum number of Colour temperature [K]: MacAdam Step: 2 MacAdam Step: 2			
Total light flux at or above an angle of 90° [Lm]: Light Output Ratio (L.O.R.) Beam angle [°]: CRI (minimum): MacAdam Step: 2 Assemblies: Intervallo temperatura ambiente: Power factor: See installation instruction Inrush current: 21 A / 300 μs Maximum number of Iuminaires of this type per miniature circuit breaker: B16A: 21 Iuminaires			
an angle of 90° [Lm]: Light Output Ratio (L.O.R.) 81 Beam angle [°]: CRI (minimum): 80 Maximum number of luminaires of this type per MacAdam Step: 2 Intervallo temperatura from -30°C to 50°C. See installation instruction from -30°C to 50°C. Intervallo temperatura ambiente: Power factor: See installation instruction for several from -30°C to 50°C. Maximum current: 21 A / 300 μs Maximum number of luminaires of this type per miniature circuit breaker: B16A: 21 luminaires			
Light Output Ratio (L.O.R.) 81 Beam angle [°]: 46° / 47° CRI (minimum): 80 Colour temperature [K]: 4000 MacAdam Step: 2 Ambiente: Power factor: See installation instruction Inrush current: 21 A / 300 μs Maximum number of Iuminaires of this type per miniature circuit breaker: B16A: 21 Iuminaires			
Power factor: See installation instruction Beam angle [°]: 46° / 47° Inrush current: 21 A / 300 μs CRI (minimum): 80 Maximum number of Iuminaires of this type per MacAdam Step: 2 miniature circuit breaker: B16A: 21 Iuminaires	D.		
Beam angle [°]: 46° / 47° Inrush current: 21 A / 300 μs CRI (minimum): 80 Maximum number of Colour temperature [K]: 4000 luminaires of this type per MacAdam Step: 2 miniature circuit breaker: B16A: 21 luminaires			
CRI (minimum): 80 Maximum number of luminaires of this type per MacAdam Step: 2 Maximum number of luminaires of this type per miniature circuit breaker: B16A: 21 luminaires	See installation instructions		
Colour temperature [K]: 4000 luminaires of this type per MacAdam Step: 2 luminaires of this type per miniature circuit breaker: B16A: 21 luminaires B16A: 21 luminaires			
MacAdam Step: 2 miniature circuit breaker: B16A: 21 luminaires			
MacAdam Step. 2			
LITE TIME LED 1: 100.000n - L90 - B10 (1a 25°C)			
Overvoltage protection: 10kV Common mode & 6			
Differential mode	de a unv		
Control: DALI-2			

Polar

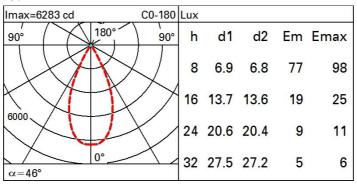

Isolux

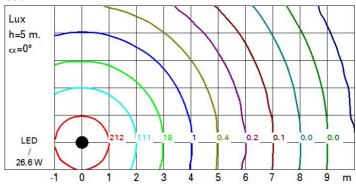

UGR diagram

Rifled		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.30	0.30	0.70	0.70	0.50	0.30	0.30	
		0.20		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed				viewed						
		crosswise					endwise					
2H	2H	5.5	6.1	5.7	6.3	6.5	5.6	6.2	5.9	6.5	6.7	
2.1	3H	5.4	5.9	5.7	6.2	6.5	5.5	6.1	5.8	6.3	6.6	
	4H	5.3	5.8	5.7	6.1	6.4	5.5	6.0	5.8	6.3	6.6	
	бН	5.3	5.7	5.6	6.0	6.4	5.4	5.9	5.7	6.2	6.5	
	HS	5.2	5.7	5.6	6.0	6.3	5.4	5.8	5.7	6.1	6.5	
	12H	5.2	5.6	5.6	6.0	6.3	5.3	5.8	5.7	6.1	6.4	
4H	2H	5.3	5.8	5.6	6.1	6.4	5.5	6.0	5.8	6.3	6.6	
	ЗН	5.2	5.7	5.6	6.0	6.3	5.4	5.8	5.8	6.2	6.5	
	4H	5.2	5.5	5.6	5.9	6.3	5.3	5.7	5.7	6.1	6.5	
	6H	5.1	5.4	5.5	5.8	6.2	5.2	5.6	5.7	6.0	6.4	
	8H	5.1	5.4	5.5	5.8	6.2	5.2	5.5	5.6	5.9	6.4	
	12H	5.0	5.3	5.5	5.7	6.2	5.2	5.4	5.6	5.9	6.	
8Н	4H	5.0	5.3	5.5	5.8	6.2	5.2	5.5	5.7	5.9	6.4	
	6H	5.0	5.2	5.4	5.7	6.1	5.1	5.4	5.6	5.8	6.3	
	HS	4.9	5.1	5.4	5.6	6.1	5.1	5.3	5.6	5.8	6.3	
	12H	4.9	5.1	5.4	5.6	6.1	5.0	5.2	5.5	5.7	6.2	
12H	4H	5.0	5.3	5.5	5.7	6.2	5.2	5.4	5.6	5.9	6.3	
	бН	4.9	5.1	5.4	5.6	6.1	5.1	5.3	5.6	5.8	6.3	
	HS	4.9	5.1	5.4	5.6	6.1	5.0	5.2	5.5	5.7	6.2	
Varia	tions wi	th the ol	oserverp	noitien	at spacir	ng:						
S =	1.0H	6.1 / -7.2					6.1 / -7.3					
	1.5H		8.8 / -8.7					8.8- / 8.8				