iGuzzini


Design iGuzzini / Arup		

Last information update: March 2025

### Product configuration: 443B

443B: round small body spotlight - medium





### Technical description

Indoor adjustable spotlight with adapter for installation on a three-phase/DALI track. Device made of die-cast aluminium and a front part made of a thermoplastic material. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Optical assembly consisting of Neutral White tone 4000K LEDs with OPTIBEAM LENS technology and a medium light beam. Dimmable DALI driver built-in to box with a semi-hidden system on track. Option of installing a range of flat accessories including an OPTIBEAM REFRACTOR for varying light distribution, an elliptical distribution refractor, a louvre, a soft lens and an outdoor accessory like an asymmetric visor for eliminating stray light dispersion on the ceiling.

### Installation

On a three-phase/DALI electrified track


## Colour

Black (04) | Black / White (47)

Weight (Kg) 1.02

Complies with EN60598-1 and pertinent regulations

DALI-2




#### Mounting dali track|three circuit track


Wiring Product complete with DALI dimmable components, housed in a semi-hidden box on the track.



Technical data					
Im system:	1692	MacAdam Step:	2		
W system:	20.5	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)		
Im source:	2020	Lamp code:	LED		
W source:	18	Number of lamps for optical	1		
Luminous efficiency (Im/W, real value):	82.5	assembly:			
		ZVEI Code:	LED		
Im in emergency mode:	-	Number of optical	1		
Total light flux at or above	0	assemblies:			
an angle of 90° [Lm]:		Power factor:	See installation instructions		
Light Output Ratio (L.O.R.)	84	Inrush current:	5 A / 50 μs		
[%]:		Maximum number of			
Beam angle [°]:	26°	luminaires of this type per	B10A: 31 luminaires		
CRI (minimum):	97	miniature circuit breaker:	B16A: 50 luminaires		
Colour temperature [K]:	4000		C10A: 52 luminaires		
			C16A: 85 luminaires		
		Overvoltage protection:	4kV Common mode & 2kV Differential mode		

Control:

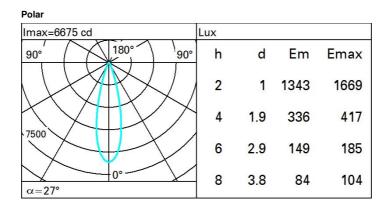

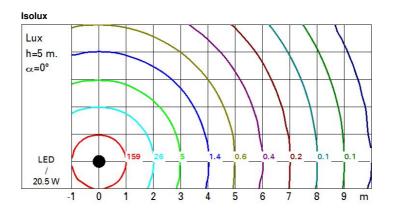

# UGR diagram

Rifle	ct										
ce il/c		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls work pl. Room dim		0.50			0.30	0.30	0.30 0.50 0.20 0.20	0.30	0.50	0.30	0.30
					0.20	0.20					
		viewed				viewed					
x	У		c	rosswis	е				endwise		
2H	2H	13.9	15.9	14.3	16.2	16.5	13.9	15.9	14.3	16.2	16.5
	ЗH	14.7	16.2	15.0	16.5	16.8	14.1	15.7	14.5	16.0	16.3
	4H	14.9	16.2	15.3	16.5	16.9	14.2	15.5	14.6	15.8	16.2
	6H	15.1	16.1	15.5	16.5	16.8	14.3	15.3	14.6	15.6	16.0
	BH	15.1	16.1	15.5	16.5	16.9	14.2	15.2	14.6	15.6	16.0
	12H	<mark>1</mark> 5.1	16.1	15.5	16.5	<mark>16.8</mark>	14.2	15.2	14.6	15.5	15.9
4H	2H	14.2	15.5	14.6	15.8	16.2	14.9	16.2	15.3	16.5	16.9
	ЗH	15.2	16.2	15.6	16.5	16.9	15.4	16.3	15.8	16.7	17.1
	4H	15.5	16.4	15.9	16.8	17.2	15.5	16.4	15.9	16.8	17.2
	6H	15.5	17.0	15.9	17.5	18.0	15.3	16.9	15.8	17.3	17.8
	HS	15.4	17.2	15.9	17.7	18.2	15.2	17.0	15.7	17.5	18.0
	12H	15.4	17.2	15.9	17.7	18.2	15.2	17.0	15.7	17.5	18.0
вн	4H	15.2	17.0	15.7	17.5	18.0	15.4	17.2	15.9	17.7	18.2
	6H	15.5	17.2	16.0	17.7	18.2	15.5	17.3	16.1	17.7	18.3
	BH	15.6	17.1	16.1	17.6	18.2	15.6	17.1	16.1	17.6	18.2
	12H	15.8	16.8	16.3	17.3	17.9	15.8	16.8	16.3	17.3	17.9
12H	4H	15.2	17.0	15.7	17.5	18.0	15.4	17.2	15.9	17.7	18.2
	6H	15.5	17.1	16.1	17.5	18.1	15.6	17.1	16.1	17.6	18.1
	8H	15.8	16.8	16.3	17.3	17.9	15.8	16.8	16.3	17.3	17.9
Varia	itions wi	th the ot	oserver p	osition	at spacin	ig:					
S =	1.0H			.1 / -0					.1 / -0.		
	1.5H 2.0H			.4 / -1.					4 / -1.		