



MK54.01: Empotrable de 10 celdas - LED - Warm white - Flood - Blanco

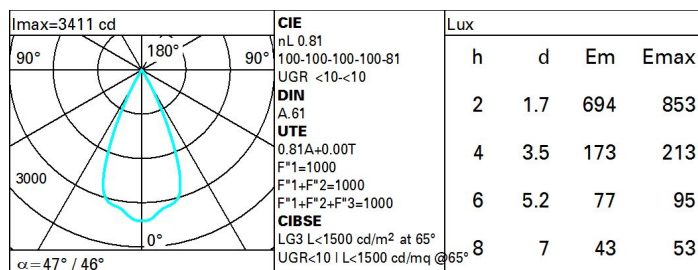



Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	70	67	65	69	66	66	64	78
1.0	76	73	71	69	72	70	70	67	83
1.5	80	78	76	74	77	75	74	72	89
2.0	83	81	79	78	80	78	78	75	93
2.5	84	83	82	81	82	81	80	78	96
3.0	85	84	83	83	83	82	81	79	98
4.0	86	85	85	84	84	84	82	81	99
5.0	87	86	86	86	85	84	83	81	100

Diagrama UGR

Corrected UGR values (at 2200 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	0.7	1.2	1.0	1.4	1.7	0.7	1.2	1.0	1.4	1.7
	3H	0.6	1.0	0.9	1.3	1.6	0.6	1.0	0.9	1.3	1.6
	4H	0.5	0.9	0.8	1.2	1.5	0.5	0.9	0.8	1.2	1.5
	6H	0.4	0.8	0.8	1.1	1.4	0.4	0.8	0.8	1.1	1.4
	8H	0.4	0.8	0.8	1.1	1.4	0.4	0.8	0.8	1.1	1.4
	12H	0.4	0.7	0.7	1.0	1.4	0.4	0.7	0.7	1.0	1.4
4H	2H	0.5	0.9	0.8	1.2	1.5	0.5	0.9	0.8	1.2	1.5
	3H	0.4	0.7	0.7	1.0	1.4	0.4	0.7	0.7	1.0	1.4
	4H	0.3	0.6	0.7	0.9	1.3	0.3	0.6	0.7	0.9	1.3
	6H	0.2	0.5	0.6	0.9	1.3	0.2	0.5	0.6	0.9	1.3
	8H	0.1	0.4	0.6	0.8	1.2	0.1	0.4	0.6	0.8	1.2
	12H	0.1	0.3	0.5	0.7	1.2	0.1	0.3	0.5	0.7	1.2
8H	4H	0.1	0.4	0.6	0.8	1.2	0.1	0.4	0.6	0.8	1.2
	6H	0.0	0.2	0.5	0.7	1.2	0.0	0.2	0.5	0.7	1.2
	8H	-0.0	0.2	0.5	0.6	1.1	-0.0	0.2	0.5	0.6	1.1
	12H	-0.1	0.1	0.4	0.6	1.1	-0.1	0.1	0.4	0.6	1.1
12H	4H	0.1	0.3	0.5	0.7	1.2	0.1	0.3	0.5	0.7	1.2
	6H	-0.0	0.2	0.5	0.6	1.1	-0.0	0.2	0.5	0.6	1.1
	8H	-0.1	0.1	0.4	0.6	1.1	-0.1	0.1	0.4	0.6	1.1
Variations with the observer position at spacing:											
S =		1.0H	0.8	/ -21.9				6.8	/ -21.9		
		1.5H	9.7	/ -22.0				9.7	/ -22.0		
		2.0H	11.7	/ -22.2				11.7	/ -22.2		