

## Laser Blade


Design iGuzzini

iGuzzini

Last information update: March 2025

### Product configuration: MM78.83

MM78.83: 5 - cell Recessed luminaire - LED - Warm white - Incorporated DALI dimmable power supply - Wide Flood optic - 13W  
704.9lm - 2700K - CRI 95 - Black Transparent

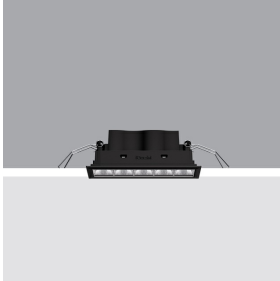

### Product code

MM78.83: 5 - cell Recessed luminaire - LED - Warm white - Incorporated DALI dimmable power supply - Wide Flood optic - 13W  
704.9lm - 2700K - CRI 95 - Black Transparent

### Technical description

rectangular miniaturised recessed luminaire with 5 optical elements with LED lamps - fixed optics - wide flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with DALI dimmable electronic control gear connected to the luminaire. Warm white high colour rendering LED

### Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141

### Colour

Black Transparent (83)

### Weight (Kg)


0.29

### Mounting

wall recessed|ceiling recessed

### Wiring

on control gear box; screw connections with terminal block included



Complies with EN60598-1 and pertinent regulations



### Technical data

lm system:	689	CRI (typical):	97
W system:	13	Colour temperature [K]:	2700
lm source:	850	MacAdam Step:	3
W source:	10	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	53	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	48°	Control:	DALI-2
CRI (minimum):	95		


### Polar

Imax=1195 cd		C0-180		CIE		Lux					
90°		180°	90°	nL 0.81	97-99-100-100-81	h	d1	d2	Em	Emax	
				UGR <10-10	DIN A.61	1	0.9	0.9	1003	1191	
				UTE 0.81A+0.00T	F*1=975	2	1.8	1.8	251	298	
				F*1+F*2=993	F*1+F*2+F*3=999	3	2.6	2.7	111	132	
				CIBSE LG3 L<3000 cd/m² at 65°	UGR<10   L<3000 cd/mq @65°	4	3.5	3.6	63	74	

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	63	68	65	65	62	77
1.0	76	72	69	68	71	69	69	66	81
1.5	80	77	75	73	76	74	73	71	87
2.0	82	80	79	77	79	78	77	74	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	82	82	81	79	97
4.0	86	85	84	84	84	83	82	80	99
5.0	86	86	85	85	84	84	83	81	100

# Luminance curve limit

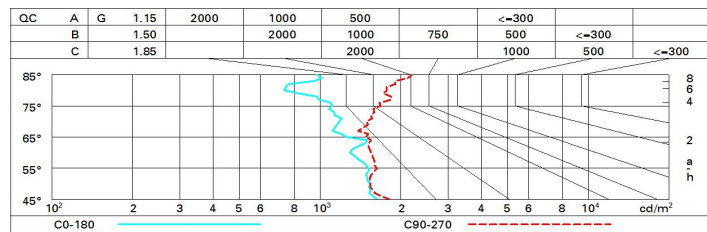

# UGR diagram

Corrected UGR values (at 850 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
	3H	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
	4H	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
	6H										
	8H										
	12H										
4H	2H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	3H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	4H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	6H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	8H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	12H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
8H	2H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	3H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	4H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	6H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	8H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	12H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
12H	2H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	3H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	4H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	6H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	8H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	12H	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Variations with the observer position at spacing:											
S =	1.0H	2.0 / -2.5					1.7 / -1.7				
	1.5H	4.5 / -2.8					3.2 / -2.0				
	2.0H	6.3 / -3.6					4.8 / -2.4				