

Design iGuzzini iGuzzini

Product configuration: MQ78.E7

Product code

Technical description

Installation

Colour

White / burnished chrome (E7)*

Weight (Kg)

0.29

* Colours on request

Mounting

mounting
wall recessed|ceiling recessed

Wiring

on control gear box: screw connections with terminal block included


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	891	CRI (typical):	92
W system:	13	Colour temperature [K]:	3000
Im source:	1100	MacAdam Step:	3
W source:	9.9	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	68.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	32°	Control:	DALI-2
CRI (minimum):	90		

Polar

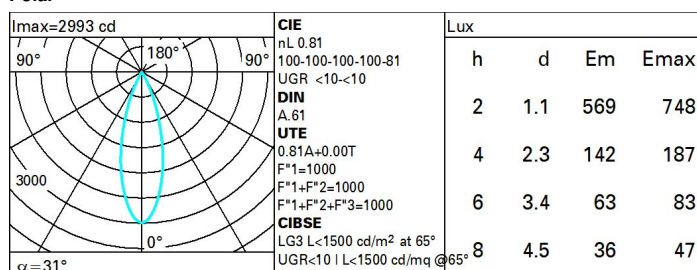

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	70	67	65	69	66	66	64	78
1.0	76	73	71	69	72	70	70	67	83
1.5	80	78	76	74	77	75	74	72	89
2.0	83	81	79	78	80	78	78	75	93
2.5	84	83	82	81	82	81	80	78	96
3.0	85	84	83	83	83	82	81	79	98
4.0	86	85	85	84	84	84	82	81	99
5.0	87	86	86	86	85	84	83	81	100

UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-7.8	-7.3	-7.5	-7.1	-6.8	-7.8	-7.3	-7.5	-7.1	-6.8
	3H	-7.9	-7.5	-7.6	-7.2	-6.9	-7.9	-7.5	-7.6	-7.2	-6.9
	4H	-8.0	-7.6	-7.7	-7.3	-7.0	-8.0	-7.6	-7.7	-7.3	-7.0
	6H	-8.1	-7.7	-7.7	-7.4	-7.0	-8.1	-7.7	-7.7	-7.4	-7.1
	8H	-8.1	-7.7	-7.8	-7.4	-7.1	-8.1	-7.7	-7.8	-7.4	-7.1
	12H	-8.1	-7.8	-7.8	-7.4	-7.1	-8.2	-7.8	-7.8	-7.5	-7.1
4H	2H	-8.0	-7.6	-7.7	-7.3	-7.0	-8.0	-7.6	-7.7	-7.3	-7.0
	3H	-8.2	-7.8	-7.8	-7.5	-7.1	-8.2	-7.8	-7.8	-7.4	-7.1
	4H	-8.2	-7.9	-7.9	-7.6	-7.2	-8.2	-7.9	-7.9	-7.6	-7.2
	6H	-8.3	-8.0	-7.9	-7.6	-7.2	-8.3	-8.0	-7.9	-7.6	-7.2
	8H	-8.4	-8.1	-7.9	-7.7	-7.2	-8.4	-8.1	-7.9	-7.7	-7.3
	12H	-8.4	-8.2	-7.9	-7.7	-7.3	-8.4	-8.2	-8.0	-7.8	-7.3
8H	4H	-8.4	-8.1	-7.9	-7.7	-7.3	-8.4	-8.1	-7.9	-7.7	-7.2
	6H	-8.5	-8.2	-8.0	-7.8	-7.3	-8.4	-8.2	-8.0	-7.8	-7.3
	8H	-8.5	-8.3	-8.0	-7.8	-7.3	-8.5	-8.3	-8.0	-7.8	-7.3
	12H	-8.5	-8.3	-8.0	-7.9	-7.3	-8.5	-8.4	-8.0	-7.9	-7.4
12H	4H	-8.4	-8.2	-8.0	-7.8	-7.3	-8.4	-8.2	-7.9	-7.7	-7.3
	6H	-8.5	-8.3	-8.0	-7.9	-7.4	-8.5	-8.3	-8.0	-7.8	-7.3
	8H	-8.5	-8.4	-8.0	-7.9	-7.4	-8.5	-8.3	-8.0	-7.9	-7.3
Variations with the observer position at spacing:											
S =		1.0H	6.7 / -11.6				6.7 / -11.6				
		1.5H	9.6 / -12.2				9.6 / -12.2				
		2.0H	11.5 / -12.6				11.5 / -12.6				