

Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	67	65	69	67	66	64	76
1.0	78	74	71	69	73	71	70	68	80
1.5	82	79	77	75	78	76	75	73	87
2.0	85	83	81	80	82	80	79	77	91
2.5	87	85	84	82	84	82	82	79	94
3.0	88	87	85	85	85	84	83	81	96
4.0	89	88	87	87	86	86	85	82	98
5.0	89	89	88	88	87	87	85	83	99

Curva limite di luminanza

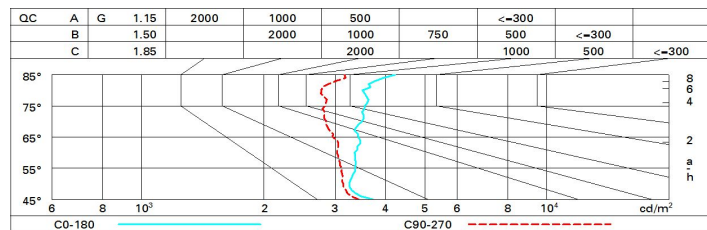


Diagramma UGR

Corrected UGR values (at 930 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	11.5	12.0	11.7	12.2	12.5	10.9	11.5	11.2	11.7	11.9
	3H	12.1	12.6	12.4	12.8	13.1	11.0	11.5	11.4	11.8	12.1
	4H	12.4	12.9	12.8	13.2	13.5	11.1	11.5	11.4	11.8	12.1
	6H	12.7	13.2	13.1	13.5	13.8	11.1	11.5	11.5	11.8	12.2
	8H	12.9	13.3	13.2	13.6	13.9	11.1	11.5	11.5	11.8	12.2
	12H	13.0	13.4	13.4	13.7	14.1	11.1	11.5	11.4	11.8	12.2
4H	2H	11.6	12.0	11.9	12.3	12.6	11.6	12.1	11.9	12.4	12.7
	3H	12.4	12.8	12.8	13.2	13.5	12.0	12.3	12.3	12.7	13.0
	4H	13.0	13.3	13.4	13.7	14.1	12.1	12.5	12.5	12.8	13.2
	6H	13.5	13.8	13.9	14.2	14.6	12.2	12.5	12.7	12.9	13.4
	8H	13.6	13.9	14.1	14.3	14.8	12.3	12.6	12.7	13.0	13.4
	12H	13.8	14.1	14.3	14.5	15.0	12.3	12.5	12.7	13.0	13.4
8H	4H	13.1	13.4	13.5	13.8	14.2	12.6	12.9	13.1	13.3	13.8
	6H	13.7	13.9	14.2	14.4	14.9	12.9	13.1	13.4	13.6	14.0
	8H	14.0	14.2	14.5	14.7	15.1	13.0	13.2	13.5	13.7	14.2
	12H	14.3	14.4	14.8	14.9	15.4	13.1	13.3	13.6	13.7	14.3
12H	4H	13.1	13.3	13.5	13.8	14.2	12.8	13.0	13.2	13.5	13.9
	6H	13.7	13.9	14.2	14.4	14.9	13.1	13.3	13.6	13.7	14.2
	8H	14.0	14.2	14.5	14.7	15.2	13.2	13.4	13.7	13.9	14.4
Variations with the observer position at spacing:											
S =	1.0H	1.5 / -1.0					2.0 / -1.2				
	1.5H	3.0 / -1.2					3.7 / -1.5				
	2.0H	4.5 / -1.5					5.3 / -1.7				