


Last information update: November 2024

Product configuration: N359+N374.04

N359: Initial module L 2405Minimal

N374.04: Plate - wall washer - DALI - LED warm - L 1196 - 17W 2900lm - 3000K - Black



Product code

N359: Initial module L 2405Minimal

Technical description

Minimal (frameless) version extruded aluminium initial profile; a double length version designed to house 2 x Wall Washer emission LED plates.

Installation

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with accessory caps and the required LED module.

Colour

White (01) | Black (04) | Aluminium (12)

Weight (Kg)

5.4

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

The initial profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks for easier luminaire installation. Set up to house the LED modules required by the system.

Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



Product code

N374.04: Plate - wall washer - DALI - LED warm - L 1196 - 17W 2900lm - 3000K - Black

Technical description

LED module set up for housing in iN60 Wall Washer system initial or intermediate profiles. Extruded aluminium heat sink linear element, formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. Supplied with integrated dimmable DALI control gear. Warm white LED.

Installation

Module insertion on profiles with a mechanical easy-push system (steel snap-on spring).

Colour

Black (04)

Weight (Kg)

1.94

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

Quick coupling terminal block connection for simplified luminaire installation. LED module complete with integrated DALI control gear. Dimming options with DALI devices or a normally open (N.O.) pushbutton (PUSH DIM)

Notes

The module houses the specific optic system for wall washer emission; to ensure correct installation consult the instruction leaflet.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	3538	CRI (minimum):	80
W system:	41.5	Colour temperature [K]:	3000
lm source:	5800	MacAdam Step:	3
W source:	34	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	85.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	1

Polar

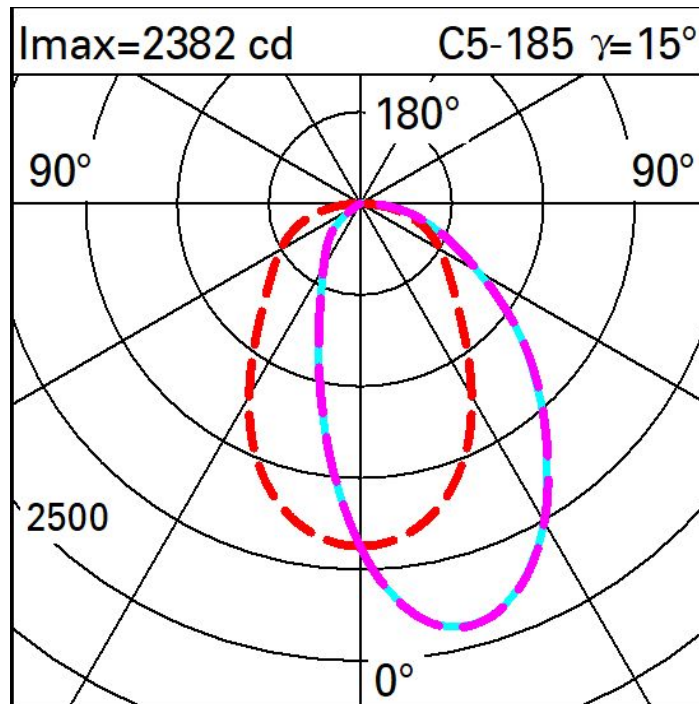

Illuminances

Lux													Wall distance = 1m	
3														
	11	23	51	120	283	426	283	120	51	23	11			
2	17	32	65	153	356	485	356	153	65	32	17			
	18	33	68	152	265	326	265	152	68	33	18			
1	19	33	64	117	174	202	174	117	64	33	19			
	18	32	54	84	110	123	110	84	54	32	18			
0														
	m	-2	-1	0	1	2	3							