


Design iGuzzini iGuzzini



P731.74: Frame Adjustable Recessed Luminaire - Neutral White LED - Wide Flood beam - DALI - Grey/Black

P731.74: Frame Adjustable Recessed Luminaire - Neutral White LED - Wide Flood beam - DALI - Grey/Black

Recessed luminaire with adjustable optic for neutral white LED. Passive cooling system. Adjustable body can be rotated within the recess to ensure precise but comfortable lighting and considerably reduced direct glare. 355° internal rotation and max 30° oscillation with continuous friction. Fixed recess structure in die-cast aluminium with perimeter stop frame. The recessed luminaire includes a radiant aluminium element, a steel junction for the optical assembly and a thermoplastic rotation ring. Metallised thermoplastic reflector with high definition optic and wide flood beam aperture. External thermoplastic anti-glare screen. Transparent protection glass for LED light source. Supplied with DALI dimmable power supply unit connected to the luminaire.

Recessed with torsional steel springs - 1 mm minimum thickness of false ceiling - recess opening 76 x 76 mm.

**Weight (Kg)**  
0.53

\* Colours on request

wall recessed|ceiling recessed


Quick-fit power supply connection to terminal block - Digital electronic wiring enables dimming with DALI or TOUCH DIM systems.

Vast range of technical and decorative accessories available: option to install 2 accessories at the same time.

Complies with EN60598-1 and pertinent regulations




Im system:	769	Colour temperature [K]:	4000
W system:	8.6	MacAdam Step:	2
Im source:	1100	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	6.5	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	89.4	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	70	Number of optical assemblies:	1
Beam angle [°]:	50°	Control:	DALI-2
CRI (minimum):	80		

	<b>I</b> max=1171 cd <b>CIE</b> nL 0.70 100-100-100-100-70 UGR <10-10 <b>DIN</b> A.61 <b>UTE</b> 0.70A+0.00T F*1=997 F*1+F*2=1000 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m² at 65° UGR<10   L<1500 cd/mq @65°	<b>Lux</b>			
	<b>h</b>	<b>d</b>	<b>Em</b>	<b>Emax</b>	
	1	0.9	982	1164	
	2	1.9	246	291	
	3	2.8	109	129	
4	3.7	61	73		

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	63	60	58	56	59	57	57	55	78
1.0	66	63	61	59	62	60	60	58	83
1.5	69	67	65	64	66	65	64	62	89
2.0	71	70	68	67	69	68	67	65	93
2.5	73	71	70	70	70	70	69	67	96
3.0	73	73	72	71	72	71	70	68	98
4.0	74	74	73	73	73	72	71	69	99
5.0	75	74	74	74	73	73	72	70	100

# Luminance curve limit

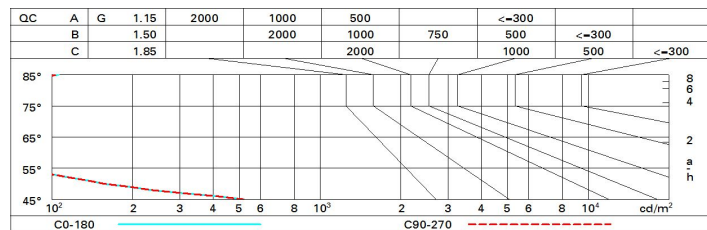

# UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	10.5	11.0	10.7	11.2	11.5	10.5	11.0	10.7	11.2	11.5
	3H	10.3	10.8	10.6	11.1	11.3	10.3	10.8	10.6	11.1	11.3
	4H	10.3	10.7	10.6	11.0	11.3	10.3	10.7	10.6	11.0	11.3
	6H	10.2	10.6	10.5	10.9	11.2	10.2	10.6	10.5	10.9	11.2
	8H	10.1	10.5	10.5	10.9	11.2	10.1	10.5	10.5	10.9	11.2
	12H	10.1	10.5	10.5	10.8	11.2	10.1	10.5	10.5	10.8	11.2
4H	2H	10.3	10.7	10.6	11.0	11.3	10.3	10.7	10.6	11.0	11.3
	3H	10.1	10.5	10.5	10.8	11.2	10.1	10.5	10.5	10.8	11.2
	4H	10.0	10.3	10.4	10.7	11.1	10.0	10.3	10.4	10.7	11.1
	6H	9.9	10.2	10.3	10.6	11.0	9.9	10.2	10.3	10.6	11.0
	8H	9.9	10.1	10.3	10.6	11.0	9.9	10.1	10.3	10.6	11.0
	12H	9.8	10.1	10.3	10.5	11.0	9.8	10.1	10.3	10.5	11.0
8H	4H	9.9	10.1	10.3	10.6	11.0	9.9	10.1	10.3	10.6	11.0
	6H	9.8	10.0	10.3	10.5	10.9	9.8	10.0	10.3	10.5	10.9
	8H	9.7	9.9	10.2	10.4	10.9	9.7	9.9	10.2	10.4	10.9
	12H	9.7	9.8	10.2	10.3	10.8	9.7	9.8	10.2	10.3	10.8
12H	4H	9.8	10.1	10.3	10.5	11.0	9.8	10.1	10.3	10.5	11.0
	6H	9.7	9.9	10.2	10.4	10.9	9.7	9.9	10.2	10.4	10.9
	8H	9.7	9.8	10.2	10.3	10.8	9.7	9.8	10.2	10.3	10.8
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.4					6.5 / -24.4				
	1.5H	9.3 / -25.0					9.3 / -25.0				
	2.0H	11.3 / -25.3					11.3 / -25.3				