

Laser Blade XL



Design iGuzzini

iGuzzini

Last information update: April 2025

Product configuration: P779.74

P779.74: Fixed recessed luminaire - Warm LED - DALI dimmable control gear - Wide Flood - Grey / Black

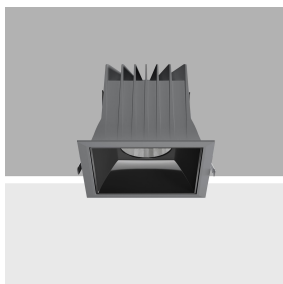

Product code

P779.74: Fixed recessed luminaire - Warm LED - DALI dimmable control gear - Wide Flood - Grey / Black

Technical description

Fixed optic, recessed luminaire for a Warm White LED lamp with a high color rendering index. Passive heat dissipation system. Lamp body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam optic, integrated in a set-back position in the anti-glare screen. Glass cover for LED lamp. The structure of the optic system produces light emission with controlled luminance (UGR < 19) to guarantee high visual comfort. Supplied with a dimmable DALI ballast connected to the luminaire.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 125 x 125. Installation possible in a horizontal position.

Colour

Grey / Black (74)*

Weight (Kg)

0.86

* Colours on request

Mounting

ceiling recessed

Wiring

Quick-coupling connections on the ballast unit terminal block - Digital electronic cabling that allows dimming to be performed with DALI protocol or pushbutton systems (TOUCH DIM)

Notes

The product has a white finish (01) that maintains its UGR < 19 performance unaltered even when luminance values vary slightly.

Complies with EN60598-1 and pertinent regulations



IP20

IP44

On the visible part of the product once installed



pending

Technical data

Im system:	2620	CRI (minimum):	90
W system:	32.1	Colour temperature [K]:	3000
Im source:	3450	MacAdam Step:	2
W source:	28	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	81.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	76	Number of optical assemblies:	1
Beam angle [°]:	54°	Control:	DALI-2


Polar

Imax=4006 cd		CIE		Lux			
90°	180°	nL 0.76	99-100-100-100-76	h	d	Em	E _{max}
		UGR 13.9-13.9	DIN A.61	2	2	736	1002
		UTE 0.76A+0.00T	F*1=992	4	4	184	250
		F*1+F*2=1000	F*1+F*2+F*3=1000	6	6.1	82	111
		CIBSE LG3 L<1500 cd/m² at 65°	UGR<16 L<1500 cd/mq @ 65°	8	8.1	46	63
α=54°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	65	62	60	64	62	62	59	78
1.0	71	68	66	64	67	65	65	63	82
1.5	75	73	71	69	72	70	69	67	88
2.0	77	76	74	73	75	73	72	70	93
2.5	79	77	76	76	76	75	75	73	96
3.0	80	79	78	77	78	77	76	74	98
4.0	81	80	80	79	79	78	77	75	99
5.0	81	81	80	80	79	79	78	76	100

Luminance curve limit

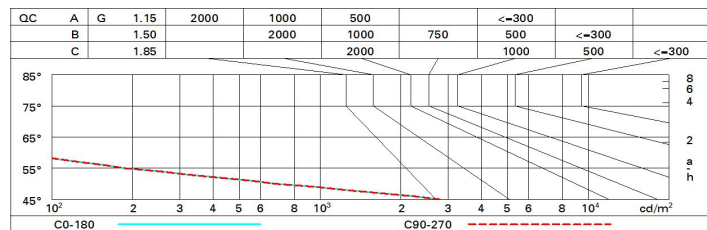

UGR diagram

Corrected UGR values (at 3450 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	14.5	15.1	14.8	15.3	15.5	14.5	15.1	14.8	15.3	15.5
	3H	14.4	14.9	14.7	15.1	15.4	14.4	14.9	14.7	15.1	15.4
	4H	14.3	14.8	14.6	15.1	15.4	14.3	14.8	14.6	15.1	15.4
	6H	14.2	14.7	14.6	15.0	15.3	14.2	14.7	14.6	15.0	15.3
	8H	14.2	14.6	14.5	14.9	15.3	14.2	14.6	14.5	14.9	15.3
	12H	14.1	14.5	14.5	14.9	15.2	14.1	14.5	14.5	14.9	15.2
4H	2H	14.3	14.8	14.6	15.1	15.4	14.3	14.8	14.6	15.1	15.4
	3H	14.1	14.5	14.5	14.9	15.2	14.1	14.5	14.5	14.9	15.2
	4H	14.0	14.4	14.4	14.8	15.2	14.0	14.4	14.4	14.8	15.2
	6H	13.9	14.3	14.4	14.7	15.1	13.9	14.3	14.4	14.7	15.1
	8H	13.9	14.2	14.3	14.6	15.0	13.9	14.2	14.3	14.6	15.0
	12H	13.9	14.1	14.3	14.5	15.0	13.9	14.1	14.3	14.5	15.0
8H	4H	13.9	14.2	14.3	14.6	15.0	13.9	14.2	14.3	14.6	15.0
	6H	13.8	14.0	14.3	14.5	15.0	13.8	14.0	14.3	14.5	15.0
	8H	13.8	14.0	14.2	14.4	14.9	13.8	14.0	14.2	14.4	14.9
	12H	13.7	13.9	14.2	14.4	14.9	13.7	13.9	14.2	14.4	14.9
12H	4H	13.9	14.1	14.3	14.5	15.0	13.9	14.1	14.3	14.5	15.0
	6H	13.8	14.0	14.2	14.4	14.9	13.8	14.0	14.2	14.4	14.9
	8H	13.7	13.9	14.2	14.4	14.9	13.7	13.9	14.2	14.4	14.9
Variations with the observer position at spacing:											
S =	1.0H	6.4 / -27.7					6.4 / -27.7				
	1.5H	9.2 / -31.6					9.2 / -31.6				
	2.0H	11.2 / -32.7					11.2 / -32.7				