

Last information update: March 2025

Product configuration: PG95.G1

PG95.G1: Module for Superrail 48V track - DALI - UGR<19 - L=1368 - Continuous line - 10.3W 1360lm - 3500K - CRI 90 - Black/Black Transparent

**Product code**

PG95.G1: Module for Superrail 48V track - DALI - UGR<19 - L=1368 - Continuous line - 10.3W 1360lm - 3500K - CRI 90 - Black/Black Transparent

Technical description

Linear lighting product with 3500K CRI90 monochrome LED complete with adapter for installation on a Superrail 48V track. UGR<19 luminaire with controlled luminance ($L \leq 3000 \text{ cd/m}^2$) ideal for environments with video screen use. Opti-Diamond Space optic available in a White Cover (Transparent white) or Black Cover (Transparent black) version. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «power line» technology allows each light module on the track to be adjusted separately. Frameless version main body made of extruded aluminium. A rapid tool-free system for connecting the adapter electrically and mechanically to the track. Module for continuous line not including caps (to be ordered as an accessory).

Installation

Mechanical fastening with adapter on a Superrail 48V track. Close the continuous line with a pair of caps to be ordered separately.

Colour

Black/Black Transparent (G1)

Weight (Kg)

0.75

Mounting

Low voltage track

Wiring

Integrated DC/DC LED driver in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	1232	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	10.3	Voltage [Vin]:	48
Im source:	1600	Lamp code:	LED
W source:	8.7	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	119.6	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	23	LED current [mA]:	36
Light Output Ratio (L.O.R.) [%]:	77	Power factor:	See installation instructions
CRI (minimum):	90	Minimum dimming %:	5
Colour temperature [K]:	3500	Overvoltage protection:	2kV Common mode & 1kV Differential mode
MacAdam Step:	3	Control:	DALI


Polar

Imax=1298 cd		C75-255		CIE		Lux	
90°	180°	90°		nL 0.77		h	d1 d2 Em Emax
				94-99-99-98-77		1	1.1 1.2 996 1265
				UGR 13.3-12.7		2	2.3 2.3 249 316
				DIN A.61		3	3.4 3.5 111 141
				UTE 0.76A+0.01T		4	4.6 4.6 62 79
				F*1=940			
				F*1+F*2=985			
				F*1+F*2+F*3=994			
				CIBSE LG3 L<3000 cd/m² at 65°			
				UGR<16 L<3000 cd/mq @65°			
$\alpha = 60^\circ$							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	67	63	60	58	62	59	59	56	74
1.0	70	66	64	62	65	63	63	60	79
1.5	74	71	69	67	70	68	67	65	86
2.0	77	75	73	72	73	72	71	68	90
2.5	78	77	75	74	75	74	73	71	93
3.0	80	78	77	76	77	76	75	72	96
4.0	81	80	79	78	78	77	76	74	97
5.0	81	80	80	79	79	78	77	74	99

Luminance curve limit

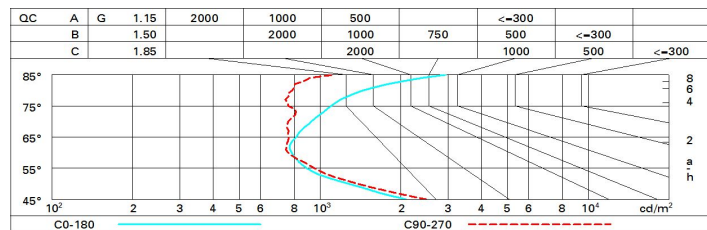

UGR diagram

Corrected UGR values (at 1000 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	13.1	13.6	13.4	13.9	14.2	13.0	13.6	13.3	13.8	14.1
	3H	13.0	13.5	13.4	13.8	14.2	12.9	13.4	13.2	13.7	14.0
	4H	13.0	13.5	13.4	13.9	14.2	12.8	13.3	13.2	13.6	14.0
	6H	13.1	13.6	13.5	13.9	14.3	12.7	13.2	13.1	13.5	13.9
	8H	13.2	13.6	13.6	14.0	14.4	12.7	13.1	13.1	13.5	13.9
	12H	13.4	13.8	13.8	14.2	14.6	12.7	13.1	13.1	13.5	13.8
4H	2H	12.9	13.4	13.2	13.7	14.0	12.9	13.4	13.3	13.7	14.1
	3H	12.9	13.3	13.3	13.6	14.0	12.8	13.2	13.2	13.6	14.0
	4H	12.9	13.3	13.3	13.7	14.1	12.8	13.1	13.2	13.5	14.0
	6H	13.1	13.4	13.5	13.8	14.3	12.7	13.0	13.2	13.5	13.9
	8H	13.3	13.6	13.7	14.0	14.5	12.7	13.0	13.2	13.4	13.9
	12H	13.6	13.8	14.0	14.3	14.8	12.7	12.9	13.2	13.4	13.9
8H	4H	12.8	13.1	13.3	13.6	14.1	12.8	13.1	13.3	13.5	14.0
	6H	13.1	13.4	13.6	13.8	14.3	12.8	13.1	13.3	13.5	14.0
	8H	13.4	13.6	13.9	14.1	14.6	12.8	13.0	13.3	13.5	14.1
	12H	13.8	14.0	14.4	14.5	15.1	12.9	13.0	13.4	13.6	14.1
12H	4H	12.8	13.1	13.3	13.5	14.0	12.8	13.1	13.3	13.6	14.1
	6H	13.1	13.3	13.6	13.8	14.3	12.9	13.1	13.4	13.6	14.1
	8H	13.4	13.6	13.9	14.1	14.7	12.9	13.1	13.5	13.6	14.2
Variations with the observer position at spacing:											
S =	1.0H	3.4 / -3.0					4.0 / -4.7				
	1.5H	5.8 / -3.2					6.6 / -5.0				
	2.0H	7.7 / -3.4					8.6 / -5.1				