

Last information update: March 2025

**Product configuration: PG95.G2**

PG95.G2: Module for Superrail 48V track - DALI - UGR&lt;19 - L=1368 - Continuous line - 10.3W 1360lm - 3500K - CRI 90 - Black/White Transparent

**Product code**

PG95.G2: Module for Superrail 48V track - DALI - UGR&lt;19 - L=1368 - Continuous line - 10.3W 1360lm - 3500K - CRI 90 - Black/White Transparent

**Technical description**

Linear lighting product with 3500K CRI90 monochrome LED complete with adapter for installation on a Superrail 48V track. UGR<19 luminaire with controlled luminance ( $L \leq 3000 \text{cd/m}^2$ ) ideal for environments with video screen use. Opti-Diamond Space optic available in a White Cover (Transparent white) or Black Cover (Transparent black) version. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «power line» technology allows each light module on the track to be adjusted separately. Frameless version main body made of extruded aluminium. A rapid tool-free system for connecting the adapter electrically and mechanically to the track. Module for continuous line not including caps (to be ordered as an accessory).

**Installation**

Mechanical fastening with adapter on a Superrail 48V track. Close the continuous line with a pair of caps to be ordered separately.

**Colour**

Black/White Transparent (G2)

**Weight (Kg)**

0.75

**Mounting**

Low voltage track

**Wiring**

Integrated DC/DC LED driver in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	1360	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	10.3	Voltage [Vin]:	48
Im source:	1600	Lamp code:	LED
W source:	8.7	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	132	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	26	LED current [mA]:	36
Light Output Ratio (L.O.R.) [%]:	85	Power factor:	See installation instructions
CRI (minimum):	90	Minimum dimming %:	5
Colour temperature [K]:	3500	Overvoltage protection:	2kV Common mode & 1kV Differential mode
MacAdam Step:	3	Control:	DALI


**Polar**

<p>Imax=1321 cd C85-265 90° 180° 90° 1500 0° α=61°</p>	<b>CIE</b> nL 0.85 89-96-99-98-85 UGR 15.9-15.1 <b>DIN</b> A.61 <b>UTE</b> 0.83A+0.02T F*1=893 F*1+F*2=964 F*1+F*2+F*3=989	<b>Lux</b>			
		h	d1	d2	Em Emax
		1	1.2	1.2	1023 1291
		2	2.3	2.3	256 323
		3	3.5	3.5	114 143
4	4.7	4.6	64 81		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	67	63	61	66	63	62	59	70
1.0	76	71	68	65	70	67	67	63	76
1.5	81	77	74	72	76	73	72	69	83
2.0	84	81	79	77	80	78	77	73	88
2.5	86	84	82	80	82	80	79	76	91
3.0	87	85	84	83	84	82	81	78	94
4.0	88	87	86	85	85	84	83	80	96
5.0	89	88	87	87	86	85	84	81	97

Luminance curve limit

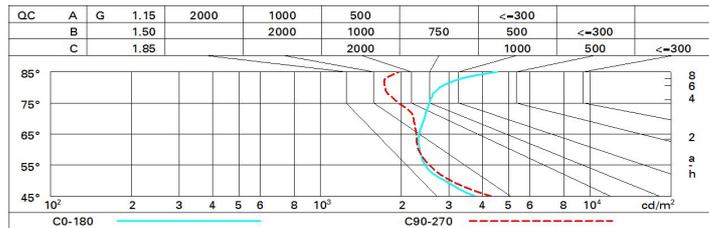

UGR diagram

Corrected UGR values (at 1600 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	14.1	14.7	14.4	15.0	15.3	14.3	15.0	14.7	15.3	15.5
	3H	14.5	15.1	14.9	15.4	15.7	14.3	14.9	14.7	15.2	15.5
	4H	14.8	15.4	15.2	15.7	16.0	14.3	14.9	14.7	15.2	15.5
	6H	15.1	15.6	15.5	16.0	16.4	14.3	14.8	14.7	15.1	15.5
	8H	15.3	15.8	15.7	16.2	16.6	14.3	14.8	14.7	15.1	15.5
	12H	15.6	16.1	16.0	16.4	16.8	14.2	14.7	14.6	15.1	15.5
4H	2H	14.1	14.6	14.4	14.9	15.3	14.8	15.4	15.2	15.7	16.0
	3H	14.7	15.1	15.1	15.5	15.9	15.0	15.4	15.4	15.8	16.2
	4H	15.1	15.5	15.5	15.9	16.3	15.0	15.4	15.5	15.8	16.3
	6H	15.6	15.9	16.0	16.4	16.8	15.1	15.5	15.6	15.9	16.3
	8H	15.9	16.2	16.3	16.7	17.1	15.1	15.4	15.6	15.9	16.4
	12H	16.3	16.6	16.8	17.0	17.5	15.1	15.4	15.6	15.9	16.4
8H	4H	15.2	15.5	15.6	15.9	16.4	15.3	15.7	15.8	16.1	16.6
	6H	15.8	16.1	16.3	16.6	17.1	15.5	15.8	16.0	16.3	16.8
	8H	16.2	16.5	16.7	17.0	17.5	15.6	15.8	16.1	16.3	16.9
	12H	16.8	17.0	17.4	17.5	18.1	15.7	15.9	16.2	16.4	17.0
12H	4H	15.1	15.4	15.6	15.9	16.4	15.4	15.7	15.9	16.2	16.7
	6H	15.8	16.1	16.4	16.6	17.1	15.6	15.9	16.1	16.4	16.9
	8H	16.3	16.5	16.9	17.1	17.6	15.8	16.0	16.3	16.5	17.1
Variations with the observer position at spacing:											
S =	1.0H	1.8 / -1.1				2.3 / -1.7					
	1.5H	3.5 / -1.3				4.4 / -2.0					
	2.0H	5.1 / -1.4				6.1 / -2.1					