


Last information update: November 2024

Product configuration: Q371+QH89.12

Q371: Minimal continuous line module General Up/Down Light L 3594

QH89.12: Plate - Up / Down - General Light - ON-OFF - Neutral LED - L 3588 - 151.9W 16048lm - 4000K - Aluminium



Product code

Q371: Minimal continuous line module General Up/Down Light L 3594

Technical description

Extruded aluminium intermediate profile - Minimal (frameless) version for flush with ceiling mounting and up-down emission; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately; mechanical systems for connecting modules included in the package.

Colour

White (01) | Aluminium (12)

Weight (Kg)

8.45

Mounting

wall surface

Wiring

Set up to house the up-down LED modules required by the system.

Notes

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



IP20



Product code

QH89.12: Plate - Up / Down - General Light - ON-OFF - Neutral LED - L 3588 - 151.9W 16048lm - 4000K - Aluminium **Attention!**

Code no longer in production

Technical description

LED module set up for housing in initial or intermediate system profiles, ideal for particularly long light lines. Up + down emission for General Light profiles (with lower opal diffuser screen). Electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Neutral 4000K LED

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00) | White (01)

Weight (Kg)

4.9

Wiring

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated ON-OFF - non-dimmable control gear.

Notes

Important: the triple length intermediate luminous module can be used for both initial profiles - L 3594 - for stand-alone applications, and intermediate profiles - L 3594 - for continuous line applications.

Complies with EN60598-1 and pertinent regulations



IP20




pending

Technical data

lm system:	16048	Colour temperature [K]:	4000
W system:	151.9	MacAdam Step:	3
lm source:	23600	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	134	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	105.6	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	4546	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	68	Number of optical assemblies:	1
CRI (minimum):	80		

Polar

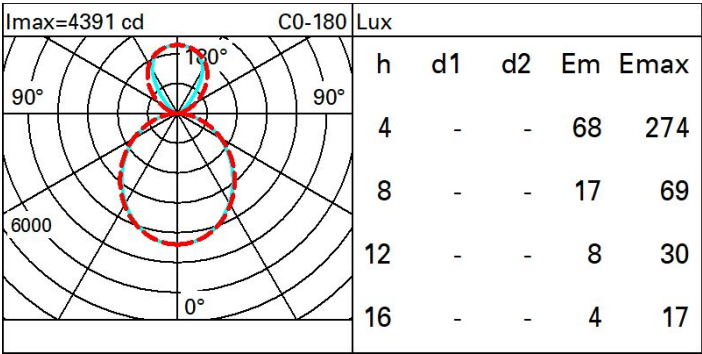

Isolux

