

Laser Blade XS



Design iGuzzini

iGuzzini

Last information update: February 2025

Product configuration: Q505

Q505: Frame 9 cells - Wideflood beam - LED



Product code

Q505: Frame 9 cells - Wideflood beam - LED

Technical description

Square miniaturised recessed luminaire with 9 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of visual comfort. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Supplied with DALI power supply unit connected to the luminaire.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 60 x 60.

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Grey / Black (74)* | White / burnished chrome (E7)*

Weight (Kg)

0.3

* Colours on request


Mounting

wall recessed|ceiling recessed

Wiring

On the power supply unit with terminal board included.

Complies with EN60598-1 and pertinent regulations

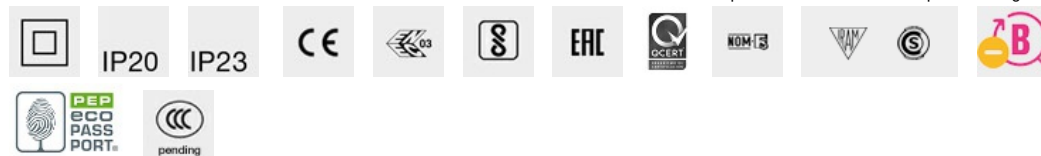

Technical data

Im system:	1162	Colour temperature [K]:	2700
W system:	17.7	MacAdam Step:	2
Im source:	1400	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	15	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	65.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	58°	Control:	DALI-2
CRI (minimum):	90		


Polar

	CIE nL 0.83 100-100-100-100-83 UGR 15.7-15.7 DIN A.61 UTE 0.83A+0.00T F*1=996 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<16 L<1500 cd/mq @65°			
	h	d	Em	Emax
	1	1.1	1177	1469
	2	2.2	294	367
	3	3.3	131	163
	4	4.4	74	92

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

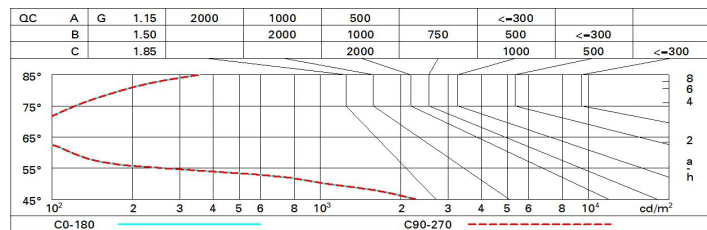

UGR diagram

Corrected UGR values (at 1400 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	10.3	10.9	10.6	17.1	17.4	10.3	10.9	10.6	17.1	17.4
	3H	10.2	10.7	10.5	17.0	17.2	10.2	10.7	10.5	17.0	17.2
	4H	10.1	10.6	10.4	16.9	17.2	10.1	10.6	10.4	16.9	17.2
	6H	10.0	10.5	10.4	16.8	17.1	10.0	10.5	10.4	16.8	17.1
	8H	10.0	10.4	10.3	16.7	17.1	10.0	10.4	10.3	16.7	17.1
	12H	15.9	16.4	16.3	16.7	17.0	15.9	16.4	16.3	16.7	17.0
4H	2H	10.1	10.6	10.4	16.9	17.2	10.1	10.6	10.4	16.9	17.2
	3H	15.9	16.4	16.3	16.7	17.0	15.9	16.4	16.3	16.7	17.0
	4H	15.8	16.2	16.2	16.6	17.0	15.8	16.2	16.2	16.6	17.0
	6H	15.8	16.1	16.2	16.5	16.9	15.8	16.1	16.2	16.5	16.9
	8H	15.7	16.0	16.1	16.4	16.9	15.7	16.0	16.1	16.4	16.9
	12H	15.7	15.9	16.1	16.4	16.8	15.7	15.9	16.1	16.4	16.8
8H	4H	15.7	16.0	16.1	16.4	16.9	15.7	16.0	16.1	16.4	16.9
	6H	15.6	15.9	16.1	16.3	16.8	15.6	15.9	16.1	16.3	16.8
	8H	15.6	15.8	16.0	16.2	16.7	15.6	15.8	16.0	16.2	16.7
	12H	15.5	15.7	16.0	16.2	16.7	15.5	15.7	16.0	16.2	16.7
12H	4H	15.7	15.9	16.1	16.4	16.8	15.7	15.9	16.1	16.4	16.8
	6H	15.6	15.8	16.0	16.2	16.7	15.6	15.8	16.0	16.2	16.7
	8H	15.5	15.7	16.0	16.2	16.7	15.5	15.7	16.0	16.2	16.7
Variations with the observer position at spacing:											
S =		1.0H					0.5 / -24.9				
		1.5H					9.4 / -25.6				
		2.0H					11.4 / -25.8				