


QB77 QC04 14W 2750lm 4000K ES 1 / 3

Polar

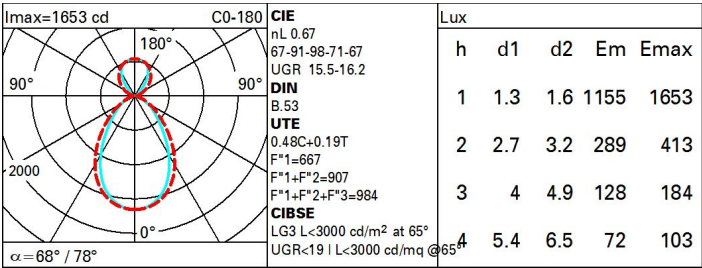

Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	44	38	35	32	36	33	31	26	54
1.0	48	43	39	36	40	37	34	29	61
1.5	54	49	46	44	46	43	40	34	72
2.0	57	53	51	48	49	47	44	38	79
2.5	59	56	54	52	52	50	46	40	83
3.0	60	58	56	54	53	52	48	41	86
4.0	62	60	58	57	55	54	50	43	90
5.0	62	61	60	58	56	55	51	44	92

Curva límite de luminancia

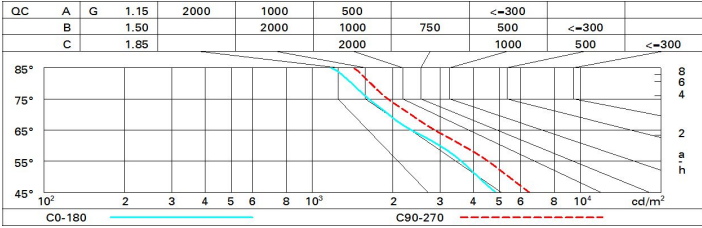


Diagrama UGR

Corrected UGR values (at 5550 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	14.0	14.7	14.7	15.4	16.2	15.2	15.9	15.9	16.6	17.4	
	3H	14.6	15.2	15.3	15.9	16.8	15.3	16.0	16.0	16.7	17.5	
	4H	14.7	15.3	15.5	16.1	16.9	15.3	15.9	16.1	16.6	17.5	
	6H	14.9	15.4	15.6	16.1	17.0	15.3	15.8	16.0	16.5	17.4	
	8H	14.9	15.4	15.6	16.2	17.0	15.2	15.8	16.0	16.5	17.4	
	12H	14.9	15.4	15.7	16.1	17.0	15.2	15.7	15.9	16.4	17.3	
4H	2H	14.3	14.9	15.1	15.6	16.5	15.9	16.5	16.6	17.2	18.1	
	3H	15.0	15.5	15.8	16.3	17.2	16.2	16.7	16.9	17.4	18.3	
	4H	15.3	15.7	16.0	16.5	17.4	16.2	16.7	17.0	17.4	18.4	
	6H	15.5	15.8	16.3	16.6	17.6	16.2	16.6	17.1	17.4	18.4	
	8H	15.5	15.9	16.3	16.7	17.6	16.2	16.6	17.0	17.4	18.4	
	12H	15.5	15.8	16.4	16.7	17.7	16.2	16.5	17.0	17.3	18.3	
8H	4H	15.3	15.7	16.1	16.5	17.4	16.5	16.8	17.3	17.6	18.6	
	6H	15.6	15.9	16.5	16.7	17.7	16.6	16.8	17.4	17.7	18.7	
	8H	15.7	16.0	16.6	16.8	17.8	16.6	16.8	17.4	17.7	18.7	
	12H	15.8	16.0	16.7	16.9	17.9	16.6	16.8	17.4	17.7	18.7	
12H	4H	15.3	15.6	16.1	16.4	17.4	16.5	16.8	17.3	17.6	18.6	
	6H	15.6	15.8	16.5	16.7	17.7	16.6	16.8	17.5	17.7	18.7	
	8H	15.7	15.9	16.6	16.8	17.9	16.7	16.9	17.5	17.7	18.8	
Variations with the observer position at spacing:												
S =		1.0H	0.5 / -0.5		0.3 / -0.5							
		1.5H	0.6 / -1.2		0.8 / -1.2							
		2.0H	1.2 / -1.9		1.8 / -1.8							