

## Easy


Design iGuzzini

iGuzzini

Last information update: April 2025

### Product configuration: QG20

QG20: Ø 105 mm - warm white - DALI



### Product code

QG20: Ø 105 mm - warm white - DALI

### Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3000K). Wall-washer light emission.

### Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

### Colour

White / Aluminium (39)

### Weight (Kg)

0.36

### Mounting

ceiling surface

### Wiring

product complete with DALI components


Complies with EN60598-1 and pertinent regulations



IP20

IP54


On the visible part of  
the product once installed



### Technical data

Im system:	1444	Colour temperature [K]:	3000
W system:	13.2	MacAdam Step:	2
Im source:	1900	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	11	Lamp code:	LED
Luminous efficiency (Im/W, real value):	109.4	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	76	Control:	DALI-2
CRI (minimum):	80		

Polar

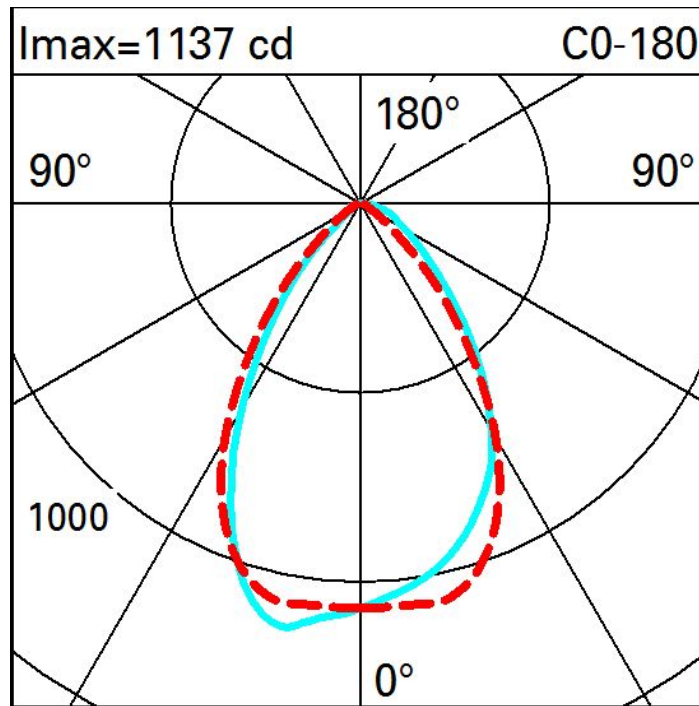

Illuminances

Lux											
						Wall distance = 1m					
3											
	0.8	2	5	16	47	78	47	16	5	2	0.8
2	1	3	7	25	70	110	70	25	7	3	1
	2	5	13	37	78	104	78	37	13	5	2
1	3	7	17	37	61	73	61	37	17	7	3
	4	9	18	31	41	46	41	31	18	9	4
0											
	m	-2	-1	0	1	2	3				