

Last information update: July 2025

**Product configuration: QL82**

QL82: Ø597mm - neutral white - Microprismatic - DALI



**Product code**

QL82: Ø597mm - neutral white - Microprismatic - DALI

**Technical description**

Round luminaire for ceiling-mounted installation with option of recessed or pendant installation via an accessory to be ordered separately. Direct emission designed to use neutral white 4000K LED lamps. The optical assembly consists of an extruded painted aluminium frame, a satin finish methacrylate diffuser screen for UGR<19 3000cd/m2 light emission and a sheet metal rear closing base. The driver is housed in the upper part of the product.

**Installation**

Ceiling-mounted. Recessed or pendant-mounted using an accessory to be ordered separately.

**Colour**

White (01) | Black (04)

**Weight (Kg)**

7.5

**Mounting**

wall surface|ceiling surface

**Wiring**

Product complete with electronic components. The electrical cables used are made of a "halogen free" material. (This means that the cables do not contain any halogen materials that in the event of a fire do not emit toxic or corrosive gases and only a small quantity of opaque fumes).

**Notes**

TPb rated


Complies with EN60598-1 and pertinent regulations



**Technical data**

Im system:	3255	Colour temperature [K]:	4000
W system:	26.5	MacAdam Step:	3
Im source:	4650	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
W source:	23	Lamp code:	LED
Luminous efficiency (Im/W, real value):	122.8	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	70	Control:	DALI-2
CRI (minimum):	80		


**Polar**

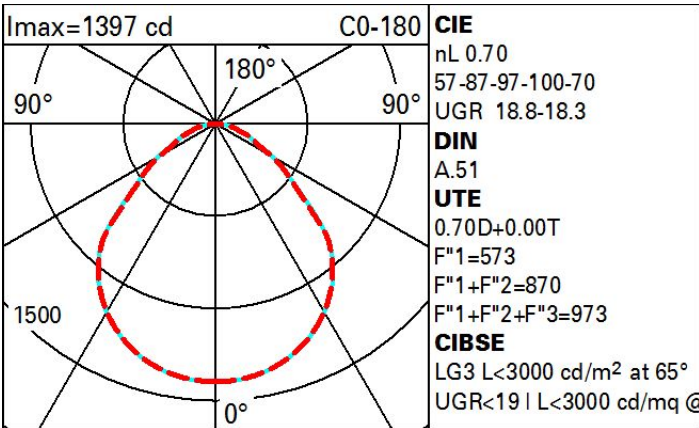

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	49	42	38	34	42	37	37	33	47
1.0	54	48	43	40	47	43	42	38	54
1.5	61	56	52	49	54	51	50	46	66
2.0	64	61	57	55	59	56	56	52	74
2.5	67	63	61	58	62	60	59	55	79
3.0	68	66	63	61	64	62	61	58	83
4.0	70	68	66	64	66	65	64	61	87
5.0	71	69	68	66	68	66	65	62	89

# Luminance curve limit

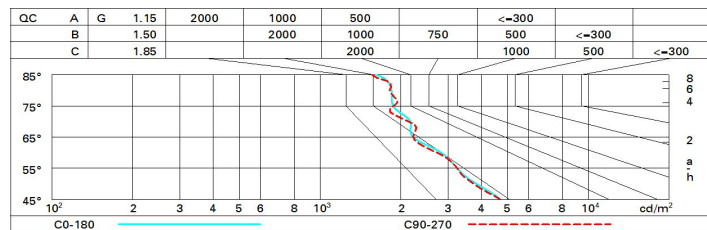

# UGR diagram

Corrected UGR values (at 4050 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x        y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	16.4	17.4	16.7	17.7	18.0	16.3	17.4	16.6	17.6	17.9
	3H	17.2	18.1	17.5	18.4	18.7	16.6	17.5	16.9	17.8	18.1
	4H	17.5	18.4	17.9	18.7	19.1	16.7	17.5	17.0	17.9	18.2
	6H	17.9	18.7	18.2	19.0	19.3	16.7	17.5	17.0	17.8	18.2
	8H	18.0	18.8	18.4	19.1	19.5	16.7	17.4	17.0	17.8	18.1
	12H	18.1	18.8	18.4	19.2	19.5	16.6	17.4	17.0	17.7	18.1
4H	2H	16.7	17.6	17.1	17.9	18.2	17.5	18.3	17.8	18.6	19.0
	3H	17.7	18.5	18.1	18.8	19.2	17.9	18.7	18.3	19.0	19.4
	4H	18.2	18.9	18.6	19.3	19.7	18.1	18.8	18.5	19.2	19.6
	6H	18.7	19.2	19.1	19.6	20.1	18.3	18.9	18.7	19.3	19.7
	8H	18.8	19.4	19.3	19.8	20.2	18.3	18.9	18.8	19.3	19.7
	12H	18.9	19.4	19.4	19.9	20.3	18.3	18.8	18.8	19.2	19.7
8H	4H	18.4	18.9	18.8	19.3	19.8	18.7	19.3	19.2	19.7	20.1
	6H	19.0	19.4	19.4	19.9	20.3	19.0	19.5	19.5	19.9	20.4
	8H	19.2	19.6	19.7	20.1	20.6	19.1	19.5	19.6	20.0	20.5
	12H	19.4	19.7	19.9	20.2	20.7	19.2	19.6	19.7	20.0	20.6
12H	4H	18.4	18.9	18.8	19.3	19.8	18.8	19.3	19.3	19.8	20.2
	6H	19.0	19.4	19.5	19.9	20.4	19.2	19.6	19.7	20.0	20.5
	8H	19.3	19.6	19.8	20.1	20.6	19.3	19.7	19.8	20.1	20.7
Variations with the observer position at spacing:											
S =	1.0H	0.3 / -0.3					0.3 / -0.3				
	1.5H	0.5 / -0.9					0.6 / -0.9				
	2.0H	1.1 / -1.2					1.1 / -1.1				