

Last information update: November 2024

#### Product configuration: QY09.12+QX51.01

QY09.12: LED module - L 1192 - 78° - up (40%) and down (60%) emission - low output - neutral white - integrated DALI dimmable control gear - Aluminium

QX51.01: IN60 MMO - Up and Down Module - Minimal - L= 1192 - 4000K - CRI 80 - White

#### Product code

QY09.12: LED module - L 1192 - 78° - up (40%) and down (60%) emission - low output - neutral white - integrated DALI dimmable control gear - Aluminium

#### Technical description

LED module set up for housing in IN60 MMO up (40%) and down (60%) emission system profiles. The raster is made of metallised thermoplastic. The luminaire generates a down emission with controlled luminance  $L \leq 3000 \text{ cd/m}^2 - \alpha > 65^\circ$ , for use in environments with video monitors in compliance with EN 12464-1. The version is Low Output. Supplied with DALI dimmable electronic control gear. Neutral white LED (4000K), CRI80.

#### Installation

Module insertion on compartments with a mechanical easy-push system (steel snap-on springs).

#### Colour

Indeterminate (00)

#### Weight (Kg)

0.93

#### Wiring

Quick coupling input terminal block connection. LED module complete with integrated DALI control gear. The electrical cables used are made of a "halogen free" material.

Complies with EN60598-1 and pertinent regulations



#### Product code

QX51.01: IN60 MMO - Up and Down Module - Minimal - L= 1192 - 4000K - CRI 80 - White

#### Technical description

The L profile=1192 mm is made of extruded aluminium. This is the Minimal version for up (4000K and CRI80) and down emission. The product can be used for pendant applications; in both a stand alone version and when the product is used in continuous lines.

#### Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately. The modules are to be completed with end caps and rasters with LEDs to be ordered separately.

#### Colour

White (01)



#### Weight (Kg)

2

#### Mounting

ceiling recessed|wall surface|ceiling pendant


Complies with EN60598-1 and pertinent regulations



#### Technical data

Im system:	4641	CRI (minimum):	80
W system:	27	Colour temperature [K]:	4000
Im source:	5950	MacAdam Step:	3
W source:	27	Lamp code:	LED
Luminous efficiency (Im/W, real value):	171.9	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	1645	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	78	Control:	DALI-2

Polar

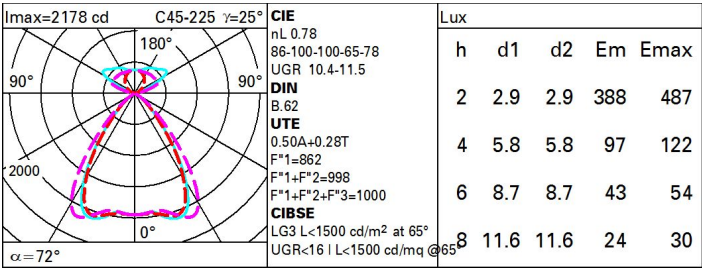

# UGR diagram

Corrected UGR values (at 5950 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
		viewed crosswise					viewed endwise					
2H	2H	11.3	11.8	12.0	12.5	13.4	12.4	12.9	13.1	13.6	14.5	
	3H	11.1	11.5	11.9	12.3	13.2	12.2	12.6	13.0	13.4	14.3	
	4H	11.0	11.4	11.8	12.2	13.1	12.1	12.5	12.9	13.3	14.2	
	6H	10.8	11.2	11.6	12.0	13.0	11.9	12.3	12.7	13.1	14.1	
	8H	10.8	11.2	11.6	12.0	12.9	11.9	12.3	12.7	13.1	14.0	
	12H	10.7	11.1	11.6	11.9	12.9	11.8	12.2	12.7	13.0	14.0	
4H	2H	11.0	11.4	11.8	12.2	13.1	12.0	12.5	12.8	13.2	14.2	
	3H	10.8	11.1	11.6	11.9	12.9	11.8	12.2	12.7	13.0	14.0	
	4H	10.6	10.9	11.5	11.8	12.8	11.7	12.0	12.5	12.8	13.9	
	6H	10.5	10.8	11.4	11.6	12.7	11.6	11.8	12.4	12.7	13.7	
	8H	10.4	10.7	11.3	11.5	12.6	11.5	11.7	12.4	12.6	13.7	
	12H	10.3	10.6	11.2	11.5	12.5	11.4	11.6	12.3	12.5	13.6	
8H	4H	10.4	10.7	11.3	11.5	12.6	11.5	11.7	12.4	12.6	13.7	
	6H	10.3	10.5	11.2	11.4	12.5	11.4	11.6	12.3	12.5	13.6	
	8H	10.2	10.4	11.1	11.3	12.4	11.3	11.5	12.2	12.4	13.5	
	12H	10.1	10.3	11.1	11.2	12.4	11.2	11.4	12.1	12.3	13.4	
12H	4H	10.3	10.6	11.2	11.5	12.5	11.4	11.6	12.3	12.5	13.6	
	6H	10.2	10.4	11.1	11.3	12.4	11.3	11.5	12.2	12.4	13.5	
	8H	10.1	10.3	11.1	11.2	12.4	11.2	11.4	12.1	12.3	13.4	
Variations with the observer position at spacing:												
S =		1.0H	3.9 / -11.5					3.1 / -9.1				
		1.5H	5.5 / -26.8					5.4 / -27.3				
		2.0H	7.4 / -26.7					7.4 / -27.7				