



Design iGuzzini iGuzzini


Product configuration: QY45.01
QY45.01: Recessed with 10 cells - Flood optic - White



Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	63	60	58	56	59	57	57	55	78
1.0	66	63	61	59	62	60	60	58	83
1.5	69	67	65	64	66	65	64	62	89
2.0	71	70	69	67	69	68	67	65	93
2.5	73	71	71	70	71	70	69	67	96
3.0	74	73	72	71	72	71	70	68	98
4.0	74	74	73	73	73	72	71	70	99
5.0	75	74	74	74	73	73	72	70	100

Luminance curve limit

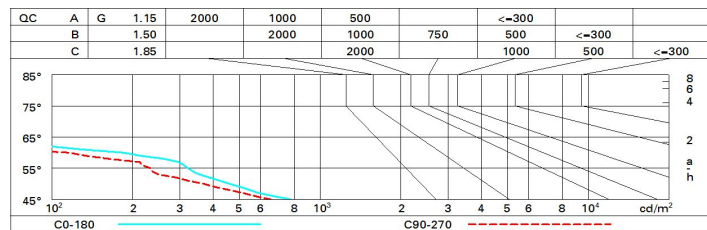

UGR diagram

Corrected UGR values (at 2900 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	0.0	0.4	0.2	0.0	0.9	0.2	0.0	0.4	0.0	7.1
	3H	5.8	0.2	0.1	0.5	0.8	0.0	0.4	0.3	0.7	7.0
	4H	5.7	0.1	0.1	0.4	0.7	0.0	0.4	0.3	0.6	6.9
	6H	5.7	0.0	0.0	0.3	0.7	5.9	0.2	0.2	0.6	6.9
	8H	5.6	0.0	0.0	0.3	0.6	5.8	0.2	0.2	0.5	6.8
	12H	5.6	5.9	0.0	0.3	0.6	5.8	0.1	0.2	0.5	6.8
4H	2H	5.8	0.1	0.1	0.4	0.7	0.0	0.3	0.3	0.6	6.9
	3H	5.6	5.9	0.0	0.3	0.6	5.8	0.1	0.2	0.5	6.8
	4H	5.5	5.8	5.9	0.2	0.6	5.7	0.0	0.1	0.4	6.8
	6H	5.4	5.7	5.8	0.1	0.5	5.6	5.9	0.0	0.3	6.7
	8H	5.4	5.6	5.8	0.0	0.5	5.6	5.8	0.0	0.2	6.7
	12H	5.3	5.5	5.8	0.0	0.4	5.5	5.7	0.0	0.2	6.6
8H	4H	5.4	5.6	5.8	0.0	0.5	5.6	5.8	0.0	0.2	6.7
	6H	5.3	5.5	5.7	5.9	0.4	5.5	5.7	5.9	0.1	6.6
	8H	5.2	5.4	5.7	5.9	0.3	5.4	5.6	5.9	0.1	6.6
	12H	5.2	5.3	5.7	5.8	0.3	5.4	5.5	5.9	0.0	6.5
12H	4H	5.3	5.5	5.8	0.0	0.4	5.5	5.7	0.0	0.2	6.6
	6H	5.2	5.4	5.7	5.9	0.3	5.4	5.6	5.9	0.1	6.6
	8H	5.2	5.3	5.7	5.8	0.3	5.4	5.5	5.9	0.0	6.5
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -17.0					6.6 / -18.7				
	1.5H	9.5 / -23.9					9.5 / -27.2				
	2.0H	11.5 / -33.7					11.5 / -32.9				