


Last information update: December 2024

**Product configuration: R485.83**

R485.83: Ø 212 - 3000K - CRI80 - UGR&lt;19 - INVERTER - Transparent/Black

**Product code**

R485.83: Ø 212 - 3000K - CRI80 - UGR&lt;19 - INVERTER - Transparent/Black

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Prismatic thermoplastic reflector complete with flux enhancer. Optic available with two finishes, clear white or clear black. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3000K) and microfilm that is able to guarantee a light beam of UGR<19 L<3000 cd/m<sup>2</sup>, which is ideal for environments with video terminals. Luminaire complete with inverter for safety light.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 25 mm.

**Colour**

Black Transparent (83)

**Weight (Kg)**

1.68

**Mounting**

ceiling surface

**Wiring**

Product complete with INVERTER for safety light.

Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of  
the product once installed**Technical data**

lm system:	2451	Colour temperature [K]:	3000
W system:	24.1	MacAdam Step:	2
lm source:	2850	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	17	Lamp code:	LED
Luminous efficiency (lm/W, real value):	101.7	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	86	Control:	On/off
CRI (minimum):	80		


**Polar**

Imax=1699 cd		CIE nL 0.86 80-98-100-100-86 UGR 18.2-18.1 DIN A.61 UTE 0.86B+0.00T F*1=804 F*1+F*2=983 F*1+F*2+F*3=997 CIBSE LG3 L<1500 cd/m <sup>2</sup> at 65° UGR<19   L<1500 cd/mq @ 65°	Lux			
90°	180°		h	d	Em	Emax
			1	1.5	1225	1699
			2	3.1	306	425
			3	4.6	136	189
			4	6.2	77	106
α = 75°						

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	64	60	57	63	59	59	55	64
1.0	75	69	65	62	68	65	64	60	70
1.5	81	77	74	71	76	73	72	69	80
2.0	84	81	79	77	80	78	77	74	86
2.5	86	84	82	80	83	81	80	77	89
3.0	88	86	84	83	84	83	82	79	92
4.0	89	88	86	85	86	85	84	81	94
5.0	90	89	88	87	87	86	85	82	95

# Luminance curve limit

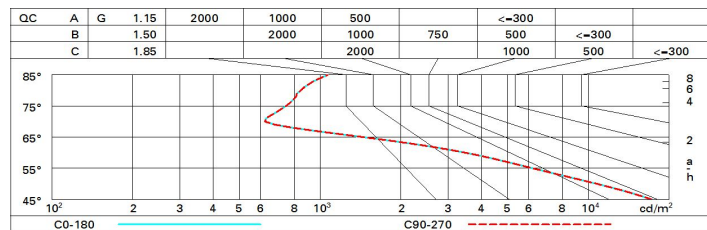

# UGR diagram

Corrected UGR values (at 2850 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	18.6	19.4	18.9	19.6	19.9	18.6	19.4	18.9	19.6	19.9
	3H	18.5	19.2	18.8	19.5	19.7	18.5	19.2	18.9	19.5	19.8
	4H	18.4	19.1	18.7	19.4	19.7	18.5	19.1	18.8	19.4	19.7
	6H	18.3	18.9	18.7	19.3	19.6	18.4	19.0	18.7	19.3	19.6
	8H	18.3	18.9	18.7	19.2	19.6	18.3	18.9	18.7	19.3	19.6
	12H	18.3	18.8	18.7	19.2	19.5	18.3	18.9	18.7	19.2	19.6
4H	2H	18.5	19.1	18.8	19.4	19.7	18.4	19.1	18.7	19.4	19.7
	3H	18.3	18.9	18.7	19.2	19.6	18.3	18.9	18.7	19.2	19.6
	4H	18.3	18.8	18.7	19.1	19.5	18.3	18.8	18.7	19.1	19.5
	6H	18.2	18.6	18.6	19.0	19.4	18.2	18.6	18.6	19.0	19.4
	8H	18.2	18.6	18.6	19.0	19.4	18.1	18.5	18.6	18.9	19.4
	12H	18.1	18.5	18.6	18.9	19.4	18.1	18.5	18.6	18.9	19.3
8H	4H	18.1	18.5	18.6	18.9	19.4	18.2	18.6	18.6	19.0	19.4
	6H	18.1	18.4	18.6	18.9	19.3	18.1	18.4	18.6	18.9	19.3
	8H	18.1	18.3	18.5	18.8	19.3	18.1	18.3	18.5	18.8	19.3
	12H	18.0	18.3	18.5	18.8	19.3	18.0	18.3	18.5	18.7	19.3
12H	4H	18.1	18.5	18.6	18.9	19.3	18.1	18.5	18.6	18.9	19.4
	6H	18.0	18.3	18.5	18.8	19.3	18.1	18.3	18.6	18.8	19.3
	8H	18.0	18.3	18.5	18.7	19.3	18.0	18.3	18.5	18.8	19.3
Variations with the observer position at spacing:											
S =	1.0H	1.8 / -4.0					1.8 / -4.0				
	1.5H	3.6 / -7.9					3.6 / -7.9				
	2.0H	5.5 / -10.9					5.5 / -10.9				