

Last information update: March 2025

Product configuration: R709.47

R709.47: Ø59 Tech - DALI - Medium Beam - Black / White

**Product code**

R709.47: Ø59 Tech - DALI - Medium Beam - Black / White

Technical description

Cylindrical lighting body for ceiling or pendant-mounted applications. Fixed optic lighting system with a high definition reflector made of metallised thermoplastic. The LEDs are set back to minimize glare and guarantee a high level of visual comfort. Structural cylinder made of painted extruded aluminium with an inner ring made of thermoplastic available in different painted or metallised finishes. Glass cover Using specific accessory kits, ceiling or pendant-mounted installations can be made with minimum intervention and simplified by a practical bayonet coupling system. DALI dimmable driver integrated in the luminaire.

Installation

Ceiling or pendant-mounted - use the appropriate assembly kits available with a separate item code.

Colour

Black / White (47)

Weight (Kg)

0.47

Mounting

ceiling surface|ceiling pendant

Wiring

The lighting body is fitted with an internal terminal board for connectinf it to the power line or pendant cable.

Notes

A wide range of decorative accessories and diffusers is available.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	952	Colour temperature [K]:	4000
W system:	12.3	MacAdam Step:	2
Im source:	1220	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	11	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	77.4	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	78	Number of optical assemblies:	1
Beam angle [°]:	24°	Control:	DALI-2
CRI (minimum):	90		


Polar

Imax=5108 cd		CIE		Lux			
90°	180°	90°	0°	h	d	Em	E _{max}
		nL 0.78 100-100-100-100-78 UGR <10-10 DIN A.61 UTE 0.78A+0.00T F*1=999 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<10 L<1500 cd/mq @ 65°		2	0.8	1051	1277
				4	1.7	263	319
				6	2.5	117	142
				8	3.4	66	80

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	64	62	66	64	64	61	78
1.0	74	70	68	66	70	67	67	65	83
1.5	77	75	73	71	74	72	71	69	89
2.0	80	78	76	75	77	75	75	73	93
2.5	81	80	79	78	79	78	77	75	96
3.0	82	81	80	80	80	79	78	76	98
4.0	83	82	82	81	81	81	79	78	99
5.0	83	83	83	82	82	81	80	78	100

Luminance curve limit

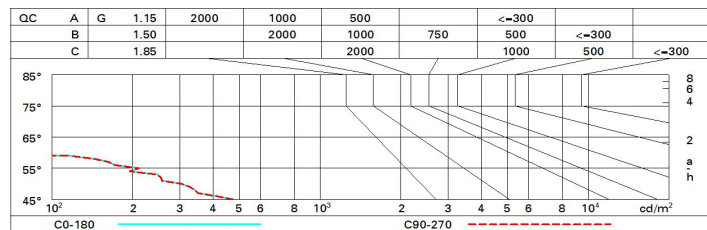

UGR diagram

Corrected UGR values (at 1220 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	-8.9	-6.7	-8.5	-6.4	-6.0	-8.9	-6.7	-8.5	-6.4	-6.0
	3H	-9.0	-7.4	-8.6	-7.1	-6.7	-9.0	-7.4	-8.6	-7.1	-6.7
	4H	-9.1	-7.8	-8.7	-7.4	-7.1	-9.0	-7.8	-8.7	-7.4	-7.1
	6H	-9.1	-8.2	-8.7	-7.8	-7.5	-9.1	-8.1	-8.7	-7.8	-7.5
	8H	-9.1	-8.2	-8.7	-7.9	-7.5	-9.1	-8.2	-8.7	-7.8	-7.5
	12H	-9.2	-8.2	-8.8	-7.9	-7.5	-9.2	-8.2	-8.8	-7.9	-7.5
4H	2H	-9.0	-7.8	-8.7	-7.4	-7.1	-9.1	-7.8	-8.7	-7.4	-7.1
	3H	-9.2	-8.2	-8.8	-7.9	-7.5	-9.2	-8.2	-8.8	-7.9	-7.5
	4H	-9.3	-8.3	-8.9	-7.9	-7.5	-9.3	-8.3	-8.9	-7.9	-7.5
	6H	-9.7	-8.0	-9.2	-7.5	-7.0	-9.7	-8.0	-9.2	-7.5	-7.0
	8H	-9.8	-7.9	-9.3	-7.4	-6.9	-9.8	-7.9	-9.3	-7.4	-6.9
	12H	-9.9	-7.9	-9.4	-7.5	-6.9	-9.9	-7.9	-9.4	-7.5	-6.9
8H	4H	-9.8	-7.9	-9.3	-7.4	-6.9	-9.8	-7.9	-9.3	-7.4	-6.9
	6H	-9.9	-8.1	-9.4	-7.6	-7.1	-9.9	-8.1	-9.4	-7.6	-7.1
	8H	-10.0	-8.4	-9.4	-7.9	-7.3	-10.0	-8.4	-9.4	-7.9	-7.3
	12H	-9.8	-8.8	-9.3	-8.3	-7.7	-9.8	-8.8	-9.3	-8.3	-7.7
12H	4H	-9.9	-7.9	-9.4	-7.5	-6.9	-9.9	-7.9	-9.4	-7.5	-6.9
	6H	-10.0	-8.4	-9.4	-7.9	-7.3	-10.0	-8.4	-9.4	-7.9	-7.3
	8H	-9.8	-8.8	-9.3	-8.3	-7.7	-9.8	-8.8	-9.3	-8.3	-7.7
Variations with the observer position at spacing:											
S =	1.0H	5.6 / -9.7					5.6 / -9.7				
	1.5H	8.4 / -25.6					8.4 / -25.6				
	2.0H	10.4 / -29.0					10.4 / -29.0				