

Light Shed 14

Design iGuzzini

iGuzzini

Last information update: January 2025

Product configuration: R997.01

R997.01: L=1584 mm - INVERTER - down emission - White

Product code

R997.01: L=1584 mm - INVERTER - down emission - White

Technical description

Luminaire L = 1584 mm complete with LED lamp in neutral white colour tone 4000K. Body made of extruded painted aluminium and a thermoplastic raster with a white finish or a patented "Opti Diamond" technology, translucent textured thermoplastic raster created with a catadioptric system and no galvanic treatments. Product with high efficiency down emission LED $UGR < 19$ $L < 3000$ cd/mq $\alpha > 65^\circ$ emission, for use in environments with video monitors in compliance with EN 12464-1. The DALI driver is housed in the upper part of the luminaire. Possibility of pendant or surface-mounted installation using kit to be ordered separately as an accessory. The luminaire can be installed individually or in a continuous line. Product complete with INVERTER kit for emergency operation.

Installation

Pendant or surface-mounted installation using a kit to be ordered separately.

Colour

White (01)

Weight (Kg)

5.16

Mounting

ceiling surface

Wiring

Product complete with DALI and INVERTER components for emergency lighting. Possibility of integrating ILS components available as accessories. The electrical cables used are made of a "halogen free" material.

Notes

The accessory kit for pendant installations includes a pair of end caps for individual installations.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2546	Voltage [Vin]:	230
W system:	22.9	Lamp code:	LED
Im source:	3350	Number of lamps for optical assembly:	1
W source:	19	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	111.2	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	10 A / 220 µs
Light Output Ratio (L.O.R.) [%]:	76	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 18 luminaires B16A: 30 luminaires C10A: 31 luminaires C16A: 51 luminaires
CRI (minimum):	90	Minimum dimming %:	1
Colour temperature [K]:	4000	Overvoltage protection:	2kV Common mode & 1kV Differential mode
MacAdam Step:	3	Control:	DALI-2
Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)		

Polar

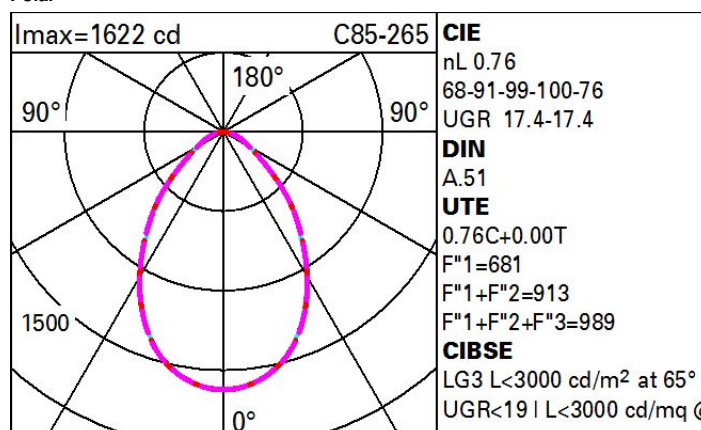

R	77	75	73	71	55	53	33	00	DRR
K0.8	57	51	47	43	50	46	46	42	55
1.0	62	56	52	49	55	51	51	47	62
1.5	68	64	60	57	63	60	59	55	72
2.0	72	69	66	63	67	65	64	60	80
2.5	74	71	69	67	70	68	67	64	84
3.0	76	73	71	70	72	70	69	66	87
4.0	77	76	74	73	74	73	72	69	90
5.0	78	77	76	74	75	74	73	70	92

QC	A	G	1.15	2000	1000	500	<=300	<=300	<=300
B	1.50			2000	1000	750	500	500	
C	1.85				2000	1000	1000	500	<=300

85°
75°
65°
55°
45°

10⁵ 2 3 4 5 6 8 10³ 2 3 4 5 6 8 10⁴

C0-180 C90-270

8 6 4 2 a h

cd/m²

Corrected UGR values (at 3350 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	15.6	16.5	15.9	16.8	17.0	15.7	16.6	16.0	16.8	17.1
	3H	16.4	17.1	16.7	17.4	17.7	15.9	16.7	16.2	17.0	17.3
	4H	16.6	17.4	17.0	17.7	18.0	16.0	16.7	16.3	17.0	17.3
	6H	16.7	17.4	17.1	17.7	18.1	16.0	16.7	16.3	17.0	17.3
	8H	16.7	17.4	17.1	17.7	18.1	16.0	16.6	16.3	17.0	17.3
	12H	16.7	17.3	17.1	17.6	18.0	15.9	16.6	16.3	16.9	17.3
4H	2H	15.9	16.7	16.3	17.0	17.3	16.6	17.4	17.0	17.7	18.0
	3H	16.9	17.5	17.2	17.8	18.2	17.0	17.7	17.4	18.0	18.4
	4H	17.2	17.8	17.7	18.2	18.6	17.2	17.8	17.6	18.1	18.5
	6H	17.4	17.9	17.8	18.3	18.7	17.3	17.8	17.8	18.2	18.7
	8H	17.4	17.8	17.8	18.3	18.7	17.4	17.8	17.8	18.2	18.7
	12H	17.3	17.7	17.8	18.2	18.6	17.3	17.7	17.8	18.2	18.6
8H	4H	17.4	17.8	17.8	18.3	18.7	17.3	17.8	17.8	18.2	18.6
	6H	17.6	18.0	18.1	18.4	18.9	17.5	17.8	18.0	18.3	18.8
	8H	17.6	17.9	18.1	18.4	18.9	17.5	17.8	18.0	18.3	18.8
	12H	17.6	17.8	18.1	18.3	18.8	17.5	17.8	18.0	18.3	18.8
12H	4H	17.4	17.8	17.8	18.2	18.7	17.3	17.7	17.7	18.1	18.6
	6H	17.6	17.9	18.1	18.4	18.9	17.4	17.8	17.9	18.2	18.7
	8H	17.6	17.9	18.1	18.3	18.9	17.5	17.7	18.0	18.2	18.8

Variations with the observer position at spacing:

S =	1.0H	0.4 / -0.7	0.4 / -0.7
	1.5H	1.1 / -1.4	1.1 / -1.5
	2.0H	2.2 / -1.7	2.2 / -1.8