



Last information update: February 2025

Product configuration: EK60

EK60: 2 - cell Recessed luminaire - LED Neutral white medium



Product code

EK60: 2 - cell Recessed luminaire - LED Neutral white medium

Technical description

rectangular miniaturised recessed luminaire with 2 optical elements with LED lamps - fixed optics - medium beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen. Connecting cable supplied. Ballast not included, available with separate code. High efficiency value Neutral White LED (lm/W).

Installation

recessed with steel wire springs for false ceilings from 1 to 20 mm thick - preparation hole 35 x 64

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Grey / Black (74)* | White / burnished chrome (E7)*

Weight (Kg)

0.09

* Colours on request

Mounting

wall recessed|ceiling recessed

Wiring

direct current ballasts to be ordered separately: electronic (MXF9) for max. 7 LEDs; DALI dimmable (BZM4) for max. 20 LEDs (check instruction leaflet for compatible lengths of cables to be used)

Complies with EN60598-1 and pertinent regulations



Technical data

| | | | |
|--|-------|---------------------------------------|---------------------------------|
| lm system: | 512 | CRI (typical): | 82 |
| W system: | 4 | Colour temperature [K]: | 4000 |
| lm source: | 610 | MacAdam Step: | 3 |
| W source: | 4 | Life Time LED 1: | > 50,000h - L90 - B10 (Ta 25°C) |
| Luminous efficiency (lm/W, real value): | 128.1 | Lamp code: | LED |
| lm in emergency mode: | - | Number of lamps for optical assembly: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | ZVEI Code: | LED |
| Light Output Ratio (L.O.R.) [%]: | 84 | Number of optical assemblies: | 1 |
| Beam angle [°]: | 34° | LED current [mA]: | 700 |
| CRI (minimum): | 80 | | |


Polar

| Imax=1522 cd | | CIE nL 0.84 100-100-100-100-84 UGR <10-<10 DIN A.61 UTE 0.84A+0.00T F*1=1000 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<10 L<1500 cd/mq @65° | Lux | | | |
|--------------|------|--|-----|-----|------|------------------|
| 90° | 180° | | h | d | Em | E _{max} |
| | | | 1 | 0.6 | 1150 | 1522 |
| | | | 2 | 1.2 | 288 | 381 |
| | | | 3 | 1.8 | 128 | 169 |
| | | | 4 | 2.4 | 72 | 95 |

Utilisation factors

| | | | | | | | | | |
|------|----|----|----|----|----|----|----|----|-----|
| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
| K0.8 | 76 | 72 | 69 | 67 | 71 | 69 | 69 | 66 | 78 |
| 1.0 | 79 | 76 | 73 | 71 | 75 | 73 | 72 | 70 | 83 |
| 1.5 | 83 | 81 | 78 | 77 | 80 | 78 | 77 | 74 | 89 |
| 2.0 | 86 | 84 | 82 | 81 | 83 | 81 | 80 | 78 | 93 |
| 2.5 | 87 | 86 | 85 | 84 | 85 | 84 | 83 | 80 | 96 |
| 3.0 | 88 | 87 | 86 | 86 | 86 | 85 | 84 | 82 | 98 |
| 4.0 | 89 | 89 | 88 | 88 | 87 | 87 | 85 | 83 | 99 |
| 5.0 | 90 | 89 | 89 | 89 | 88 | 88 | 86 | 84 | 100 |

Luminance curve limit

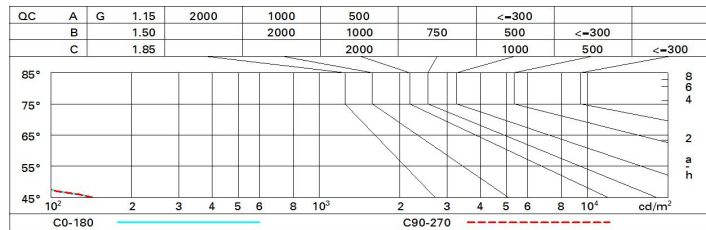

UGR diagram

| Corrected UGR values (at 610 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|------|------------------|------|------|------|------|----------------|------|------|------|------|
| Reflect.: | | viewed crosswise | | | | | viewed endwise | | | | |
| ceiling/cav | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 |
| walls | | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 |
| work pl. | | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 |
| Room dim | | | | | | | | | | | |
| x | y | | | | | | | | | | |
| 2H | 2H | 2.2 | 2.7 | 2.4 | 2.9 | 3.2 | 2.2 | 2.7 | 2.4 | 2.9 | 3.2 |
| | 3H | 2.0 | 2.5 | 2.3 | 2.8 | 3.1 | 2.0 | 2.5 | 2.3 | 2.8 | 3.1 |
| | 4H | 2.0 | 2.4 | 2.3 | 2.7 | 3.0 | 2.0 | 2.4 | 2.3 | 2.7 | 3.0 |
| | 6H | 1.9 | 2.3 | 2.2 | 2.6 | 2.9 | 1.9 | 2.3 | 2.2 | 2.6 | 2.9 |
| | 8H | 1.8 | 2.3 | 2.2 | 2.6 | 2.9 | 1.8 | 2.3 | 2.2 | 2.6 | 2.9 |
| 12H | 1.8 | 2.2 | 2.2 | 2.5 | 2.9 | 1.8 | 2.2 | 2.2 | 2.5 | 2.9 | |
| 4H | 2H | 2.0 | 2.4 | 2.3 | 2.7 | 3.0 | 2.0 | 2.4 | 2.3 | 2.7 | 3.0 |
| | 3H | 1.8 | 2.2 | 2.2 | 2.5 | 2.9 | 1.8 | 2.2 | 2.2 | 2.5 | 2.9 |
| | 4H | 1.7 | 2.1 | 2.1 | 2.4 | 2.8 | 1.7 | 2.1 | 2.1 | 2.4 | 2.8 |
| | 6H | 1.6 | 1.9 | 2.0 | 2.3 | 2.7 | 1.6 | 1.9 | 2.0 | 2.3 | 2.7 |
| | 8H | 1.6 | 1.9 | 2.0 | 2.3 | 2.7 | 1.6 | 1.9 | 2.0 | 2.3 | 2.7 |
| 12H | 1.5 | 1.8 | 2.0 | 2.2 | 2.7 | 1.5 | 1.8 | 2.0 | 2.2 | 2.7 | |
| 8H | 4H | 1.6 | 1.9 | 2.0 | 2.3 | 2.7 | 1.6 | 1.9 | 2.0 | 2.3 | 2.7 |
| | 6H | 1.5 | 1.7 | 2.0 | 2.2 | 2.6 | 1.5 | 1.7 | 2.0 | 2.2 | 2.6 |
| | 8H | 1.4 | 1.6 | 1.9 | 2.1 | 2.6 | 1.4 | 1.6 | 1.9 | 2.1 | 2.6 |
| | 12H | 1.4 | 1.5 | 1.9 | 2.0 | 2.5 | 1.4 | 1.5 | 1.9 | 2.0 | 2.5 |
| 12H | 4H | 1.5 | 1.8 | 2.0 | 2.2 | 2.7 | 1.5 | 1.8 | 2.0 | 2.2 | 2.7 |
| | 6H | 1.4 | 1.6 | 1.9 | 2.1 | 2.6 | 1.4 | 1.6 | 1.9 | 2.1 | 2.6 |
| | 8H | 1.4 | 1.5 | 1.9 | 2.0 | 2.5 | 1.4 | 1.5 | 1.9 | 2.0 | 2.5 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | 1.0H | 6.9 / -28.9 | | | | | 6.9 / -28.9 | | | | |
| | 1.5H | 9.7 / -30.6 | | | | | 9.7 / -30.6 | | | | |
| | 2.0H | 11.7 / -31.1 | | | | | 11.7 / -31.1 | | | | |