
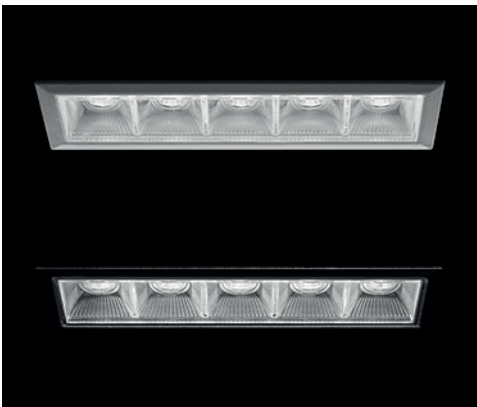
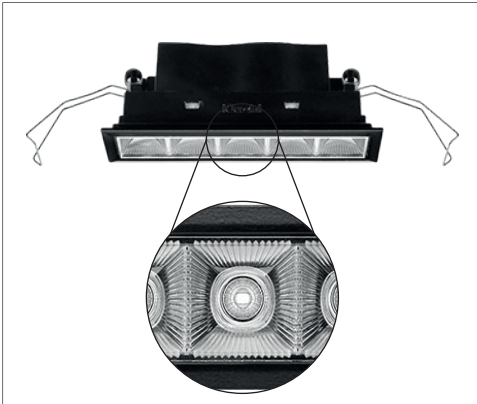


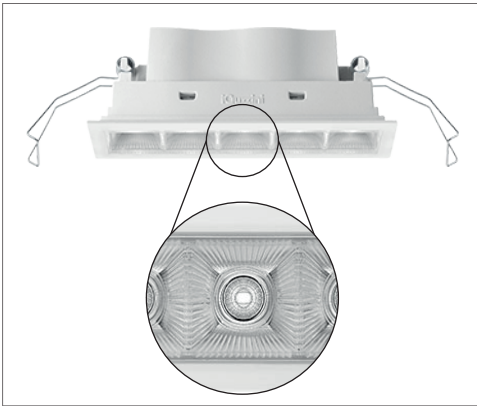

Laser blade is a collection of recessed downlights for architectural applications. Laser Blade optics have evolved through the adoption of Opti Diamond technology, the outcome of a detailed study into materials, engineering and processes that optimise the catadioptric principle, with the result of extraordinary brilliance just like a diamond. Laser blade space is available in 3 aperture size, trim or trimless with generous outputs of up to 2646 lumens and excellent chromatic performance .

Luminaire characteristic:

Power input: 9.8W to 29W (source wattage)
Lumens: 882lm to 2604lm (for 3000K, 92CRI)
Luminaire efficacy: up to 90lm/W

Source:

White LED module (LM-80)
2700K: 92CRI (90CRI min),
3000K: 92CRI (90CRI min),
3500K: 92CRI (90CRI min),
4000K: 92CRI (90CRI min).

Lumen maintenance:

90% of initial lumens at 50 000 hours (L90) (LM-79).

Optics:

Wide flood optic with Opti Diamond technology.

Material:

Body and heat sink: Die-cast aluminum
Reflector and baffle: Thermoplastic
Housing: Galvanized steel

Mounting:

New construction with housing for insulated ceiling,
Chicago plenum and airtight applications.

Electrical:

High efficiency LED driver, rated at 50 000 hours.
See remote LED driver options on page 3.

Finish:

Black or white (RAL9010) body with transparent
baffle (page 2).

Weight:

ILB05: 0.66lbs (0.30kg)
ILB10: 1.32lbs (0.60kg)
ILB15: 1.90lbs (0.86kg)

Warranty:

5 year limited warranty.

Ratings:

IP20, IP23 (from under the ceiling)

Certification:



cULus listed for damp location. Interior use only.

Title 24-JA8-2019 high efficiency luminaire.
Airtight luminaire less than 2 cfm leakage @1.57PSI
per ASTM E283.

To confirm which versions are certified, please
consult the "Appliance Advanced Search" option
at the following adress :
<https://cacertappliances.energy.ca.gov>

Assembled in North America.

ORDERING INFO



Table with 7 columns: MODEL, MOUNTING, INSTALLATION, LED, OPTIC, VOLTAGE, FINISH. It lists various lighting fixture configurations including models like ILB05, ILB10, ILB15, and finishes like TRIM, D8, 83, TRIMLESS, and 24.

1 Airtight luminaire less than 2 cfm leakage @1.57PSI per ASTM E283.
2 92CRI typical - 90CRI minimum.

REMOTE LED DRIVER OPTIONS (TO BE ORDERED SEPARATELY)

PRODUCT CODE (COMPLETE ON THE PREVIOUS PAGE)

Indoor rated drivers

Driver box model	Min-max units		
	ILB05 9.8W*	ILB10 20W*	ILB15 29W*
4443-0700-025-UNV-D2	2	1	
4450-0700-030-UNV-SD10	1-2	1	
4443-0700-035-UNV-D2	3		1
4450-0700-038-UNV-SD10	1-3	1	1
4450-0700-038-UNV-ED10	1-3	1	1

* Wattage requirement for one (1) fixture (remote fixture only).


DRIVER CODE SELECTION

Complete the ordering info to activate the driver code selection menu.

MODEL	CONSTANT CURRENT	WATTAGE	VOLTAGE	DIMMING PROTOCOL
4443 5" x 4" x 3" (127 x 102 x 76mm)	0700 700mA	025 to 038 25W to 038W	120 120V	D2 Lutron Hi Lume® 1% EcoSystem™ (Soft-on, Fade to Black) Max distance: 9m (30ft)** (down to 1%)
4450 8" x 8" x 4" (203 x 203 x 102mm)			UNV 120-277V	ED10 0-10V ELDOLED ECOdrive Max distance: 36m (118ft)** (down to 1%) SD10 0-10V ELDOLED SOLOdrive Max distance: 36m (118ft)** (down to 0.1%)

*Max distance cable calculated for 16AWG cable. Contact customer service for longer remote distance.

WIRING DIAGRAMS

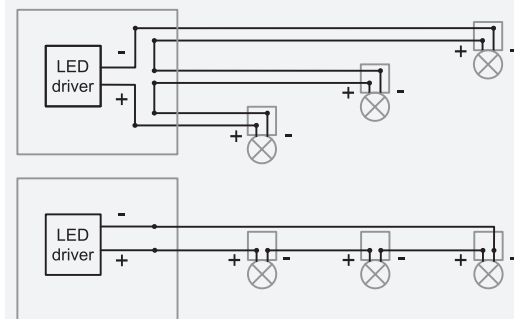Multiple luminaires must be connected in series
(home run or fixture chain)

INSTALLATION


New construction with airtight (AT) housing.

Housing with hanger bars system for new construction installations.
Suitable for insulated ceiling , chicago plenum and airtight applications.
Housing can be shipped separately.

Ceiling thickness:
Trim: 1/8" to 1 1/8" (3mm - 29mm)
Trimless: 3/8" (16mm)

Total weight: 2.65lbs (1.20kg)


Certification: Airtight housing (AT) certified less than 2 cfm leakage
@ 1.57PSI per ASTM E283.

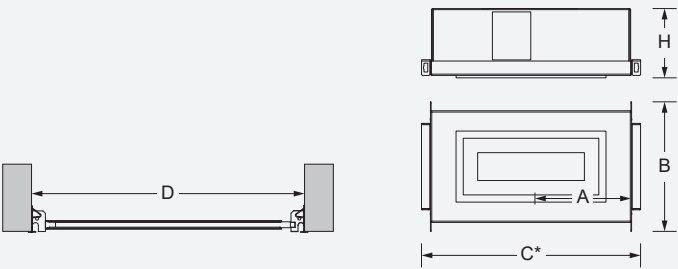


*Provide a minimum of 1 1/8" (46mm) on each side for the hanger bar fixations

Model	Housing	Cut-out dimensions	Cut-out positions (A)	Overall dimensions (BxC)	Hanger bars range (D)	Clearance (H)
ILB05	BI-LB05TR-AT-REM	1½" x 5⅝" (37 x 141mm)	5¼" (133mm)	5⅝" x 11" (150 x 280mm)	14¼" to 26" (362 to 660mm)	3½" (89mm)
	BI-LB05TL-AT-REM	1⅝" x 5⅝" (35 x 141mm)				
ILB10	BI-LB10TR-AT-REM	1½" x 10⅜" (37 x 274mm)	8⅝" (223mm)	5⅝" x 18⅝" (144 x 430mm)		
	BI-LB10TL-AT-REM	1⅝" x 10⅜" (35 x 271mm)				
ILB15	BI-LB15TR-AT-REM	1½" x 16" (37 x 406mm)	13⅝" (332mm)	9½" x 25" (242 x 635mm)		
	BI-LB15TL-AT-REM	1⅝" x 15⅞" (37 x 404mm)				


TRIM MODELS DIMENSIONS

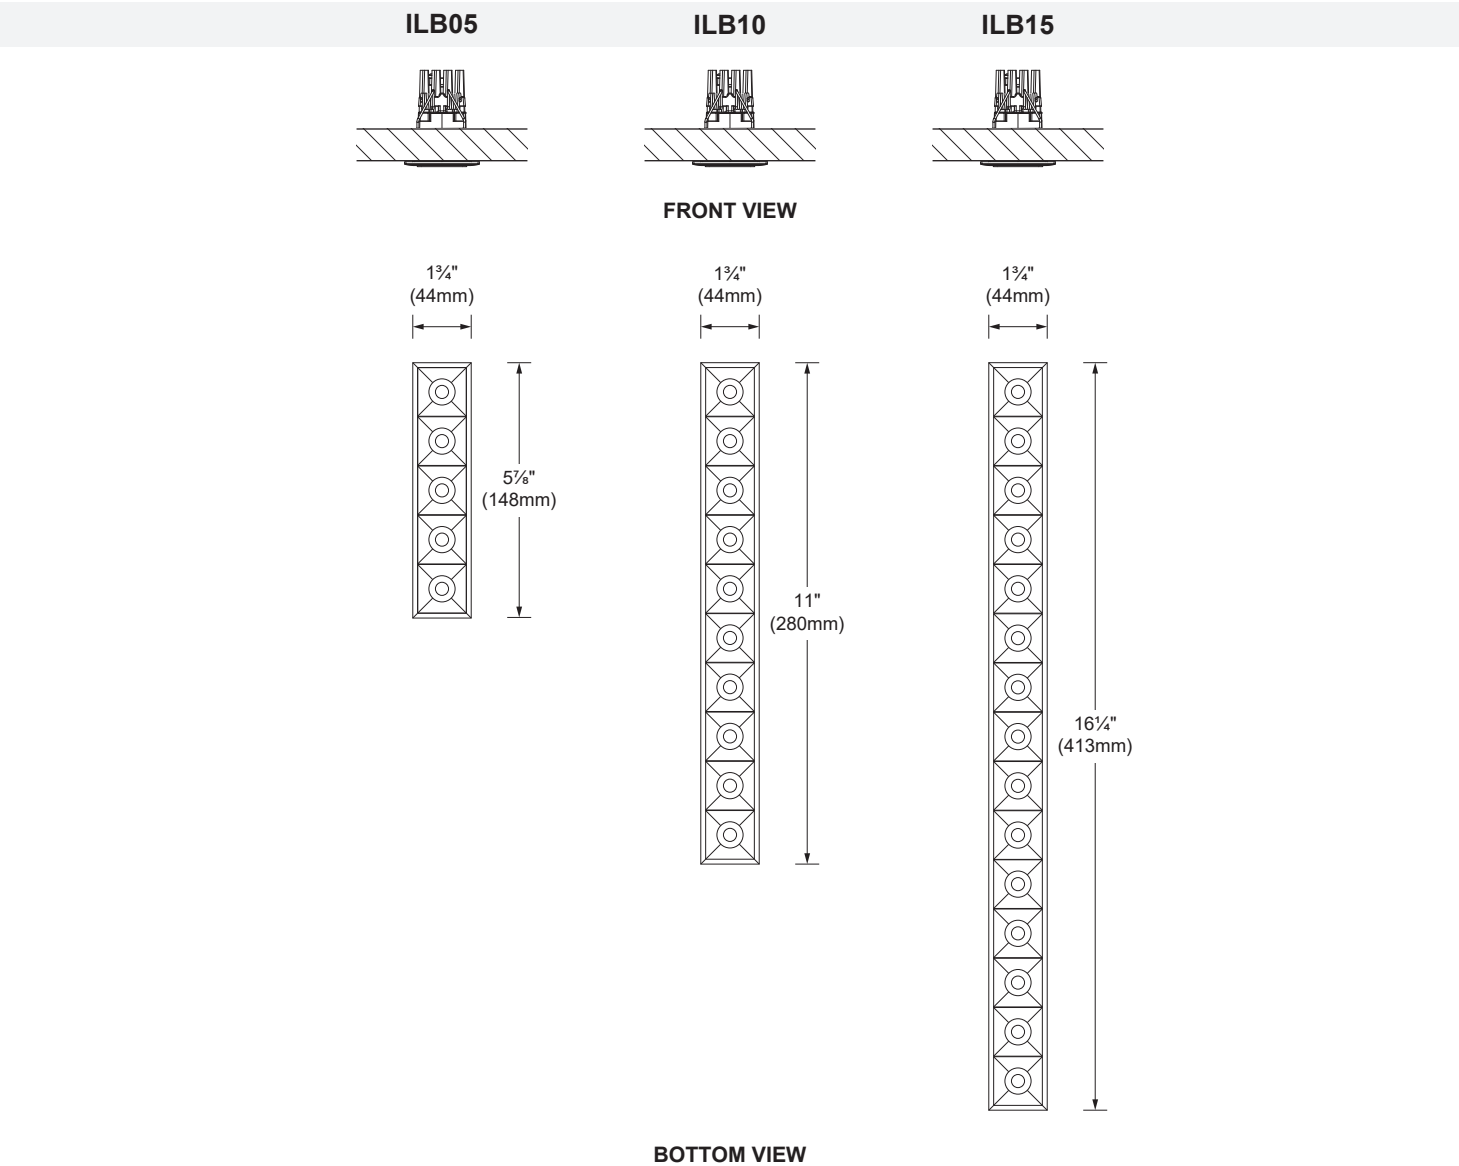

TRIMLESS MODELS DIMENSIONS

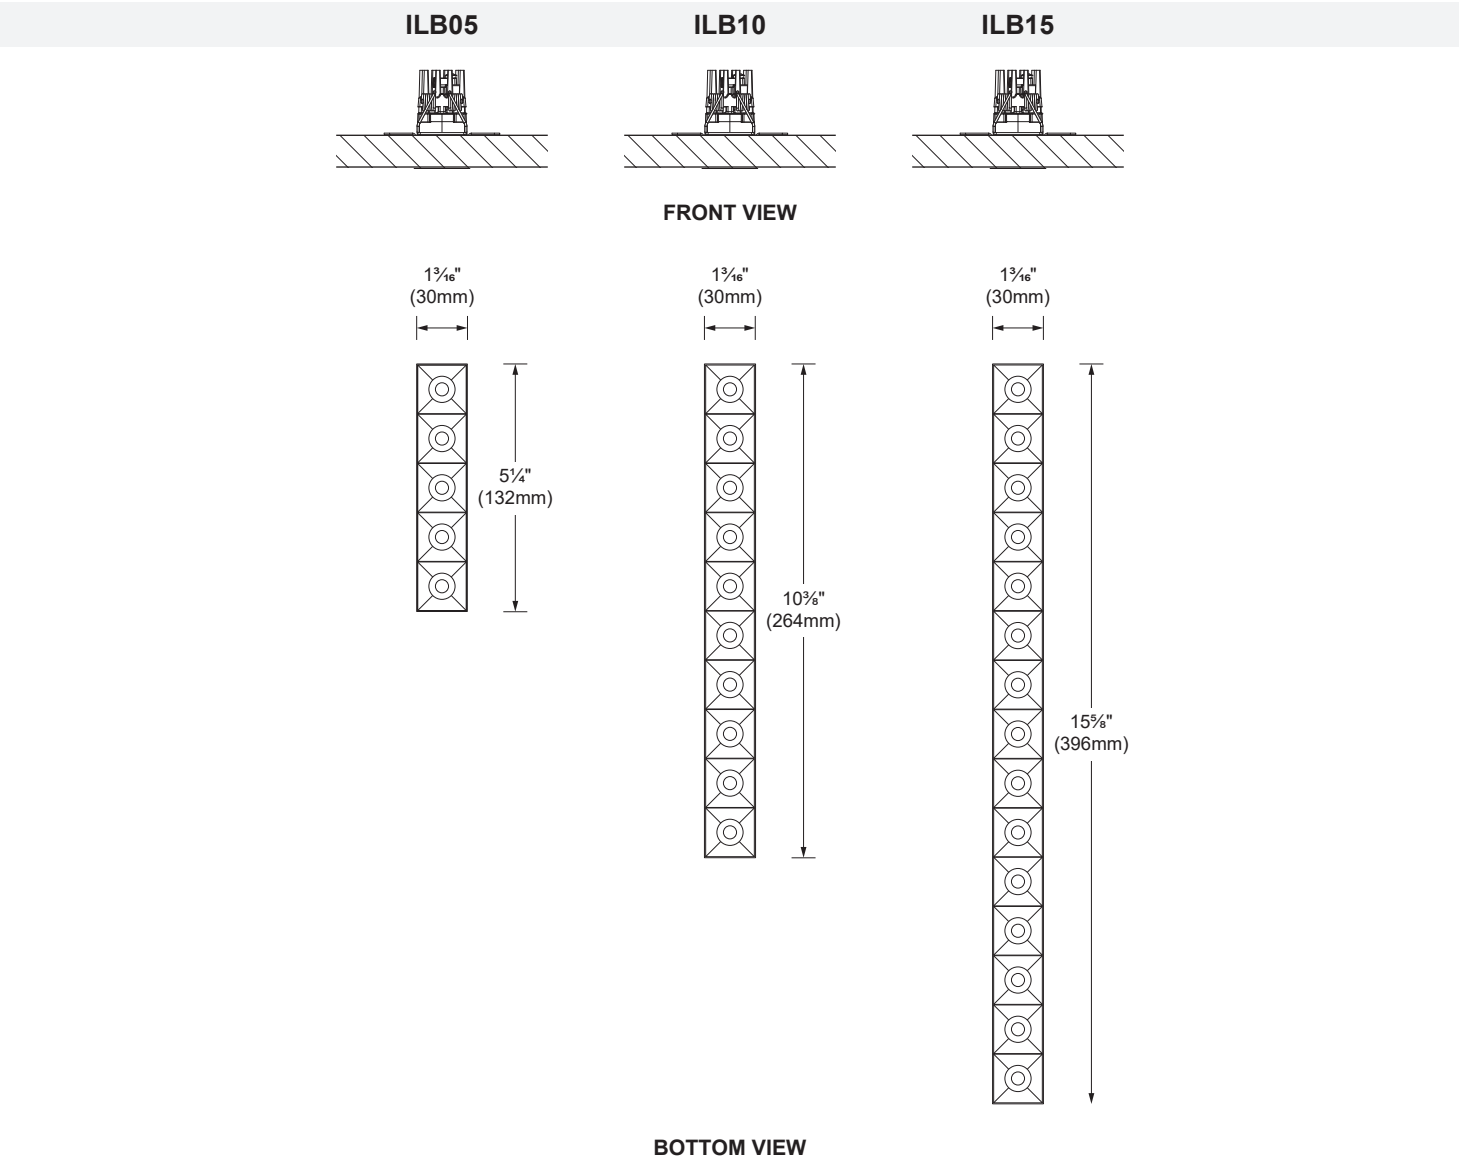

Visual comfort UGR < 16.

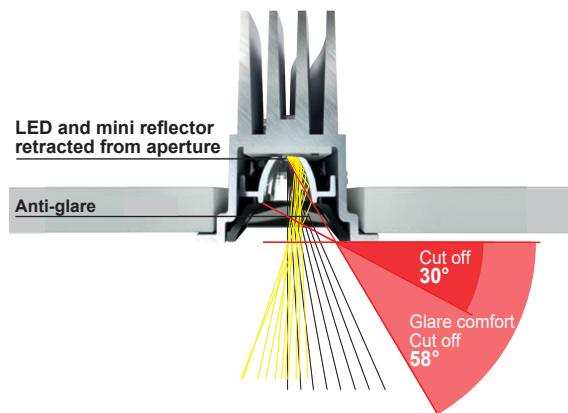

LED COLOR FIDELITY DATA

CRI	CCT	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	Rf	Rg	Melanopic ratio
92	2700K	92	96	98	91	91	95	91	79	55	89	92	86	93	98	88	91	100	0.488
	3000K	93	97	98	92	93	95	92	82	60	91	92	82	94	99	90	92	99	0.571
	3500K	92	95	96	92	91	93	93	83	59	87	92	79	93	97	89	92	99	0.635
	4000K	93	94	94	93	92	91	94	86	64	85	93	78	93	96	90	91	100	0.715

PHOTOMETRIC DATA


ILB05



CCT (K)	CRI	LOAD (W)*	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODEL
3000K	92	9.8W	Wide flood 47°	882	90	1 572	ILB05-030-WF

*For products that uses a remote led driver, total system wattage will varies according to the efficacy of the remote led driver selected. For this reason, the load and efficacy values given in the table above refers to the led source only and does not include the led driver consumption.

Wide flood 47° (3000K, 92CRI)



Center beam fc	Beam width ft
2ft	392
4ft	97.9
6ft	43.5
8ft	24.5
10ft	15.7
12ft	10.9

CCT options	2700K	3000K	3500K	4000K
CRI options	92CRI	92CRI	92CRI	92CRI
Multiplier	0.95	1	1.05	1.1

PHOTOMETRIC DATA


ILB10



CCT (K)	CRI	LOAD (W)*	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODEL
3000K	92	20W	Wide flood 47°	1 722	86	3 069	ILB10-030-WF

*For products that uses a remote led driver, total system wattage will varies according to the efficacy of the remote led driver selected. For this reason, the load and efficacy values given in the table above refers to the led source only and does not include the led driver consumption.

Wide flood 47° (3000K, 92CRI)



	Center beam fc	Beam width ft
2ft	765	1.7
4ft	191	3.5
6ft	85.0	5.2
8ft	47.8	6.9
10ft	30.6	8.6
12ft	21.2	10.4


ILB15



CCT (K)	CRI	LOAD (W)*	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODEL
3000K	92	29W	Wide flood 47°	2 604	89	4 641	ILB15-030-WF

*For products that uses a remote led driver, total system wattage will varies according to the efficacy of the remote led driver selected. For this reason, the load and efficacy values given in the table above refers to the led source only and does not include the led driver consumption.

Wide flood 47° (3000K, 92CRI)



	Center beam fc	Beam width ft
2ft	1 157	1.7
4ft	289	3.5
6ft	129	5.2
8ft	72.3	6.9
10ft	46.3	8.6
12ft	32.1	10.4

CCT options	2700K	3000K	3500K	4000K
CRI options	92CRI	92CRI	92CRI	92CRI
Multiplier	0.95	1	1.05	1.10