

### Front Light

Design iGuzzini iGuzzini

Design iGuzzini iGuzzini

Last information update: May 2024

**Product configuration: MN53**

MN53: Small body Spotlight - LED Warm White - Electronic ballast - Medium Optic



## Product code

MN53: Small body Spotlight - LED Warm White - Electronic ballast - Medium Optic **Attention! Code no longer in production**

## Technical description

Adjustable indoor spotlight with adapter for installation on mains electrified track, for high output LED lamp with monochrome emission in a warm white colour. Medium optic. Luminaire made of die-cast aluminium. Twin adjustability allows 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical locks for aiming, for rotation on horizontal plane and around vertical axis. Equipped with electronic ballast.

## Installation

Electrified track or base, to be ordered as an accessory

Colour	Weight (Kg)
--------	-------------

White (01)   Black (04)   Grey / Black (74)	1.18
---	------

## Weight (Kg)

1.18

## Mounting

three circuit track

## Wiring

Electronic components housed in the luminaire.


Complies with EN60598-1 and pertinent regulations




## Technical data

Im system:	2459	CRI (minimum):	90
W system:	30.2	Colour temperature [K]:	3000
Im source:	3200	MacAdam Step:	2
W source:	28	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	81.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	77	Number of optical assemblies:	1
Beam angle [°]:	30°		

## Polar

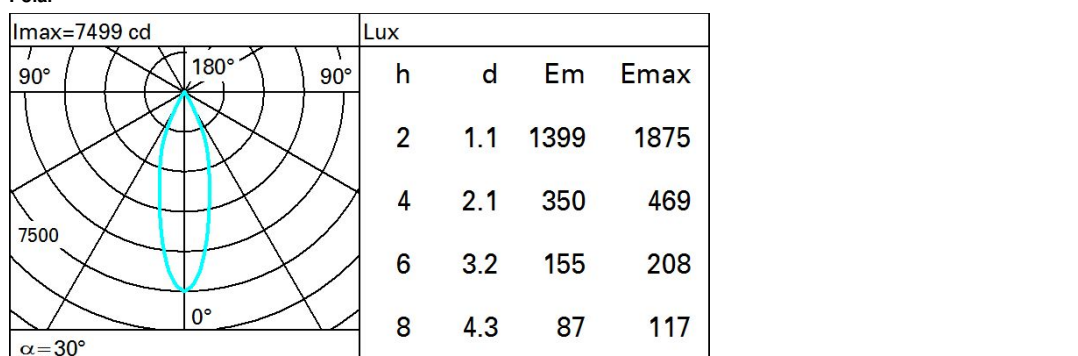

### Isolux

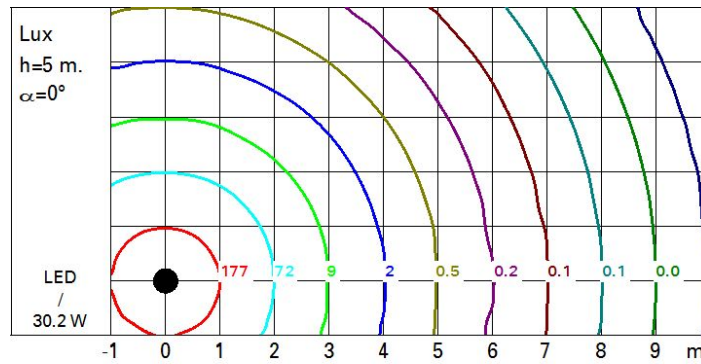

### UGR diagram

Corrected UGR values (at 3200 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	10.7	11.2	10.9	11.5	11.7	10.7	11.2	10.9	11.5	11.7
	3H	10.7	11.2	11.0	11.5	11.7	10.6	11.1	10.9	11.4	11.7
	4H	10.7	11.2	11.0	11.5	11.8	10.6	11.0	10.9	11.3	11.6
	6H	10.7	11.1	11.0	11.4	11.8	10.5	10.9	10.8	11.3	11.6
	8H	10.7	11.1	11.0	11.4	11.8	10.5	10.9	10.8	11.2	11.6
	12H	10.7	11.1	11.0	11.4	11.7	10.4	10.8	10.8	11.2	11.5
4H	2H	10.6	11.0	10.9	11.3	11.6	10.7	11.2	11.0	11.5	11.8
	3H	10.6	11.0	11.0	11.4	11.7	10.7	11.1	11.1	11.4	11.8
	4H	10.7	11.0	11.0	11.4	11.8	10.7	11.0	11.0	11.4	11.8
	6H	10.7	11.0	11.1	11.4	11.8	10.6	10.9	11.0	11.3	11.7
	8H	10.7	11.0	11.1	11.4	11.8	10.6	10.9	11.0	11.3	11.7
	12H	10.7	10.9	11.1	11.4	11.8	10.5	10.8	11.0	11.2	11.7
8H	4H	10.6	10.9	11.0	11.3	11.7	10.7	11.0	11.1	11.4	11.8
	6H	10.6	10.9	11.1	11.3	11.8	10.7	10.9	11.1	11.4	11.8
	8H	10.7	10.9	11.2	11.3	11.8	10.7	10.9	11.2	11.3	11.8
	12H	10.7	10.9	11.2	11.3	11.9	10.6	10.8	11.1	11.3	11.8
12H	4H	10.5	10.8	11.0	11.2	11.7	10.7	10.9	11.1	11.4	11.8
	6H	10.6	10.8	11.1	11.3	11.8	10.7	10.9	11.2	11.3	11.8
	8H	10.6	10.8	11.1	11.3	11.8	10.7	10.9	11.2	11.3	11.9
Variations with the observer position at spacing:											
S =		1.0H	4.2 / -3.7				4.2 / -3.7				
		1.5H	6.8 / -4.6				6.8 / -4.6				
		2.0H	8.7 / -5.1				8.7 / -5.1				