

Last information update: May 2024

**Product configuration: P050**

P050: spotlight - warm white 42° optic

**Product code**P050: spotlight - warm white 42° optic **Attention! Code no longer in production****Technical description**

Adjustable spotlight with adapter for installation on a mains voltage track. Die-cast aluminium optical assembly and brackets, the back of the product is slightly rounded and made of a thermoplastic material. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with electronic ballast. Luminaire complete with C.O.B. technology LED unit in warm white colour 3000K CRI90. Option of installing a flat accessory that can be either an elliptical distribution refractor, a soft lens filter or a louver.

**Installation**

on an electrified track or special base

**Colour**

White (01) | Black (04) | White / Chrome (E4)

**Weight (Kg)**

1.4


**Mounting**

three circuit track

**Wiring**

product complete with electronic components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2477	CRI:	90
W system:	30.2	Colour temperature [K]:	3000
lm source:	3100	MacAdam Step:	2
W source:	27	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	82.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	80	Number of optical assemblies:	1
Beam angle [°]:	42°		


**Polar**

	<b>CIE</b>				<b>Lux</b>			
	nL 0.80				h	d	Em	Emax
	99-100-100-100-80				2	1.5	1059	1306
	UGR <10-<10				4	3.1	265	327
	<b>DIN</b> A.61 <b>UTE</b> 0.80A+0.00T F*1=991 F*1+F*2=998 F*1+F*2+F*3=999 <b>CIBSE</b> LG3 L<1500 cd/m² at 65°				6	4.6	118	145
$\alpha = 42^\circ$					8	6.1	66	82

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	63	67	65	65	62	78
1.0	75	72	69	67	71	69	68	66	82
1.5	79	76	74	73	75	74	73	70	88
2.0	81	79	78	77	78	77	76	74	93
2.5	83	81	80	79	80	79	78	76	95
3.0	84	83	82	81	82	81	80	78	97
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	84	84	84	83	82	80	100

# Luminance curve limit

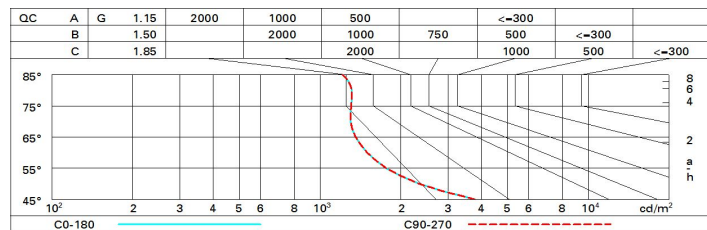

# UGR diagram

Corrected UGR values (at 3100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	8.8	9.4	9.1	9.6	9.9	8.8	9.4	9.1	9.6	9.9
	3H	8.8	9.3	9.1	9.6	9.8	8.7	9.2	9.0	9.5	9.8
	4H	8.8	9.3	9.1	9.6	9.9	8.7	9.1	9.0	9.4	9.7
	6H	8.8	9.2	9.1	9.5	9.9	8.6	9.0	8.9	9.4	9.7
	8H	8.8	9.2	9.1	9.5	9.9	8.6	9.0	8.9	9.3	9.7
	12H	8.8	9.2	9.1	9.5	9.9	8.5	8.9	8.9	9.3	9.6
4H	2H	8.7	9.1	9.0	9.4	9.7	8.8	9.3	9.1	9.6	9.9
	3H	8.7	9.1	9.0	9.4	9.8	8.7	9.1	9.1	9.5	9.8
	4H	8.7	9.0	9.1	9.4	9.8	8.7	9.0	9.1	9.4	9.8
	6H	8.7	9.0	9.1	9.4	9.8	8.6	9.0	9.1	9.4	9.8
	8H	8.7	9.0	9.2	9.4	9.9	8.6	8.9	9.0	9.3	9.7
	12H	8.7	9.0	9.2	9.4	9.9	8.6	8.8	9.0	9.3	9.7
8H	4H	8.6	8.9	9.0	9.3	9.7	8.7	9.0	9.2	9.4	9.9
	6H	8.7	8.9	9.2	9.4	9.8	8.7	9.0	9.2	9.4	9.9
	8H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
	12H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
12H	4H	8.6	8.8	9.0	9.3	9.7	8.7	9.0	9.2	9.4	9.9
	6H	8.7	8.9	9.1	9.3	9.8	8.7	8.9	9.2	9.4	9.9
	8H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
Variations with the observer position at spacing:											
S =	1.0H	5.3 / -4.9					5.3 / -4.9				
	1.5H	8.0 / -5.3					8.0 / -5.3				
	2.0H	10.0 / -5.5					10.0 / -5.5				