


Last information update: May 2024

Product configuration: MU56+LED

MU56: extractable, adjustable, recessed LED luminaire - electronic control gear included

**Product code**MU56: extractable, adjustable, recessed LED luminaire - electronic control gear included **Attention! Code no longer in production****Technical description**

Extractable, adjustable, recessed luminaire for warm white LED lamp with high color rendering index. Passive heat dispersion system. Die-cast aluminium main body and frame; stainless steel rotation hinge. Rotation ring with safety cover in a high resistance thermoplastic material. Body adjusted with a manual manoeuvre device: internal 40° - external 65° - rotation on 355° axis. Reflector with high efficiency super-pure aluminium optic - wideflood beam angle. Die-cast aluminium lamp body closure ring. Tempered transparent glass screen. Electronic control gear supplied and connected to the luminaire.

Installation

recessed using steel springs in false ceilings with thicknesses starting at 1 mm; preparation hole Ø 195 mm

Colour

White (01)

Weight (Kg)

1.7


Mounting

ceiling recessed


Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations

**Technical data**


lm system:	1942.3	Beam angle [°]:	40°
W system:	32	CRI:	90
lm source:	2400	Colour temperature [K]:	3000
W source:	32	MacAdam Step:	3
Luminous efficiency (lm/W, real value):	60.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1

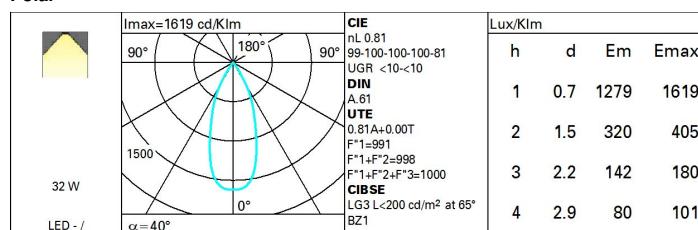Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	69	66	64	68	66	66	63	78
1.0	76	73	70	68	72	70	69	67	82
1.5	80	77	75	74	76	75	74	71	88
2.0	82	81	79	78	79	78	77	75	93
2.5	84	83	81	80	81	80	79	77	95
3.0	85	84	83	82	83	82	81	79	98
4.0	86	85	85	84	84	83	82	80	99
5.0	86	86	86	85	85	84	83	81	100

Luminance curve limit

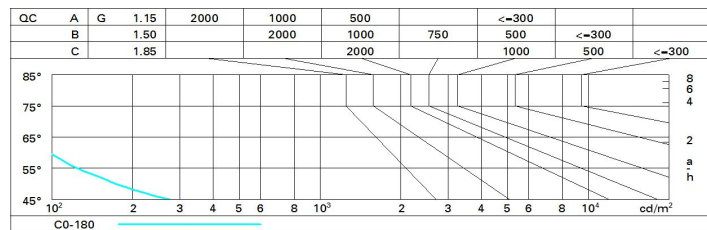

UGR diagram

Photometric curve code: MU530000.X96											
Unorrected UGR values (at 1000 lm bare lamp luminous flux)											
Reflect.:											
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed					viewed				
x y		crosswise					endwise				
2H	2H	3.2	3.7	3.4	3.9	4.1	3.1	3.7	3.4	3.9	4.1
	3H	3.0	3.5	3.3	3.8	4.1	3.0	3.5	3.3	3.8	4.0
	4H	3.0	3.4	3.3	3.7	4.0	2.9	3.4	3.3	3.7	4.0
	6H	2.9	3.3	3.2	3.6	3.9	2.9	3.3	3.2	3.6	3.9
	8H	2.9	3.2	3.2	3.6	3.9	2.8	3.2	3.2	3.6	3.9
	12H	2.8	3.2	3.2	3.5	3.9	2.8	3.2	3.2	3.5	3.9
4H	2H	3.0	3.4	3.3	3.7	4.0	3.0	3.4	3.3	3.7	4.0
	3H	2.8	3.2	3.2	3.5	3.9	2.8	3.2	3.2	3.5	3.9
	4H	2.7	3.1	3.1	3.4	3.8	2.7	3.1	3.1	3.4	3.8
	6H	2.6	2.9	3.1	3.3	3.8	2.6	2.9	3.1	3.3	3.7
	8H	2.6	2.9	3.0	3.3	3.7	2.6	2.9	3.0	3.3	3.7
	12H	2.5	2.8	3.0	3.2	3.7	2.5	2.8	3.0	3.2	3.7
8H	4H	2.6	2.9	3.0	3.3	3.7	2.6	2.9	3.0	3.3	3.7
	6H	2.5	2.7	3.0	3.2	3.6	2.5	2.7	3.0	3.2	3.6
	8H	2.4	2.6	2.9	3.1	3.6	2.4	2.6	2.9	3.1	3.6
	12H	2.4	2.6	2.9	3.0	3.6	2.4	2.6	2.9	3.0	3.6
12H	4H	2.5	2.8	3.0	3.2	3.7	2.5	2.8	3.0	3.2	3.7
	6H	2.4	2.6	2.9	3.1	3.6	2.4	2.6	2.9	3.1	3.6
	8H	2.4	2.6	2.9	3.0	3.6	2.4	2.6	2.9	3.0	3.6
Variations with the observer position at spacing:											
S =	1.0H	6.6 / -14.4					6.6 / -14.4				
	1.5H	9.4 / -15.6					9.4 / -15.6				
	2.0H	11.4 / -16.8					11.4 / -16.8				