


Last information update: October 2024

Product configuration: MU91

MU91: 2 - cell Recessed luminaire - LED - Warm white medium



Product code

MU91: 2 - cell Recessed luminaire - LED - Warm white medium

Technical description

rectangular miniaturised recessed luminaire with 2 optical elements with LED lamps - fixed optics - medium beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen. Connecting cable supplied. Ballast not included, available with separate code. Warm white LED.

Installation

recessed with steel wire springs for false ceilings from 1 to 20 mm thick - preparation hole 35 x 64

Colour

White (01) | Black / Black (43) | Black / White (47)



Mounting

wall recessed|ceiling recessed

Wiring

direct current ballasts to be ordered separately: electronic (MXF9) for max. 7 LEDs; 0-10V dimmable (Y360) for max. 18 LEDs; DALI dimmable (BZM4) for max. 20 LEDs (check instruction leaflet for compatible lengths of cables to be used)

Complies with EN60598-1 and pertinent regulations




On the visible part of the product once installed

Technical data

Im system:	340	CRI (minimum):	90
W system:	4.1	CRI (typical):	92
Im source:	400	Colour temperature [K]:	3000
W source:	4.1	MacAdam Step:	3
Luminous efficiency (Im/W, real value):	82.9	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	85	Number of optical assemblies:	1
Beam angle [°]:	32°	LED current [mA]:	700

Polar

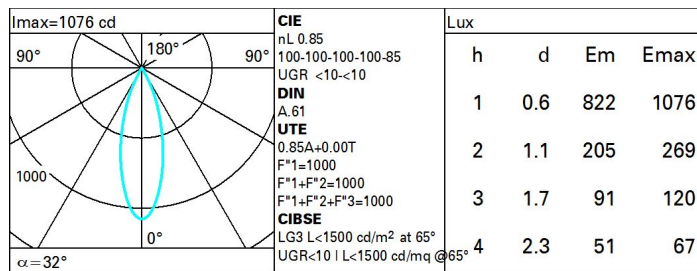

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	77	73	70	68	72	70	69	67	78
1.0	80	77	74	72	76	74	73	71	83
1.5	84	81	79	78	80	79	78	75	89
2.0	87	85	83	82	84	82	81	79	93
2.5	88	87	86	85	86	85	84	81	96
3.0	89	88	88	87	87	86	85	83	98
4.0	90	90	89	89	88	88	87	84	99
5.0	91	90	90	90	89	89	87	85	100

UGR diagram

Corrected UGR values (at 400 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	-3.2	-2.6	-2.9	-2.4	-2.2	-3.2	-2.6	-2.9	-2.4	-2.2
	3H	-3.3	-2.8	-3.0	-2.6	-2.3	-3.3	-2.8	-3.0	-2.6	-2.3
	4H	-3.4	-2.9	-3.0	-2.6	-2.3	-3.4	-2.9	-3.0	-2.6	-2.3
	6H	-3.4	-3.0	-3.1	-2.7	-2.4	-3.4	-3.0	-3.1	-2.7	-2.4
	8H	-3.5	-3.1	-3.1	-2.8	-2.4	-3.5	-3.1	-3.1	-2.8	-2.4
	12H	-3.5	-3.1	-3.2	-2.8	-2.5	-3.5	-3.1	-3.2	-2.8	-2.5
4H	2H	-3.4	-2.9	-3.0	-2.6	-2.3	-3.4	-2.9	-3.0	-2.6	-2.3
	3H	-3.5	-3.1	-3.2	-2.8	-2.5	-3.5	-3.1	-3.2	-2.8	-2.5
	4H	-3.6	-3.3	-3.2	-2.9	-2.5	-3.6	-3.3	-3.2	-2.9	-2.5
	6H	-3.7	-3.4	-3.3	-3.0	-2.6	-3.7	-3.4	-3.3	-3.0	-2.6
	8H	-3.7	-3.5	-3.3	-3.1	-2.6	-3.7	-3.5	-3.3	-3.1	-2.6
	12H	-3.8	-3.6	-3.3	-3.1	-2.7	-3.8	-3.6	-3.3	-3.1	-2.7
8H	4H	-3.7	-3.5	-3.3	-3.1	-2.6	-3.7	-3.5	-3.3	-3.1	-2.6
	6H	-3.8	-3.6	-3.4	-3.2	-2.7	-3.8	-3.6	-3.4	-3.2	-2.7
	8H	-3.9	-3.7	-3.4	-3.2	-2.7	-3.9	-3.7	-3.4	-3.2	-2.7
	12H	-4.0	-3.8	-3.5	-3.3	-2.8	-4.0	-3.8	-3.5	-3.3	-2.8
12H	4H	-3.8	-3.6	-3.3	-3.1	-2.7	-3.8	-3.6	-3.3	-3.1	-2.7
	6H	-3.9	-3.7	-3.4	-3.2	-2.7	-3.9	-3.7	-3.4	-3.2	-2.7
	8H	-4.0	-3.8	-3.5	-3.3	-2.8	-4.0	-3.8	-3.5	-3.3	-2.8
Variations with the observer position at spacing:											
S =	1.0H	0.9 / -25.5					0.9 / -25.5				
	1.5H	9.7 / -26.0					9.7 / -26.0				
	2.0H	11.7 / -26.8					11.7 / -26.8				