


Last information update: May 2024

**Product configuration: MR18**

MR18: Large body spotlight - warm white - electronic ballast - wide flood optic

**Product code**MR18: Large body spotlight - warm white - electronic ballast - wide flood optic **Attention! Code no longer in production****Technical description**

Spotlight made of die-cast aluminium and thermoplastic material. The luminaire can be rotated by 340° about the vertical axis and tilted by +/- 100° in relation to the horizontal plane. Hi-precision beam aiming is guaranteed by screw-operated mechanical locks, graduated scales and friction controls. The spotlight is equipped with a die-cast aluminium ballast unit for ceiling mounting. Luminaire for high output LED lamp with monochrome emission in a warm white colour tone (3000K). Electronic ballast. Equipped with an accessory holding ring designed to contain a flat accessory. Another external component can also be applied, selected from directional flaps and an asymmetric screen. All external accessories rotate 360° about the spotlight longitudinal axis.

**Installation**

Ceiling-mounted.

**Colour**

White (01) | Grey (15)

**Weight (Kg)**

2.25


**Mounting**

wall arm|wall surface|ceiling surface

**Wiring**

Electronic components housed in the luminaire.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	3384	Colour temperature [K]:	3000
W system:	37.5	MacAdam Step:	2
Im source:	4400	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	33	Lamp code:	LED
Luminous efficiency (Im/W, real value):	90.2	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	77	Power factor:	See installation instructions
Beam angle [°]:	44°	Inrush current:	18 A / 250 µs
CRI:	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode


**Polar**

Imax=6731 cd	CIE nL 0.77 99-100-100-100-77 UGR <10-<10 DIN A.61 UTE 0.77A+0.00T F*1=988 F*1+F*2=999 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<10   L<1500 cd/mq @65°	Lux
90°		h d Em Emax
180°		2 1.6 1370 1683
90°		4 3.2 342 421
7500		6 4.8 152 187
0°		8 6.5 86 105
α = 44°		

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	69	65	63	61	65	63	62	60	78
1.0	72	69	67	65	68	66	66	63	82
1.5	76	73	71	70	72	71	70	68	88
2.0	78	76	75	74	75	74	73	71	93
2.5	80	78	77	76	77	76	75	73	95
3.0	81	80	79	78	78	78	77	75	97
4.0	82	81	80	80	80	79	78	76	99
5.0	82	82	81	81	80	80	79	77	100

# Luminance curve limit

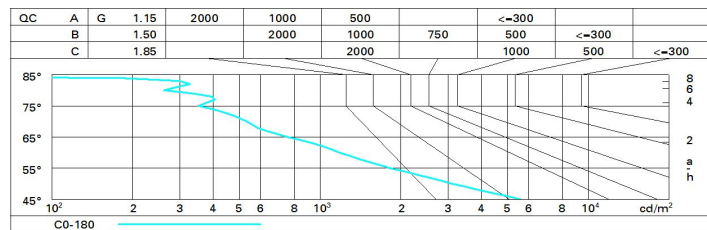

# UGR diagram

Corrected UGR values (at 4400 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x        y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
viewed crosswise						viewed endwise					
2H	2H	9.9	10.5	10.2	10.7	10.9	9.9	10.5	10.2	10.7	10.9
	3H	9.8	10.3	10.1	10.6	10.8	9.8	10.3	10.1	10.6	10.8
	4H	9.7	10.2	10.0	10.5	10.8	9.7	10.2	10.0	10.5	10.8
	6H	9.6	10.1	10.0	10.4	10.7	9.6	10.1	10.0	10.4	10.7
	8H	9.6	10.0	10.0	10.4	10.7	9.6	10.0	9.9	10.3	10.7
	12H	9.6	10.0	9.9	10.3	10.7	9.6	10.0	9.9	10.3	10.7
4H	2H	9.7	10.2	10.0	10.5	10.8	9.7	10.2	10.0	10.5	10.8
	3H	9.6	10.0	9.9	10.3	10.7	9.6	10.0	10.0	10.3	10.7
	4H	9.5	9.9	9.9	10.2	10.6	9.5	9.9	9.9	10.2	10.6
	6H	9.4	9.7	9.8	10.1	10.6	9.4	9.7	9.8	10.1	10.5
	8H	9.4	9.7	9.8	10.1	10.5	9.4	9.7	9.8	10.1	10.5
	12H	9.3	9.6	9.8	10.0	10.5	9.3	9.6	9.8	10.0	10.5
8H	4H	9.4	9.7	9.8	10.1	10.5	9.4	9.7	9.8	10.1	10.5
	6H	9.3	9.5	9.8	10.0	10.4	9.3	9.5	9.8	10.0	10.4
	8H	9.2	9.4	9.7	9.9	10.4	9.2	9.4	9.7	9.9	10.4
	12H	9.2	9.4	9.7	9.8	10.4	9.2	9.4	9.7	9.8	10.4
12H	4H	9.3	9.6	9.8	10.0	10.5	9.3	9.6	9.8	10.0	10.5
	6H	9.2	9.4	9.7	9.9	10.4	9.2	9.4	9.7	9.9	10.4
	8H	9.2	9.4	9.7	9.8	10.4	9.2	9.4	9.7	9.8	10.4
Variations with the observer position at spacing:											
S =	1.0H	5.4 / -8.9					5.4 / -8.9				
	1.5H	8.1 / -11.2					8.1 / -11.2				
	2.0H	10.1 / -12.7					10.1 / -12.7				