



Design iGuzzini iGuzzini

Product configuration: Q514
Q514: Frame 15 cells - Flood beam - LED

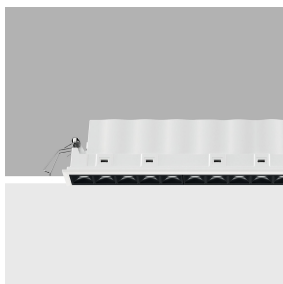

Q514: Frame 15 cells - Flood beam - LED

Linear miniaturised recessed luminaire with 15 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Supplied with DALI power supply unit connected to the luminaire.

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 276.

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Grey / Black (74)* | White / burnished chrome (E7)*

0.75

* Colours on request

wall recessed|ceiling recessed

On the power supply unit with terminal board included.

Complies with EN60598-1 and pertinent regulations




| | | | |
|--|------|---------------------------------------|---------------------------------|
| Im system: | 2739 | Colour temperature [K]: | 4000 |
| W system: | 33.8 | MacAdam Step: | 2 |
| Im source: | 3300 | Life Time LED 1: | > 50,000h - L80 - B10 (Ta 25°C) |
| W source: | 30 | Voltage [Vin]: | 230 |
| Luminous efficiency (Im/W, real value): | 81 | Lamp code: | LED |
| Im in emergency mode: | - | Number of lamps for optical assembly: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | ZVEI Code: | LED |
| Light Output Ratio (L.O.R.) [%]: | 83 | Number of optical assemblies: | 1 |
| Beam angle [°]: | 43° | Control: | DALI-2 |
| CRI (minimum): | 90 | | |

| | | | | | |
|---|---|------------|-----------|------------------------|--|
| | I_{max} =5625 cd CIE nL 0.83 100-100-100-100-83 UGR <10<10 DIN A.61 UTE 0.83A+0.00T F*1=999 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m ² at 65° UGR<10 L<1500 cd/mq @65° | Lux | | | |
| | h | d | Em | E_{max} | |
| | 2 | 1.5 | 1145 | 1396 | |
| | 4 | 3.1 | 286 | 349 | |
| | 6 | 4.6 | 127 | 155 | |
| 8 | 6.1 | 72 | 87 | | |

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 75 | 71 | 68 | 66 | 70 | 68 | 68 | 65 | 78 |
| 1.0 | 78 | 75 | 72 | 70 | 74 | 72 | 71 | 69 | 83 |
| 1.5 | 82 | 80 | 77 | 76 | 79 | 77 | 76 | 74 | 89 |
| 2.0 | 85 | 83 | 81 | 80 | 82 | 80 | 79 | 77 | 93 |
| 2.5 | 86 | 85 | 84 | 83 | 84 | 83 | 82 | 79 | 96 |
| 3.0 | 87 | 86 | 85 | 85 | 85 | 84 | 83 | 81 | 98 |
| 4.0 | 88 | 87 | 87 | 86 | 86 | 86 | 84 | 82 | 99 |
| 5.0 | 89 | 88 | 88 | 88 | 87 | 87 | 85 | 83 | 100 |

Luminance curve limit

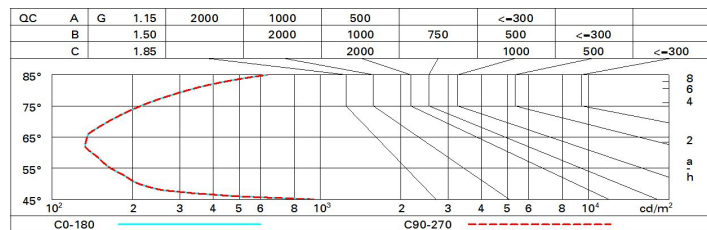

UGR diagram

| Corrected UGR values (at 3300 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|------|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.: ceiling/cav walls work pl. Room dim x y | | viewed crosswise | | | | | viewed endwise | | | | |
| | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 |
| | | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 |
| | | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 |
| | | | | | | | | | | | |
| 2H | 2H | 7.8 | 8.3 | 8.1 | 8.5 | 8.8 | 7.8 | 8.3 | 8.1 | 8.5 | 8.8 |
| | 3H | 7.7 | 8.1 | 8.0 | 8.4 | 8.7 | 7.7 | 8.1 | 8.0 | 8.4 | 8.7 |
| | 4H | 7.6 | 8.1 | 8.0 | 8.3 | 8.6 | 7.6 | 8.0 | 8.0 | 8.3 | 8.6 |
| | 6H | 7.6 | 7.9 | 7.9 | 8.3 | 8.6 | 7.6 | 7.9 | 7.9 | 8.2 | 8.6 |
| | 8H | 7.5 | 7.9 | 7.9 | 8.2 | 8.6 | 7.5 | 7.9 | 7.9 | 8.2 | 8.5 |
| | 12H | 7.5 | 7.9 | 7.9 | 8.2 | 8.5 | 7.5 | 7.8 | 7.9 | 8.2 | 8.5 |
| | | | | | | | | | | | |
| 4H | 2H | 7.6 | 8.0 | 8.0 | 8.3 | 8.6 | 7.6 | 8.1 | 8.0 | 8.3 | 8.6 |
| | 3H | 7.5 | 7.8 | 7.9 | 8.2 | 8.5 | 7.5 | 7.8 | 7.9 | 8.2 | 8.5 |
| | 4H | 7.4 | 7.7 | 7.8 | 8.1 | 8.5 | 7.4 | 7.7 | 7.8 | 8.1 | 8.5 |
| | 6H | 7.3 | 7.6 | 7.7 | 8.0 | 8.4 | 7.3 | 7.6 | 7.7 | 8.0 | 8.4 |
| | 8H | 7.3 | 7.5 | 7.7 | 7.9 | 8.4 | 7.3 | 7.5 | 7.7 | 7.9 | 8.4 |
| | 12H | 7.2 | 7.5 | 7.7 | 7.9 | 8.3 | 7.2 | 7.4 | 7.7 | 7.9 | 8.3 |
| | | | | | | | | | | | |
| 8H | 4H | 7.3 | 7.5 | 7.7 | 7.9 | 8.4 | 7.3 | 7.5 | 7.7 | 7.9 | 8.4 |
| | 6H | 7.2 | 7.4 | 7.6 | 7.8 | 8.3 | 7.2 | 7.4 | 7.7 | 7.8 | 8.3 |
| | 8H | 7.1 | 7.3 | 7.6 | 7.8 | 8.3 | 7.1 | 7.3 | 7.6 | 7.8 | 8.3 |
| | 12H | 7.1 | 7.2 | 7.6 | 7.7 | 8.3 | 7.1 | 7.2 | 7.6 | 7.7 | 8.2 |
| | | | | | | | | | | | |
| 12H | 4H | 7.2 | 7.4 | 7.7 | 7.9 | 8.3 | 7.2 | 7.5 | 7.7 | 7.9 | 8.3 |
| | 6H | 7.1 | 7.3 | 7.6 | 7.8 | 8.3 | 7.1 | 7.3 | 7.6 | 7.8 | 8.3 |
| | 8H | 7.1 | 7.2 | 7.6 | 7.7 | 8.2 | 7.1 | 7.2 | 7.6 | 7.7 | 8.3 |
| | | | | | | | | | | | |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | 1.0H | 7.0 / -14.5 | | | | | 7.0 / -14.5 | | | | |
| | 1.5H | 9.8 / -14.7 | | | | | 9.8 / -14.7 | | | | |
| | 2.0H | 11.8 / -14.8 | | | | | 11.8 / -14.8 | | | | |