

Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: June 2025

Product configuration: EJ76

EJ76: Frame 5 cells - Wideflood beam - LED



Product code

EJ76: Frame 5 cells - Wideflood beam - LED

Technical description

Linear miniaturised recessed luminaire with 5 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Supplied with DALI power supply unit connected to the luminaire. High efficiency value Neutral White LED (lm/W).

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 96.

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Grey / Black (74)* | White / burnished chrome (E7)*

Weight (Kg)

0.35

* Colours on request

Mounting

ceiling surface

Wiring

On the power supply unit with terminal board included.

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	1038	Colour temperature [K]:	4000
W system:	12.4	MacAdam Step:	2
lm source:	1250	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	9.9	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	83.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	58°	Control:	DALI-2
CRI (minimum):	80		


Polar

 $\alpha = 58^\circ$	CIE nL 0.83 100-100-100-100-83 UGR 15.8-15.8 DIN A.61 UTE 0.83A+0.00T F*1=996 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<16 L<1500 cd/mq @ 65°			
	h	d	Em	E _{max}
	1	1.1	1051	1311
	2	2.2	263	328
	3	3.3	117	146
	4	4.4	66	82

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

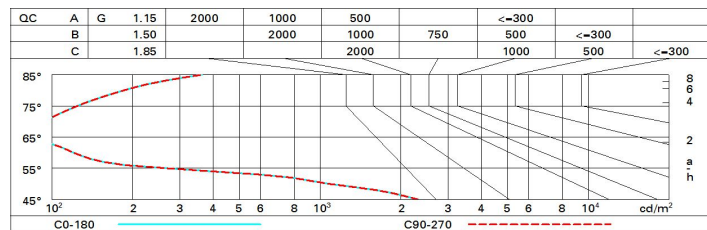

UGR diagram

Corrected UGR values (at 1250 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	16.4	16.8	16.6	17.1	17.3	16.4	16.8	16.6	17.1	17.3
	3H	16.2	16.7	16.5	16.9	17.2	16.2	16.7	16.5	16.9	17.2
	4H	16.2	16.6	16.5	16.8	17.1	16.2	16.6	16.5	16.8	17.1
	6H	16.1	16.5	16.4	16.8	17.1	16.1	16.5	16.4	16.8	17.1
	8H	16.1	16.4	16.4	16.7	17.1	16.1	16.4	16.4	16.7	17.1
	12H	16.0	16.4	16.4	16.7	17.0	16.0	16.4	16.4	16.7	17.0
4H	2H	16.2	16.6	16.5	16.8	17.1	16.2	16.6	16.5	16.8	17.1
	3H	16.0	16.4	16.4	16.7	17.0	16.0	16.4	16.4	16.7	17.0
	4H	15.9	16.2	16.3	16.6	17.0	15.9	16.2	16.3	16.6	17.0
	6H	15.8	16.1	16.3	16.5	16.9	15.8	16.1	16.3	16.5	16.9
	8H	15.8	16.0	16.2	16.4	16.9	15.8	16.0	16.2	16.4	16.9
	12H	15.7	16.0	16.2	16.4	16.8	15.7	16.0	16.2	16.4	16.8
8H	4H	15.8	16.0	16.2	16.4	16.9	15.8	16.0	16.2	16.4	16.9
	6H	15.7	15.9	16.2	16.3	16.8	15.7	15.9	16.2	16.3	16.8
	8H	15.6	15.8	16.1	16.3	16.8	15.6	15.8	16.1	16.3	16.8
	12H	15.6	15.7	16.1	16.2	16.7	15.6	15.7	16.1	16.2	16.7
12H	4H	15.7	16.0	16.2	16.4	16.8	15.7	16.0	16.2	16.4	16.8
	6H	15.6	15.8	16.1	16.3	16.8	15.6	15.8	16.1	16.3	16.8
	8H	15.6	15.7	16.1	16.2	16.7	15.6	15.7	16.1	16.2	16.7
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				