Design Bruno
Gecchelin


iGuzzini

Last information update: May 2024

Product configuration: MS00

MS00: Recessed DALI extractable-control gear







Product code

MS00: Recessed DALI extractable-control gear Attention! Code no longer in production

Technical description

Die-cast aluminium and thermoplastic material, recessed luminaire complete with C.O.B technology LED lamp in a 4000K neutral white colour tone. Luminaire with wide flood optic complete with high level light output and uniform distribution OPTIBEAM reflector. The product permits an internal rotation around the 335° vertical axis and the 65° horizontal plane with continuous friction (only on this rotation). Product complete with a DALI driver separate from the luminaire.

Installation

Recessed in false ceilings, with thicknesses starting from between 1 mm and 20 mm, using special steel torsion springs and hinged brackets.

Colour

White (01) | Grey (15)

Mounting

ceiling recessed

Wiring

product complete with DALI components

Notes

For compliance with the NFC 20-455 standard use an optional filter code MW57 for each optical assembly

Complies with EN60598-1 and pertinent regulations












Technical data Im system: 2368 80 W system: 25.1 Colour temperature [K]: 4000 3000 MacAdam Step: Im source: W source: 22 Life Time LED 1: > 50,000h - L80 - B10 (Ta 25°C) Luminous efficiency (lm/W, 94.3 Lamp code: LED real value): Number of lamps for optical Im in emergency mode: assembly: Total light flux at or above an angle of 90° [Lm]: ZVEI Code: LED Number of optical Light Output Ratio (L.O.R.) 79 assemblies: Control: DALI Beam angle [°]: 54°


Polar

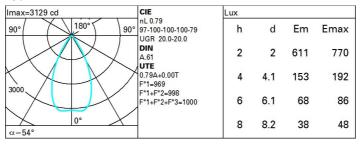

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	64	61	66	63	63	60	76
1.0	74	70	67	66	69	67	67	64	81
1.5	78	75	73	71	74	72	71	69	87
2.0	80	78	77	75	77	76	75	73	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	80	80	78	76	97
4.0	84	83	82	82	81	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

Luminance curve limit

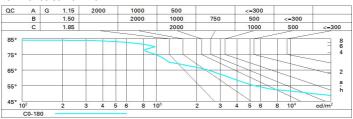

D:flo		in value.	3 (at 300)	o im bar	e lamp lu	eu oni mu	flux)				
nine	ct.:										
ceil/cav walls work pl.		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50 0.20	0.30	0.30	0.50 0.20	0.30 0.20	0.50	0.30	0.30
х у		crosswise					endwise				
2H	2H	20.6	21.2	20.8	21.4	21.6	20.6	21.2	20.8	21.4	21.
	ЗН	20.4	21.0	20.7	21.2	21.5	20.4	21.0	20.7	21.2	21.
	4H	20.3	20.9	20.7	21.2	21.5	20.3	20.9	20.7	21.2	21.
	бН	20.3	20.7	20.6	21.1	21.4	20.3	20.7	20.6	21.1	21.
	HS	20.2	20.7	20.6	21.0	21.4	20.2	20.7	20.6	21.0	21.
	12H	20.2	20.6	20.6	21.0	21.3	20.2	20.6	20.6	21.0	21.
4H	2H	20.3	20.9	20.7	21.2	21.5	20.3	20.9	20.7	21.2	21.
	ЗН	20.2	20.6	20.6	21.0	21.3	20.2	20.6	20.6	21.0	21.
	4H	20.1	20.5	20.5	20.9	21.3	20.1	20.5	20.5	20.9	21.
	бН	20.0	20.4	20.5	20.8	21.2	20.0	20.4	20.5	20.8	21.
	HS	20.0	20.3	20.4	20.7	21.1	20.0	20.3	20.4	20.7	21.
	12H	19.9	20.2	20.4	20.6	21.1	19.9	20.2	20.4	20.6	21.
8Н	4H	20.0	20.3	20.4	20.7	21.1	20.0	20.3	20.4	20.7	21.
	бН	19.9	20.1	20.4	20.6	21.1	19.9	20.1	20.4	20.6	21.
	HS	19.8	20.1	20.3	20.5	21.0	19.8	20.1	20.3	20.5	21.
	12H	19.8	20.0	20.3	20.5	21.0	19.8	20.0	20.3	20.5	21.
12H	4H	19.9	20.2	20.4	20.6	21.1	19.9	20.2	20.4	20.6	21.
	бН	19.8	20.1	20.3	20.5	21.0	19.8	20.1	20.3	20.5	21.
	HS	19.8	20.0	20.3	20.5	21.0	19.8	20.0	20.3	20.5	21.
Varia	tions wi	th the ob	serverp	noitieo	at spacin	g:					
S =	1.0H	5.4 / -14.3					5.4 / -14.3				
	1.5H	8.2 / -16.7					8.2 / -16.7				