

Outdoor luminaire with down light symmetrical optic.

Luminaire characteristic:	Power input system: 123W Lumens system for 3000K, 80CRI: 2552lm to 2725lm Luminaire efficacy for 3000K, 80CRI: Up to 20lm/W
Source:	White LED (LM-80 tested) 3000K : 80CRI, 4000K : 80CRI.
Lumen maintenance:	80% of initial lumens at 50 000 hours (L80 B10) T77°F (25°C)
Optic:	360° down light symmetrical optic.
Material:	Body: Stainless steel cylindrical body, bolts and screws.
Mounting:	Pole on mounting base (anchor flange included).
Electrical:	Universal high efficiency electronic power supply, rated 50 000 hours. 120-277V.
Finish:	Black, gray (RAL9007), rust brown or white (RAL9016) painted finish with a high level of weather and UV resistance. The semi-gloss finish coating is electrostatically applied, durable acrylic enamel baked at high temperatures for superior color retentive finish.
Weight:	451.4 lb (204.75kg).
EPA:	11.6 ft ² (1.08 m ²).
Warranty:	5 year limited warranty.
Ratings:	IP65, IK08.
Certification:	Wet location.




ORDERING INFO



PRODUCT CODE

--	--	--	--


MODEL	LED	VOLTAGE	FINISH
IADR	1 3000K 80 CRI	UNV 120-277V	01 White
	3 4000K 80CRI		02 Black
			15 Gray
			F5 Rust brown




TECHNICAL DATA

CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODELS
3000K	80	123W	Symmetrical	2 552	20	1380	IADR1
4000K	80	123W	Symmetrical	2 725	22	1473	IADR3


3000K, 80CRI



Light distribution at 16ft



4000K, 80CRI

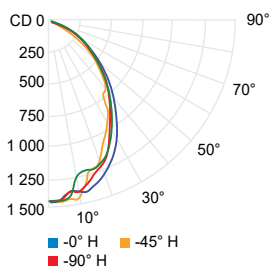

Light distribution at 16ft

