

Last information update: April 2024

Product configuration: MB68

MB68: Round recessed luminaire - D=226 mm H=103 mm - neutral white - electronic ballast - optic with asymmetrical double emission



Product code

MB68: Round recessed luminaire - D=226 mm H=103 mm - neutral white - electronic ballast - optic with asymmetrical double emission **Attention! Code no longer in production**

Technical description

Recessed fixed round luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 3000 lm LED unit in a neutral white tone 4000K and electronic driver separate from the luminaire. Double asymmetrical light distribution.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.88

Mounting

ceiling recessed

Wiring

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations




IP20

IP23




pending




Technical data

lm system:	2819	CRI:	80
W system:	26.5	Colour temperature [K]:	4000
lm source:	3000	MacAdam Step:	3
W source:	23	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	106.4	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	94	Number of optical assemblies:	1

Polar

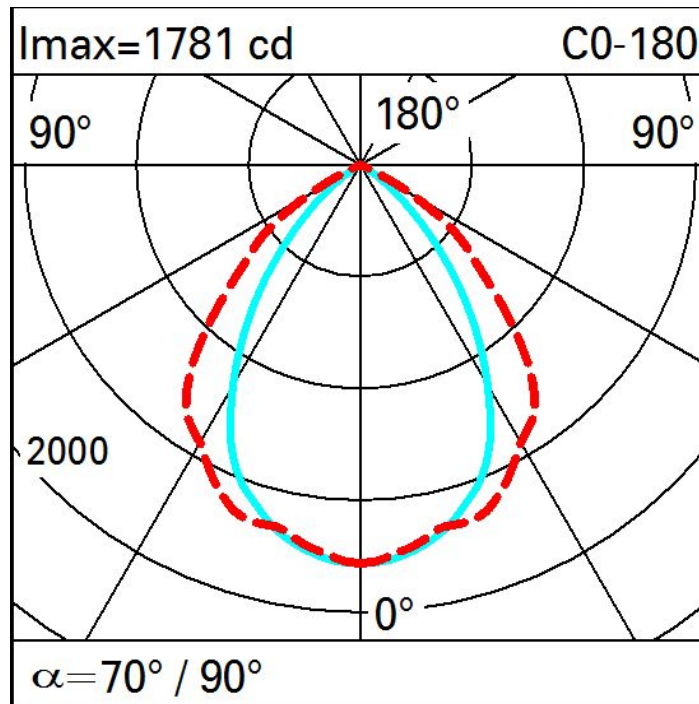

Isolux

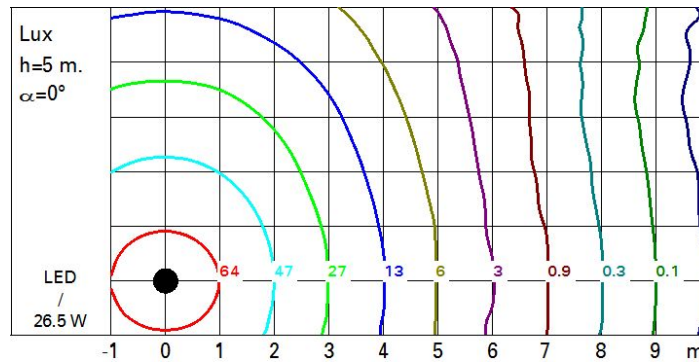

Illuminances

