

Palco Recessed / Surface

Last information update: February 2025

**Product configuration: QX27**  
QX27: Palco single surface Ø37 - flood - remote driver



**Product code**  
QX27: Palco single surface Ø37 - flood - remote driver

**Technical description**  
Miniaturised adjustable spotlight for surface installation. Spotlight body with a die-cast aluminium dissipation system - cast zamak rotation unit - shaped steel fixing plate - thermoplastic surface cover base with stainless steel locking mechanism. The swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic unit guarantees a high level of visual comfort with a thermoplastic high definition lens. Ballast not included, available with separate code.

**Installation**  
Installation surface plate fastening - spotlight unit attached to cover base with a locking mechanism.

<b>Colour</b>	<b>Weight (Kg)</b>
White (01)   Black (04)	0.11

**Mounting**  
wall surface|ceiling surface


**Wiring**  
Output cables for connecting to power supply line.

**Notes**  
Technical and anti-glare accessories available.

Complies with EN60598-1 and pertinent regulations




Technical data			
Im system:	504	CRI (minimum):	90
W system:	8.1	Colour temperature [K]:	4000
Im source:	840	MacAdam Step:	2
W source:	8.1	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	62.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	60	Number of optical assemblies:	1
Beam angle [°]:	45°	LED current [mA]:	650

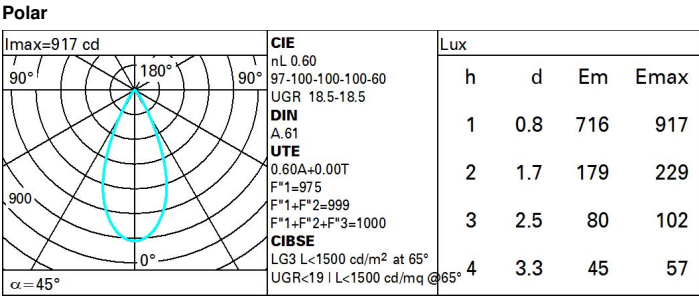

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	51	49	47	50	48	48	46	77
1.0	56	53	51	50	53	51	51	49	81
1.5	59	57	55	54	56	55	54	53	88
2.0	61	59	58	57	59	58	57	55	92
2.5	62	61	60	59	60	59	59	57	95
3.0	63	62	61	61	61	61	60	58	97
4.0	64	63	63	62	62	62	61	59	99
5.0	64	64	63	63	63	62	61	60	100

# Luminance curve limit

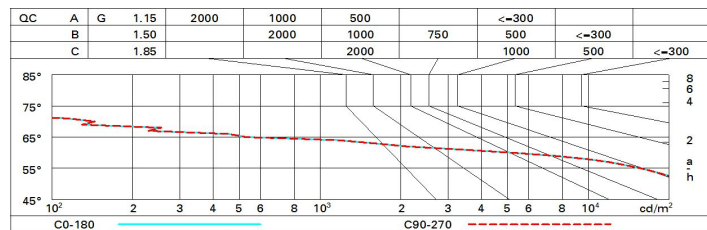

# UGR diagram

Corrected UGR values (at 840 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	19.0	19.7	19.3	19.9	20.1	19.0	19.7	19.3	19.9	20.1
	3H	18.9	19.5	19.2	19.7	20.0	18.9	19.5	19.2	19.7	20.0
	4H	18.8	19.3	19.1	19.6	19.9	18.8	19.4	19.2	19.7	20.0
	6H	18.7	19.2	19.1	19.5	19.9	18.8	19.2	19.1	19.6	19.9
	8H	18.7	19.2	19.1	19.5	19.8	18.7	19.2	19.1	19.5	19.9
	12H	18.7	19.1	19.0	19.5	19.8	18.7	19.1	19.1	19.5	19.8
4H	2H	18.8	19.4	19.2	19.7	20.0	18.8	19.3	19.1	19.6	19.9
	3H	18.7	19.1	19.1	19.5	19.8	18.7	19.1	19.1	19.5	19.8
	4H	18.6	19.0	19.0	19.4	19.7	18.6	19.0	19.0	19.4	19.7
	6H	18.5	18.8	18.9	19.2	19.7	18.5	18.8	18.9	19.2	19.7
	8H	18.5	18.8	18.9	19.2	19.6	18.5	18.8	18.9	19.2	19.6
	12H	18.4	18.7	18.9	19.1	19.6	18.4	18.7	18.9	19.1	19.6
8H	4H	18.5	18.8	18.9	19.2	19.6	18.5	18.8	18.9	19.2	19.6
	6H	18.4	18.6	18.8	19.1	19.5	18.4	18.6	18.8	19.1	19.5
	8H	18.3	18.5	18.8	19.0	19.5	18.3	18.5	18.8	19.0	19.5
	12H	18.3	18.5	18.8	18.9	19.5	18.3	18.5	18.8	18.9	19.5
12H	4H	18.4	18.7	18.9	19.1	19.6	18.4	18.7	18.9	19.1	19.6
	6H	18.3	18.5	18.8	19.0	19.5	18.3	18.5	18.8	19.0	19.5
	8H	18.3	18.5	18.8	18.9	19.5	18.3	18.5	18.8	18.9	19.5
Variations with the observer position at spacing:											
S =		1.0H		5.2 / -8.8				5.2 / -8.8			
		1.5H		8.0 / -22.1				8.0 / -22.1			
		2.0H		10.0 / -34.7				10.0 / -34.7			