

## Deep Frame


Design iGuzzini

iGuzzini

Last information update: October 2023

### Product configuration: P934

P934: Deep Frame - 3 elements - CoB warm LED - wide flood beam - dimmable DALI

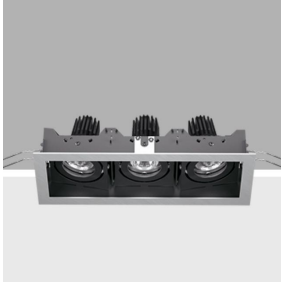

### Product code

P934: Deep Frame - 3 elements - CoB warm LED - wide flood beam - dimmable DALI **Attention! Code no longer in production**

### Technical description

Three element recessed luminaire for an LED lamp. Version with a perimeter frame. Shaped sheet steel structural frame. Die-cast aluminium, twin swivel universal joints located in a position set back from the installation surface to guarantee a high level of visual comfort. Tilts  $\pm 30^\circ$  around both the horizontal and vertical axes. Die-cast aluminium lighting bodies designed to optimise heat dispersal. High efficiency aluminium reflectors - wide flood angle. High color rendering index, warm white LED lamps. Each lamp unit has its own glass cover. Mechanical installation system. DALI dimmable control gear units included.

### Installation

Recessed in 1 to 30mm thick false ceilings - secured with manually adjustable metal brackets. Preparation hole 169 x 327.

### Colour

White (01) | Grey / Black (74)

### Weight (Kg)

4.8

### Mounting

ceiling recessed

### Wiring

Complete with DALI dimmable control gear units connected to the luminaire. Wiring for connecting to mains network on driver terminal board. For the dimensions of the installation compartment see the instructions sheet.

### Notes

Accessories available: refractor for elliptical flow distribution - interchangeable reflector.

Complies with EN60598-1 and pertinent regulations



### Technical data

lm system:	6833	Colour temperature [K]:	3000
W system:	94.4	MacAdam Step:	3
lm source:	3000	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	27	Ballast losses [W]:	4.5
Luminous efficiency (lm/W, real value):	72.4	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	76	Number of optical assemblies:	3
Beam angle [°]:	48°	Control:	DALI
CRI:	90		


### Polar

 $\alpha = 48^\circ$	<b>CIE</b> nL 0.76 99-100-100-100-76 UGR 11.7-11.7 <b>DIN</b> A.61 <b>UTE</b> 0.76A+0.00T F*1=988 F*1+F*2=998 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m <sup>2</sup> at 65° UGR<16   L<1500 cd/mq @65°			
	h	d	Em	Emax
	2	1.8	727	912
	4	3.6	182	228
	6	5.3	81	101
	8	7.1	45	57

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	65	62	60	64	62	61	59	78
1.0	71	68	66	64	67	65	65	62	82
1.5	75	72	71	69	72	70	69	67	88
2.0	77	75	74	73	74	73	72	70	93
2.5	79	77	76	75	76	75	74	72	95
3.0	80	79	78	77	77	77	76	74	97
4.0	81	80	79	79	79	78	77	75	99
5.0	81	81	80	80	79	79	78	76	100

# Luminance curve limit

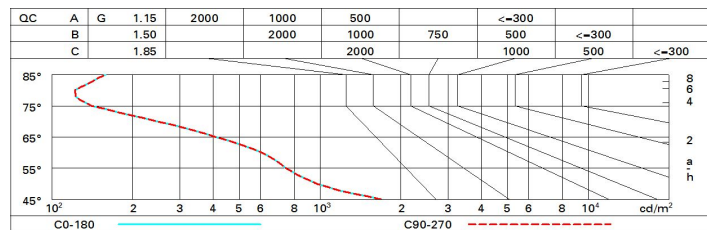

# UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	12.3	12.8	12.5	13.0	13.3	12.3	12.8	12.5	13.0	13.3
	3H	12.1	12.6	12.4	12.9	13.2	12.1	12.6	12.4	12.9	13.2
	4H	12.1	12.5	12.4	12.8	13.1	12.1	12.5	12.4	12.8	13.1
	6H	12.0	12.4	12.3	12.7	13.1	12.0	12.4	12.3	12.7	13.1
	8H	12.0	12.4	12.3	12.7	13.0	11.9	12.4	12.3	12.7	13.0
	12H	11.9	12.3	12.3	12.6	13.0	11.9	12.3	12.3	12.6	13.0
4H	2H	12.1	12.5	12.4	12.8	13.1	12.1	12.5	12.4	12.8	13.1
	3H	11.9	12.3	12.3	12.7	13.0	11.9	12.3	12.3	12.7	13.0
	4H	11.8	12.2	12.2	12.5	12.9	11.8	12.2	12.2	12.5	12.9
	6H	11.7	12.1	12.2	12.4	12.9	11.7	12.1	12.2	12.4	12.9
	8H	11.7	12.0	12.1	12.4	12.8	11.7	12.0	12.1	12.4	12.8
	12H	11.6	11.9	12.1	12.3	12.8	11.6	11.9	12.1	12.3	12.8
8H	4H	11.7	12.0	12.1	12.4	12.8	11.7	12.0	12.1	12.4	12.8
	6H	11.6	11.8	12.1	12.3	12.8	11.6	11.8	12.1	12.3	12.8
	8H	11.6	11.8	12.0	12.2	12.7	11.6	11.8	12.0	12.2	12.7
	12H	11.5	11.7	12.0	12.2	12.7	11.5	11.7	12.0	12.2	12.7
12H	4H	11.6	11.9	12.1	12.3	12.8	11.6	11.9	12.1	12.3	12.8
	6H	11.5	11.7	12.0	12.2	12.7	11.6	11.8	12.0	12.2	12.7
	8H	11.5	11.7	12.0	12.2	12.7	11.5	11.7	12.0	12.2	12.7
Variations with the observer position at spacing:											
S =	1.0H	6.1 / -13.4					6.1 / -13.4				
	1.5H	8.9 / -14.8					8.9 / -14.8				
	2.0H	10.9 / -16.5					10.9 / -16.5				