

## Easy


Design iGuzzini

iGuzzini

Last information update: April 2025

### Product configuration: QF90.39

QF90.39: Ø 163 mm - warm white - DALI - UGR<19 - 24.5W 3010lm - 3000K - White / Aluminium

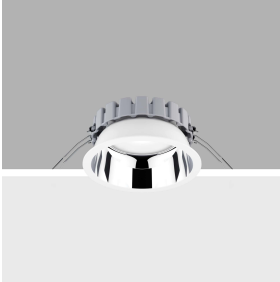

### Product code

QF90.39: Ø 163 mm - warm white - DALI - UGR<19 - 24.5W 3010lm - 3000K - White / Aluminium

### Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3000K). Light beam with UGR<19 L<3000 cd/m<sup>2</sup> ideal for environments with video terminals.

### Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

### Colour

White / Aluminium (39)

### Weight (Kg)

0.68


### Mounting

ceiling surface

### Wiring

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



### Technical data

lm system:	3010	Colour temperature [K]:	3000
W system:	24.5	MacAdam Step:	2
lm source:	3500	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	21	Lamp code:	LED
Luminous efficiency (lm/W, real value):	122.9	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	86	Control:	DALI-2
CRI (minimum):	80		


### Polar

Imax=4229 cd	CIE nL 0.86 95-100-100-100-86 UGR 17.6-17.6 DIN A.61 UTE 0.86A+0.00T F*1=951 F*1.4*F*2=1000 F*1.4*F*2+F*3=1000 CIBSE LG3 L<1500 cd/m <sup>2</sup> at 65° UGR<19   L<1500 cd/mq @65°	Lux			
		h	d	Em	Emax
90°		2	1.7	825	1057
180°		4	3.5	206	264
4000		6	5.2	92	117
0°		8	6.9	52	66
α=47°					

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	76	71	68	66	71	68	67	64	75
1.0	79	76	73	70	75	72	72	69	80
1.5	84	81	79	77	80	78	77	74	87
2.0	87	85	83	81	84	82	81	79	91
2.5	89	87	86	84	86	84	84	81	94
3.0	90	89	88	87	87	86	85	83	96
4.0	91	90	89	89	88	88	87	84	98
5.0	91	91	90	90	89	89	87	85	99

Luminance curve limit

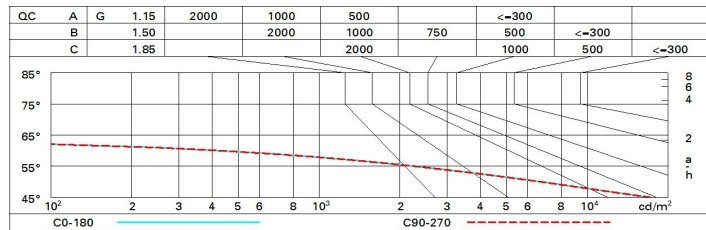

UGR diagram

Corrected UGR values (at 3500 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	18.2	18.9	18.5	19.1	19.4	18.2	18.9	18.5	19.1	19.4
	3H	18.1	18.7	18.4	18.9	19.2	18.1	18.7	18.4	18.9	19.2
	4H	18.0	18.6	18.4	18.8	19.2	18.0	18.6	18.4	18.9	19.2
	6H	17.9	18.4	18.3	18.7	19.1	17.9	18.4	18.3	18.8	19.1
	8H	17.9	18.4	18.3	18.7	19.0	17.9	18.4	18.3	18.7	19.0
	12H	17.9	18.3	18.2	18.7	19.0	17.9	18.3	18.2	18.7	19.0
4H	2H	18.0	18.6	18.4	18.9	19.2	18.0	18.6	18.4	18.8	19.2
	3H	17.9	18.3	18.2	18.7	19.0	17.9	18.3	18.2	18.7	19.0
	4H	17.8	18.2	18.2	18.5	18.9	17.8	18.2	18.2	18.5	18.9
	6H	17.7	18.0	18.1	18.4	18.9	17.7	18.0	18.1	18.4	18.9
	8H	17.6	18.0	18.1	18.4	18.8	17.6	18.0	18.1	18.4	18.8
	12H	17.6	17.9	18.1	18.3	18.8	17.6	17.9	18.1	18.3	18.8
8H	4H	17.6	18.0	18.1	18.4	18.8	17.6	18.0	18.1	18.4	18.8
	6H	17.6	17.8	18.0	18.3	18.7	17.6	17.8	18.0	18.3	18.7
	8H	17.5	17.7	18.0	18.2	18.7	17.5	17.7	18.0	18.2	18.7
	12H	17.4	17.6	17.9	18.1	18.6	17.4	17.6	17.9	18.1	18.6
12H	4H	17.6	17.9	18.1	18.3	18.8	17.6	17.9	18.1	18.3	18.8
	6H	17.5	17.7	18.0	18.2	18.7	17.5	17.7	18.0	18.2	18.7
	8H	17.4	17.6	17.9	18.1	18.6	17.4	17.6	17.9	18.1	18.6
Variations with the observer position at spacing:											
S =	1.0H	4.2 / -15.1					4.2 / -15.1				
	1.5H	7.0 / -37.3					7.0 / -37.3				
	2.0H	9.0 / -38.6					9.0 / -38.6				