

## Mini Light Air


Design Bruno  
Gecchelin

iGuzzini

Last information update: February 2023

### Product configuration: M105+L147

M105: Individual pendant Dark-VDU  $L \leq 1000 \text{ cd/m}^2$   $\alpha > 65^\circ$  up/down with electronic control gear T1635/49/80W



### Product code

M105: Individual pendant Dark-VDU  $L \leq 1000 \text{ cd/m}^2$   $\alpha > 65^\circ$  up/down with electronic control gear T1635/49/80W **Attention! Code no longer in production**

### Technical description

Suspended lighting system designed for fluorescent light sources with up/down dark light luminous emission. The product permits down-light-only emission by means of a top cover made of plastic material. Controlled-luminance optic  $L \leq 1000 \text{ cd/m}^2$  for  $\alpha > 65^\circ$  suitable for use in environments with VDUs according to standard EN 12464-1. The lamellar optic with bi-parabolic profile is made of anodised specular superpure aluminium. The structure of the fitting is made of galvanised painted sheet-steel; the lamp-holding supports are made of galvanised painted sheet-steel; the end caps are made of polycarbonate. The top protection screen (to be ordered separately) is made of transparent polycarbonate subjected to anti-UV treatment. The power-supply cable is transparent and the cables are subjected to antioxidant treatment. The suspension system is included in the fitting.

### Installation

Suspended installation. The suspension system, supplied with the product, is provided with sheet-steel supporting plates, polycarbonate covering bases and steel suspension cables with millimetric adjustment system (applied to the modules).

### Colour

White (01) | Grey (15)

### Mounting

ceiling pendant

### Wiring

The fitting is equipped with 35/49/80W T16 Multiwatt electronic ballast.


Complies with EN60598-1 and pertinent regulations



### Technical data

lm system:	5701,7	Colour temperature [K]:	4000
W system:	91	Ballast losses [W]:	11
lm source:	6150	Voltage [Vin]:	230
W source:	80	Lamp code:	L147
Luminous efficiency (lm/W, real value):	62,7	Socket:	G5
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of $90^\circ$ [Lm]:	3653,1	ZVEI Code:	T 16
Light Output Ratio (L.O.R.) [%]:	93	Number of optical assemblies:	1
CRI:	86		


### Polar

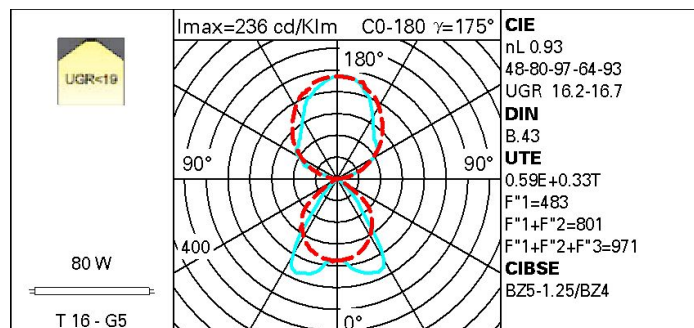

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	45	39	34	40	35	32	24	40
1.0	59	51	45	40	46	41	37	28	47
1.5	68	61	56	52	55	51	46	36	60
2.0	73	68	63	59	61	57	52	41	69
2.5	76	72	68	64	65	61	55	45	75
3.0	79	75	71	68	67	64	58	47	79
4.0	81	78	75	73	70	68	61	50	84
5.0	83	80	78	76	72	70	63	52	87

# Luminance curve limit

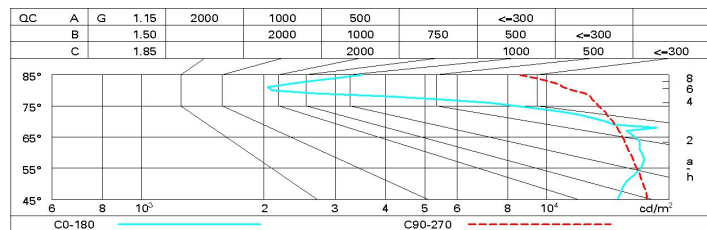

# UGR diagram

Photometric curve code: 31880000.147											
Uncorrected UGR values (at 1000 lm bare lamp luminous flux)											
Reflect.:											
ceiling	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
walls	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
work pl.	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim											
x											
y											
2H	2H	13.8	14.6	14.6	15.4	16.3	13.8	14.6	14.6	15.3	16.3
	3H	15.3	16.0	16.1	16.8	17.8	14.3	14.9	15.0	15.7	16.7
	4H	15.5	16.2	16.3	17.0	18.0	14.4	15.1	15.2	15.9	16.9
	6H	15.5	16.0	16.3	16.9	17.9	14.5	15.0	15.3	15.9	16.9
	8H	15.4	16.0	16.3	16.8	17.9	14.4	15.0	15.3	15.8	16.9
	12H	15.4	15.9	16.2	16.8	17.8	14.4	14.9	15.2	15.7	16.8
4H	2H	14.4	15.1	15.2	15.9	16.9	15.8	16.4	16.6	17.2	18.2
	3H	16.0	16.6	16.9	17.4	18.4	16.4	16.9	17.2	17.8	18.8
	4H	16.3	16.8	17.1	17.6	18.7	16.6	17.1	17.5	17.9	19.0
	6H	16.2	16.7	17.1	17.5	18.6	16.7	17.1	17.6	18.0	19.1
	8H	16.2	16.6	17.1	17.5	18.6	16.7	17.1	17.6	17.9	19.0
	12H	16.1	16.5	17.0	17.4	18.5	16.6	17.0	17.5	17.9	19.0
8H	4H	16.4	16.8	17.3	17.6	18.7	17.2	17.6	18.1	18.5	19.6
	6H	16.4	16.7	17.3	17.6	18.7	17.4	17.7	18.3	18.6	19.7
	8H	16.3	16.6	17.3	17.5	18.7	17.4	17.7	18.3	18.6	19.7
	12H	16.3	16.5	17.2	17.5	18.6	17.4	17.6	18.3	18.6	19.7
12H	4H	16.3	16.7	17.2	17.6	18.7	17.3	17.6	18.2	18.5	19.6
	6H	16.4	16.6	17.3	17.5	18.7	17.5	17.7	18.4	18.7	19.8
	8H	16.4	16.6	17.3	17.5	18.7	17.5	17.8	18.5	18.7	19.9
Variations with the observer position at spacing:											
S =	1.0H		0.1	/	-0.1			0.1	/	-0.1	
	1.5H		0.4	/	-0.6			0.2	/	-0.3	
	2.0H		0.6	/	-0.8			0.5	/	-0.6	