

Cup


Design Roberto Pamio

iGuzzini

Last information update: June 2023

Product configuration: MQ96

MQ96: pendant - LED lamp - Warm White



Product code

MQ96: pendant - LED lamp - Warm White **Attention! Code no longer in production**

Technical description

Pendant luminaire for diffused lighting with mains voltage LED lamp. Thick pressed glass diffuser. Ceiling rose and technical elements made of aluminium and steel. Diffuser click-on coupling has a safety system to prevent accidental release of the glass. Steel suspension cable with millimetric adjustment system.

Installation

Ceiling rose element to be fixed to ceiling with screws and screw anchors.

Colour

White (01) | Grey (15)

Mounting

ceiling pendant

Wiring

Three-pin terminal board on ceiling rose: quick-coupling connections


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	663	Colour temperature [K]:	2700
W system:	9.7	Life Time LED 1:	50,000h - L70 (Ta 25°C)
Im source:	850	Ballast losses [W]:	0
W source:	9.7	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	68.4	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	87	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	78	Number of optical assemblies:	1
CRI (minimum):	80		

Polar

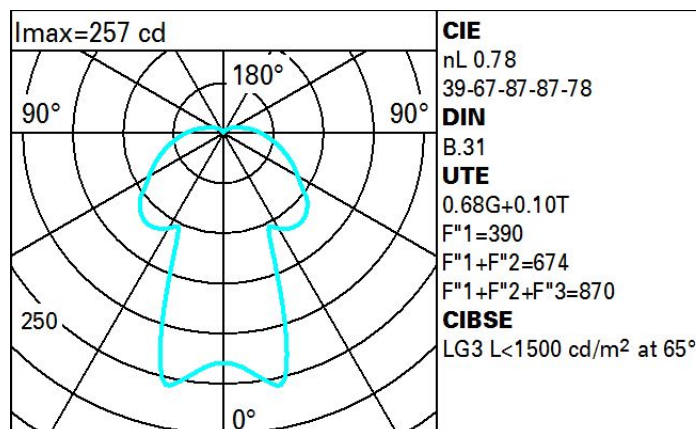

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	46	37	31	27	35	30	28	22	33
1.0	51	43	36	32	40	35	33	27	39
1.5	59	51	46	41	48	44	41	35	51
2.0	63	57	52	48	54	50	47	40	59
2.5	66	61	56	53	57	54	51	44	65
3.0	68	64	60	56	60	57	54	47	69
4.0	71	67	64	61	63	61	57	51	75
5.0	73	69	66	64	66	63	60	53	79
