

# Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: March 2025

## Product configuration: EJ59

EJ59: Ceiling-mounted linear HC - 10 cells - Flood beam

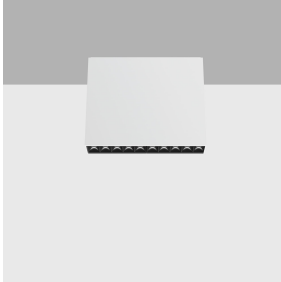

### Product code

EJ59: Ceiling-mounted linear HC - 10 cells - Flood beam

### Technical description

Ceiling-mounted luminaire with 10 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Extruded aluminium main body and technical dissipation unit - shaped steel fixing plate. Integrated DALI dimmable electronic ballast. High efficiency value Neutral White LED (lm/W).

### Installation

Ceiling-mounted with surface fixing plate (screws and screw anchors not included) - external locking system.

### Colour

White (01) | Black / Black (43) | Black / White (47)

### Weight (Kg)

0.69


### Mounting

ceiling surface

### Wiring

Cables supplied with quick-coupling terminals for connecting to power supply line.

Complies with EN60598-1 and pertinent regulations




### Technical data

|  |      |  |  |
|--|------|--|--|
| lm system:   | 2117 | Life Time LED 1:   | > 50,000h - L80 - B10 (Ta 25°C)  |
| W system:  | 22.7 | Voltage [Vin]:   | 230  |
| lm source:   | 2550 | Lamp code:   | LED  |
| W source:  | 20   | Number of lamps for optical assembly:                                    | 1  |
| Luminous efficiency (lm/W, real value):            | 93.2 | ZVEI Code:   | LED  |
| lm in emergency mode:                              | -    | Number of optical assemblies:  | 1  |
| Total light flux at or above an angle of 90° [Lm]: | 0    | Power factor:  | See installation instructions  |
| Light Output Ratio (L.O.R.) [%]:                   | 83   | Inrush current:  | 5 A / 50 µs  |
| Beam angle [°]:                                    | 43°  | Maximum number of luminaires of this type per miniature circuit breaker: | B10A: 31 luminaires<br>B16A: 50 luminaires<br>C10A: 52 luminaires<br>C16A: 85 luminaires |
| CRI (minimum):                                     | 80   | Minimum dimming %:   | 1  |
| Colour temperature [K]:                            | 4000 | Oversvoltage protection:   | 4kV Common mode & 2kV Differential mode  |
| MacAdam Step:                                      | 2    | Control:   | DALI-2   |

### Polar

|                     | Lux |     |     |      |
|---------------------|-----|-----|-----|------|
|                     | h   | d   | Em  | Emax |
| 90°                 | 2   | 1.5 | 885 | 1079 |
| 4000                | 4   | 3.1 | 221 | 270  |
| 0°                  | 6   | 4.6 | 98  | 120  |
| $\alpha = 42^\circ$ | 8   | 6.1 | 55  | 67   |

### Isolux

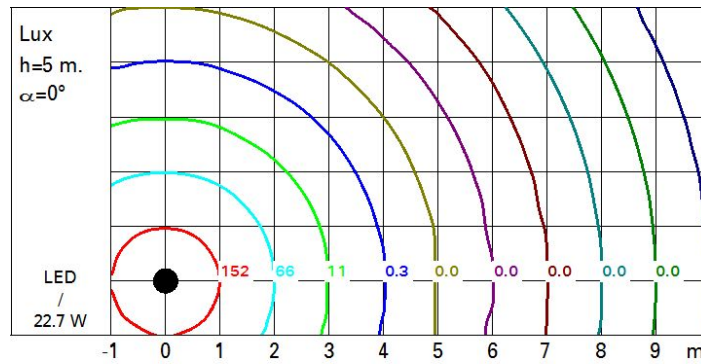

### UGR diagram

| Corrected UGR values (at 2550 lm bare lamp luminous flux) |      |                  |      |      |      |      |                |      |      |      |      |
|---|------|------------------|------|------|------|------|----------------|------|------|------|------|
| Reflect.:   |      | 0.70             | 0.70 | 0.50 | 0.50 | 0.30 | 0.70           | 0.70 | 0.50 | 0.50 | 0.30 |
| ceiling/cav   |      |                  |      |      |      |      |                |      |      |      |      |
| walls   |      |                  |      |      |      |      |                |      |      |      |      |
| work pl.  |      |                  |      |      |      |      |                |      |      |      |      |
| Room dim  |      | viewed crosswise |      |      |      |      | viewed endwise |      |      |      |      |
| x   | y    |                  |      |      |      |      |                |      |      |      |      |
| 2H  | 2H   | 0.7              | 7.2  | 7.0  | 7.4  | 7.6  | 0.7            | 7.2  | 7.0  | 7.4  | 7.6  |
|   | 3H   | 0.6              | 7.0  | 6.9  | 7.3  | 7.5  | 0.6            | 7.0  | 6.9  | 7.3  | 7.5  |
|   | 4H   | 0.5              | 6.9  | 6.8  | 7.2  | 7.5  | 0.5            | 6.9  | 6.8  | 7.2  | 7.5  |
|   | 6H   | 0.4              | 6.8  | 6.8  | 7.1  | 7.4  | 0.4            | 6.8  | 6.8  | 7.1  | 7.4  |
|   | 8H   | 0.4              | 6.8  | 6.8  | 7.1  | 7.4  | 0.4            | 6.8  | 6.8  | 7.1  | 7.4  |
|   | 12H  | 0.4              | 6.7  | 6.7  | 7.1  | 7.4  | 0.4            | 6.7  | 6.7  | 7.0  | 7.4  |
| 4H  | 2H   | 0.5              | 6.9  | 6.8  | 7.2  | 7.5  | 0.5            | 6.9  | 6.8  | 7.2  | 7.5  |
|   | 3H   | 0.4              | 6.7  | 6.7  | 7.0  | 7.4  | 0.4            | 6.7  | 6.7  | 7.0  | 7.4  |
|   | 4H   | 0.3              | 6.6  | 6.7  | 6.9  | 7.3  | 0.3            | 6.6  | 6.7  | 6.9  | 7.3  |
|   | 6H   | 0.2              | 6.5  | 6.6  | 6.9  | 7.3  | 0.2            | 6.5  | 6.6  | 6.8  | 7.3  |
|   | 8H   | 0.1              | 6.4  | 6.6  | 6.8  | 7.2  | 0.1            | 6.4  | 6.6  | 6.8  | 7.2  |
|   | 12H  | 0.1              | 6.3  | 6.6  | 6.8  | 7.2  | 0.1            | 6.3  | 6.5  | 6.7  | 7.2  |
| 8H  | 4H   | 0.1              | 6.4  | 6.6  | 6.8  | 7.2  | 0.1            | 6.4  | 6.6  | 6.8  | 7.2  |
|   | 6H   | 0.0              | 6.3  | 6.5  | 6.7  | 7.2  | 0.1            | 6.3  | 6.5  | 6.7  | 7.2  |
|   | 8H   | 0.0              | 6.2  | 6.5  | 6.6  | 7.1  | 0.0            | 6.2  | 6.5  | 6.6  | 7.1  |
|   | 12H  | 0.0              | 6.1  | 6.5  | 6.6  | 7.1  | 0.0            | 6.1  | 6.5  | 6.6  | 7.1  |
| 12H   | 4H   | 0.1              | 6.3  | 6.5  | 6.7  | 7.2  | 0.1            | 6.3  | 6.6  | 6.8  | 7.2  |
|   | 6H   | 0.0              | 6.2  | 6.5  | 6.6  | 7.1  | 0.0            | 6.2  | 6.5  | 6.7  | 7.1  |
|   | 8H   | 0.0              | 6.1  | 6.5  | 6.6  | 7.1  | 0.0            | 6.1  | 6.5  | 6.6  | 7.1  |
| Variations with the observer position at spacing:         |      |                  |      |      |      |      |                |      |      |      |      |
| S =   | 1.0H | 7.0 / -14.5      |      |      |      |      | 7.0 / -14.5    |      |      |      |      |
|   | 1.5H | 9.8 / -14.7      |      |      |      |      | 9.8 / -14.7    |      |      |      |      |
|   | 2.0H | 11.8 / -14.8     |      |      |      |      | 11.8 / -14.8   |      |      |      |      |