

Laser Blade XS

Design iGuzzini

iGuzzini

Last information update: June 2025

Product configuration: EJ57

EJ57: Ceiling-mounted LB XS Linear HC - 15 cells - Flood beam - remote driver



Product code

EJ57: Ceiling-mounted LB XS Linear HC - 15 cells - Flood beam - remote driver

Technical description

Ceiling-mounted luminaire with 15 optic elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Extruded aluminium main body and technical dissipation unit - shaped steel fixing plate. Ballast not included, available with separate code. High efficiency value Neutral White LED (lm/W).

Installation

Ceiling-mounted with surface fixing plate (screws and screw anchors not included) - external locking system.

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Black/gold (44)* | White / burnished chrome (E7)* | Black/burnished chrome (F1)*

Weight (Kg)

0.43

* Colours on request

Mounting

ceiling surface

Wiring

Cables supplied with quick-coupling terminals for connecting to power supply line.

Complies with EN60598-1 and pertinent regulations




IP20




Technical data

lm system:	3030	CRI (minimum):	80
W system:	30	Colour temperature [K]:	4000
lm source:	3650	MacAdam Step:	2
W source:	30	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, 101 real value):		Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	43°	LED current [mA]:	700

Polar

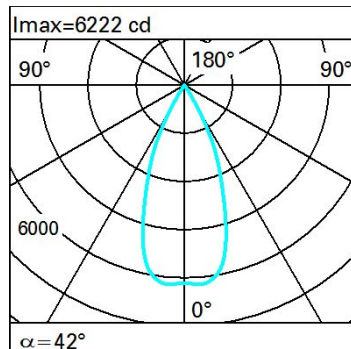Imax=6222 cd		Lux			
90°	180°	h	d	Em	E _{max}
		2	1.5	1266	1544
		4	3.1	317	386
		6	4.6	141	172
		8	6.1	79	97
$\alpha = 42^\circ$					

Isolux

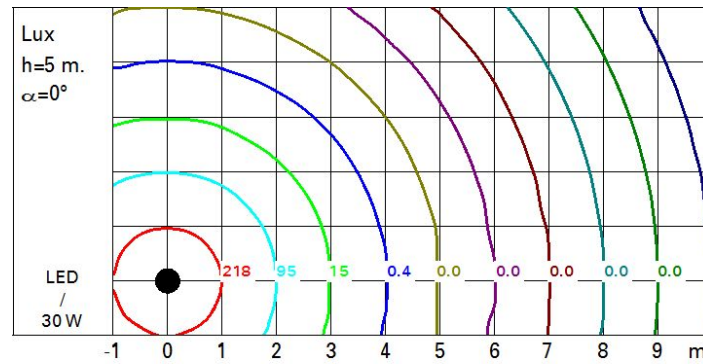

UGR diagram

Corrected UGR values (at 3650 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	0.6	7.1	0.9	7.3	7.5	0.6	7.1	0.9	7.3	7.5
	3H	0.5	0.9	0.8	7.2	7.4	0.5	0.9	0.8	7.2	7.4
	4H	0.4	0.8	0.7	7.1	7.4	0.4	0.8	0.7	7.1	7.4
	6H	0.3	0.7	0.7	7.0	7.3	0.3	0.7	0.7	7.0	7.3
	8H	0.3	0.6	0.6	7.0	7.3	0.3	0.6	0.6	7.0	7.3
	12H	0.2	0.6	0.6	0.9	7.3	0.2	0.6	0.6	0.9	7.3
4H	2H	0.4	0.8	0.7	7.1	7.4	0.4	0.8	0.7	7.1	7.4
	3H	0.2	0.6	0.6	0.9	7.3	0.2	0.6	0.6	0.9	7.3
	4H	0.1	0.5	0.5	0.8	7.2	0.1	0.5	0.5	0.8	7.2
	6H	0.1	0.3	0.5	0.7	7.1	0.1	0.3	0.5	0.7	7.1
	8H	0.0	0.3	0.5	0.7	7.1	0.0	0.3	0.4	0.7	7.1
	12H	0.0	0.2	0.4	0.6	7.1	0.0	0.2	0.4	0.6	7.1
8H	4H	0.0	0.3	0.4	0.7	7.1	0.0	0.3	0.5	0.7	7.1
	6H	5.9	0.1	0.4	0.6	7.0	5.9	0.1	0.4	0.6	7.1
	8H	5.9	0.1	0.4	0.5	7.0	5.9	0.1	0.4	0.5	7.0
	12H	5.8	0.0	0.3	0.5	7.0	5.8	0.0	0.3	0.5	7.0
12H	4H	0.0	0.2	0.4	0.6	7.1	0.0	0.2	0.4	0.6	7.1
	6H	5.9	0.0	0.4	0.5	7.0	5.9	0.1	0.4	0.5	7.0
	8H	5.8	0.0	0.3	0.5	7.0	5.8	0.0	0.3	0.5	7.0
Variations with the observer position at spacing:											
S =		1.0H	7.0 / -14.5				7.0 / -14.5				
		1.5H	9.8 / -14.7				9.8 / -14.7				
		2.0H	11.8 / -14.8				11.8 / -14.8				