



Last information update: May 2024

Product configuration: N967+N982.01

N967: Initial profile L 1208

N982.01: LED module - L 1196 - dark-light emission - warm white - integrated DALI dimmable control gear - 42W 5600lm - 3000K - White



Product code

N967: Initial profile L 1208 **Attention! Code no longer in production**

Technical description

Minimal (frameless) version extruded aluminium initial profile for down emission; complete with superpure aluminium lamellar optic screen with an anodised mirror finish. Controlled luminance $L \leq 1500 \text{ cd/mq2}$ - $\alpha > 65^\circ$.

Installation

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with end caps and the required LED module.

Colour

Aluminium (12)

Weight (Kg)

2.87

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

Set up to house the LED modules required by the system.

Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



Product code

N982.01: LED module - L 1196 - dark-light emission - warm white - integrated DALI dimmable control gear - 42W 5600lm - 3000K - White **Attention! Code no longer in production**

Technical description

LED module set up for housing in iN60 Dark Light down emission system initial or intermediate profiles. Extruded aluminium heat sink linear element. Combined with the lamellar optic screen housed in the system profiles, the luminaire generates an emission with controlled luminance $L \leq 1500 \text{ cd/m2}$ - $\alpha > 65^\circ$, for use in environments with video monitors in compliance with EN 12464-1. Supplied with integrated dimmable DALI control gear. Warm white LED.

Installation

Module insertion on profiles with a mechanical easy-push system (steel snap-on spring).

Colour

White (01)

Weight (Kg)

1.47

Wiring

Quick coupling input/output terminal block connection to simplify connections between the luminaires. LED module complete with integrated DALI control gear.

Complies with EN60598-1 and pertinent regulations



IP20




Technical data

lm system:	3751
W system:	49.3
lm source:	5600
W source:	42
Luminous efficiency (lm/W, real value):	76.1
lm in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	0
Light Output Ratio (L.O.R.) [%]:	67

CRI:	80
Colour temperature [K]:	3000
MacAdam Step:	3
Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Lamp code:	LED
Number of lamps for optical assembly:	1
ZVEI Code:	LED
Number of optical assemblies:	1


Polar

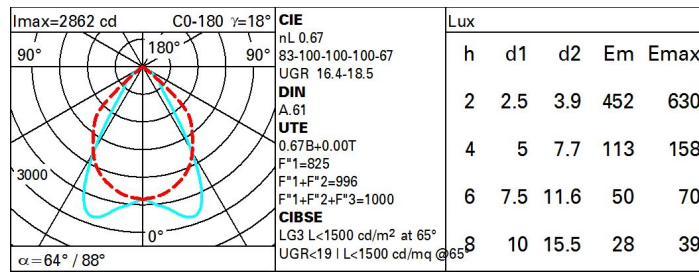

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	55	51	47	45	50	47	47	44	65
1.0	59	55	52	50	54	51	51	48	72
1.5	63	60	58	56	60	58	57	54	81
2.0	66	64	62	61	63	61	61	58	87
2.5	68	66	65	63	65	64	63	61	90
3.0	69	67	66	65	66	65	64	62	93
4.0	70	69	68	67	67	67	66	64	95
5.0	70	69	69	68	68	67	66	64	96

Luminance curve limit

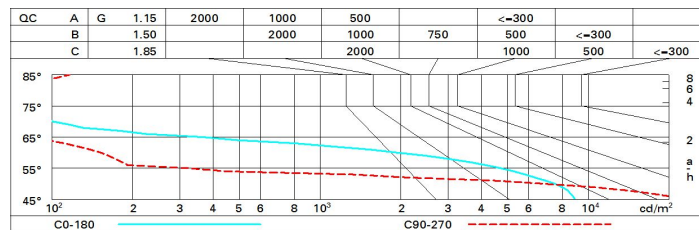

UGR diagram

Corrected UGR values (at 5000 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	16.9	17.6	17.2	17.8	18.1	19.0	19.7	19.3	19.9	20.2	
	3H	16.8	17.4	17.1	17.7	18.0	18.9	19.5	19.2	19.8	20.1	
	4H	16.7	17.3	17.1	17.6	17.9	18.8	19.4	19.2	19.7	20.0	
	6H	16.6	17.2	17.0	17.5	17.8	18.8	19.3	19.1	19.6	19.9	
	8H	16.6	17.1	17.0	17.4	17.8	18.7	19.2	19.1	19.6	19.9	
	12H	16.6	17.0	16.9	17.4	17.7	18.7	19.2	19.1	19.5	19.9	
4H	2H	16.7	17.3	17.1	17.6	17.9	18.8	19.4	19.1	19.7	20.0	
	3H	16.6	17.1	17.0	17.4	17.8	18.7	19.2	19.1	19.5	19.9	
	4H	16.5	16.9	16.9	17.3	17.7	18.6	19.0	19.0	19.4	19.8	
	6H	16.4	16.8	16.8	17.2	17.6	18.5	18.9	18.9	19.3	19.7	
	8H	16.4	16.7	16.8	17.1	17.6	18.5	18.8	18.9	19.2	19.7	
	12H	16.3	16.6	16.8	17.1	17.5	18.4	18.7	18.9	19.2	19.6	
8H	4H	16.4	16.7	16.8	17.1	17.6	18.5	18.8	18.9	19.2	19.7	
	6H	16.3	16.6	16.8	17.0	17.5	18.4	18.7	18.8	19.1	19.6	
	8H	16.2	16.5	16.7	16.9	17.4	18.3	18.6	18.8	19.0	19.5	
	12H	16.2	16.4	16.7	16.9	17.4	18.3	18.5	18.8	19.0	19.5	
12H	4H	16.3	16.6	16.8	17.1	17.5	18.4	18.7	18.9	19.2	19.6	
	6H	16.2	16.5	16.7	16.9	17.4	18.3	18.6	18.8	19.0	19.5	
	8H	16.2	16.4	16.7	16.9	17.4	18.3	18.5	18.8	19.0	19.5	
Variations with the observer position at spacing:												
S =		1.0H	2.7 / -3.8				2.7 / -22.3					
		1.5H	3.5 / -12.3				4.7 / -26.5					
		2.0H	5.4 / -22.4				6.6 / -27.1					