

Platea Pro

Design Jean-Michel
Wilmotte

iGuzzini

Last information update: April 2024

Product configuration: P834

P834: Platea Pro



Product code

P834: Platea Pro

Technical description

SuperSpot optic outdoor luminaire, designed to use WNC (White 2700K, 4000K, 6000K) LED lamps and DMX512-RDM control. Made up of an optical assembly with a base and an aluminium alloy frame. The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. With a 5 mm thick colourless transparent tempered sodium-calcium glass cover. The product can be tilted by +5°/-90° around the vertical plane with a 10° step graduated gauge and fitted with mechanical blocks that guarantee stable aiming of the beam of light. Horizontal aiming is performed using the slots in the base, which allow an $\pm 30^\circ$ adjustment. High visual comfort. Polymer optic lenses offering high yield and even light distribution. Complete with multi-LED power plate with individual white 2700K, 4000K and 6000K LEDs (WNC). Extractable control gear connected with quick-coupling connectors. 220-240V ac 50/60Hz DALI electronic ballast. Replaceable control gear. All the screws used are made of A2 stainless steel.

Installation

The luminaire can be installed at ground level or on walls using the standard base.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

8.6

Mounting

wall arm|wall surface|ground anchored

Wiring

Luminaire ready for pass-through wiring. Product perfect watertightness at the power cable entry point is guaranteed by 2 nickel-plated brass M24x1.5 cable clamps, suitable for cables with a max external 14mm \varnothing (1.5mm² cross section). Push in terminal board.

Notes

Available accessories include: a refractor for elliptical light flow distribution, diffusing glass, visor, directional flaps, protective grille .

Complies with EN60598-1 and pertinent regulations




Technical data

Im system:	4212	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
W system:	42.8	Voltage [Vin]:	230
Im source:	5400	Lamp code:	LED
W source:	35	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	98.4	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 35°C.
Light Output Ratio (L.O.R.) [%]:	78	Power factor:	See installation instructions
Beam angle [°]:	12°	Inrush current:	40 A / - μ s
Colour temperature [K]:	Tunable white 3000 - 5700	Control:	DMX-RDM

Polar

Imax=52044 cd		Lux			
90°	180°	90°	h	d	Em Emax
			15	3.2	189 231
			30	6.3	47 58
			45	9.5	21 26
			60	12.6	12 14
$\alpha = 12^\circ$					

Isolux

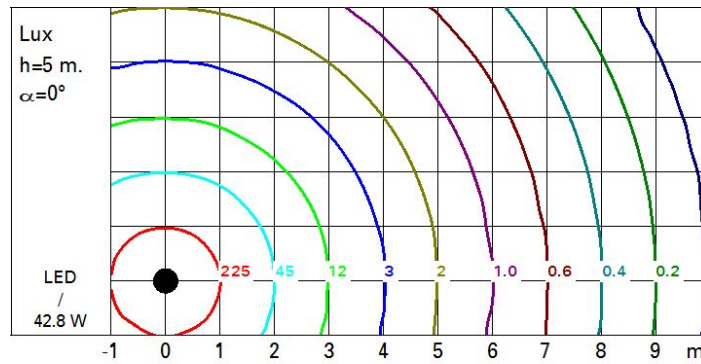

UGR diagram

Corrected UGR values (at 5400 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	9.9	11.8	10.3	12.1	12.5	9.9	11.8	10.3	12.1	12.5
	3H	10.4	11.7	10.8	12.0	12.3	10.2	11.5	10.6	11.8	12.1
	4H	10.5	11.4	10.8	11.8	12.1	10.3	11.2	10.6	11.6	11.9
	6H	10.5	11.2	10.8	11.5	11.8	10.3	11.0	10.6	11.3	11.7
	8H	10.4	11.2	10.8	11.5	11.9	10.2	11.0	10.6	11.4	11.7
	12H	10.3	11.2	10.7	11.6	11.9	10.1	11.0	10.5	11.4	11.8
4H	2H	10.3	11.2	10.6	11.6	11.9	10.5	11.4	10.8	11.8	12.1
	3H	10.8	11.7	11.2	12.0	12.4	10.7	11.7	11.1	12.0	12.4
	4H	10.7	11.9	11.1	12.3	12.7	10.7	11.9	11.1	12.3	12.7
	6H	10.4	12.1	10.9	12.6	13.0	10.4	12.1	10.9	12.6	13.1
	8H	10.3	12.1	10.8	12.6	13.1	10.3	12.2	10.8	12.6	13.1
	12H	10.2	12.0	10.7	12.5	13.0	10.3	12.1	10.8	12.6	13.1
8H	4H	10.3	12.2	10.8	12.6	13.1	10.3	12.1	10.8	12.6	13.1
	6H	10.3	11.9	10.8	12.4	12.9	10.3	11.9	10.8	12.4	12.9
	8H	10.3	11.6	10.9	12.1	12.6	10.3	11.6	10.9	12.1	12.6
	12H	10.5	11.2	11.0	11.7	12.2	10.5	11.2	11.0	11.7	12.2
12H	4H	10.3	12.1	10.8	12.6	13.1	10.2	12.0	10.7	12.5	13.0
	6H	10.3	11.6	10.9	12.1	12.6	10.3	11.6	10.9	12.1	12.6
	8H	10.5	11.2	11.0	11.7	12.2	10.5	11.2	11.0	11.7	12.2
Variations with the observer position at spacing:											
S =		1.0H	1.5	/ -0.8			1.5	/ -0.8			
		1.5H	2.9	/ -1.8			2.9	/ -1.8			
		2.0H	4.3	/ -3.2			4.3	/ -3.2			