

Deep Laser


Design iGuzzini

iGuzzini

Last information update: June 2023

Product configuration: MA09

MA09: medium body, Frame installation 6 LED warm white



Product code

MA09: medium body, Frame installation 6 LED warm white **Attention! Code no longer in production**

Technical description

Fixed square recessed luminaire designed to use a 6X1,5W LED lamp in warm white (3100°K) with medium optic. Recessed item with rim consisting of a single die-cast aluminium body. The upper part is a heat sink which helps to carry away the heat given off by the lamp. LED optics with a single lens made of thermoplastic material. Lamp set back 40 mm for greater visual comfort

Installation

Recessed using springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 30 mm

Colour

White (01) | Grey (15)

Mounting

wall recessed|ceiling recessed

Wiring

product complete with electronic components

Complies with EN60598-1 and pertinent regulations



IP23



Technical data

lm system:	600	CRI (minimum):	80
W system:	10	Colour temperature [K]:	3000
lm source:	1000	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	8.7	Ballast losses [W]:	1.3
Luminous efficiency (lm/W, real value):	60	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	60	Number of optical assemblies:	1
Beam angle [°]:	26° / 24°		


Polar

Imax=2322 cd		C0-180		CIE		Lux	
90°	180°	90°	0°	nL 0.60		h	d1 d2 Em Emax
				95-99-100-100-60		2	0.9 0.9 457 580
				UGR 11.9-11.6		4	1.8 1.7 114 145
				DIN A.61		6	2.8 2.6 51 64
				UTE 0.60A+0.00T		8	3.7 3.4 29 36
				F*1=946			
				F*1+F*2=990			
				F*1+F*2+F*3=998			
				CIBSE LG3 L<3000 cd/m² at 65°			
				UGR<16 L<3000 cd/mq @65°			

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	53	50	47	46	49	47	47	45	74
1.0	55	53	50	49	52	50	50	48	79
1.5	59	56	55	53	56	54	54	52	86
2.0	61	59	58	57	58	57	56	55	91
2.5	62	61	60	59	60	59	58	56	94
3.0	63	62	61	60	61	60	59	58	96
4.0	63	63	62	62	62	61	60	59	98
5.0	64	63	63	63	62	62	61	59	99

Luminance curve limit

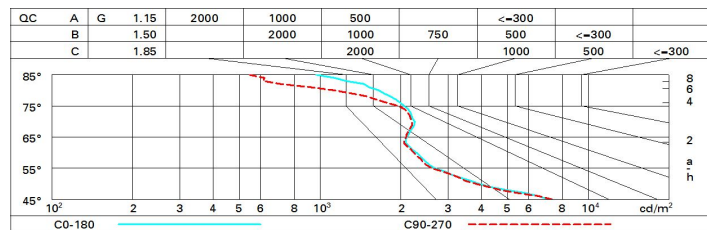

UGR diagram

Corrected UGR values (at 1000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	11.7	13.5	12.0	13.8	14.1	11.6	13.4	11.9	13.7	14.1
	3H	11.9	13.3	12.3	13.6	14.0	11.5	13.0	11.9	13.3	13.6
	4H	12.0	13.3	12.4	13.6	13.9	11.5	12.7	11.9	13.1	13.4
	6H	12.1	13.2	12.5	13.5	13.9	11.4	12.5	11.8	12.8	13.2
	8H	12.1	13.2	12.5	13.5	13.9	11.4	12.5	11.8	12.8	13.2
	12H	12.1	13.1	12.5	13.5	13.9	11.4	12.4	11.8	12.8	13.1
4H	2H	11.6	12.8	12.0	13.1	13.5	11.9	13.1	12.3	13.5	13.8
	3H	11.9	12.9	12.3	13.3	13.6	12.0	13.0	12.4	13.4	13.7
	4H	12.0	13.0	12.5	13.4	13.8	11.9	12.9	12.3	13.3	13.7
	6H	12.0	13.5	12.4	13.9	14.4	11.7	13.2	12.1	13.6	14.1
	8H	11.9	13.6	12.4	14.1	14.5	11.6	13.2	12.0	13.7	14.2
	12H	11.9	13.6	12.4	14.1	14.6	11.5	13.2	12.0	13.7	14.2
8H	4H	11.7	13.4	12.2	13.8	14.3	11.7	13.3	12.2	13.8	14.3
	6H	11.8	13.4	12.3	13.9	14.4	11.6	13.2	12.1	13.7	14.2
	8H	11.9	13.3	12.4	13.8	14.4	11.6	13.0	12.1	13.5	14.1
	12H	12.1	13.0	12.6	13.5	14.1	11.7	12.7	12.3	13.2	13.8
12H	4H	11.6	13.3	12.1	13.8	14.3	11.6	13.3	12.1	13.8	14.3
	6H	11.8	13.2	12.3	13.7	14.3	11.6	13.0	12.1	13.5	14.1
	8H	12.0	13.0	12.5	13.5	14.0	11.7	12.7	12.3	13.2	13.8
Variations with the observer position at spacing:											
S =	1.0H	2.0 / -2.6					2.2 / -2.9				
	1.5H	4.1 / -3.4					4.3 / -3.8				
	2.0H	5.9 / -3.5					6.1 / -4.0				