

View Opti Linear

Design iGuzzini /
Arup

iGuzzini

Last information update: May 2024

Product configuration: N996

N996: medium body - warm white - wide flood optic



Product code

N996: medium body - warm white - wide flood optic **Attention! Code no longer in production**

Technical description

Adjustable spotlight with adapter for installation on electrified track for a linear PCB LED lamp with a Warm White (3000K) tone. Product complete with super pure anodized aluminium reflector to guarantee wide flood light distribution. Electronic ballast integrated in the body. Die-cast aluminium optical assembly. Rotates 360° about the vertical axis and tilts 90° relative to the horizontal plane. Passive heat dissipation. Option of installing a range of outdoor accessories including an anti-glare and an asymmetric screen.

Installation

On an electrified track or base

Colour

Black (04) | Black / White (47)

Weight (Kg)

1.35


Mounting

three circuit track|ceiling surface

Wiring

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	2520	CRI (minimum):	90
W system:	38.6	Colour temperature [K]:	3000
lm source:	2800	MacAdam Step:	2
W source:	33	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	65.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	90	Number of optical assemblies:	1
Beam angle [°]:	80° / 106°		


Polar

		Lux				
Imax=1236 cd 90° 180° 90° 1000 0° α=80° / 106°						
C5-185 γ=20° CIE nL 0.90 64-92-99-100-90 UGR 25,8-31.8 DIN A.51 UTE 0.90C+0.00T F*1=642 F*1+F*2=917 F*1+F*2+F*3=991		h	d1	d2	Em	Emax
		1	1.7	2.7	766	1140
		2	3.4	5.3	191	285
		3	5	8	85	127
		4	6.7	10.6	48	71

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	58	53	49	57	52	52	47	52
1.0	72	65	60	56	63	59	58	53	59
1.5	80	75	70	67	73	69	68	64	71
2.0	85	80	77	74	79	76	75	71	78
2.5	87	84	81	78	82	80	79	75	83
3.0	89	86	84	82	85	82	81	78	86
4.0	91	89	87	85	87	86	84	81	90
5.0	92	91	89	87	89	87	86	82	92

Luminance curve limit

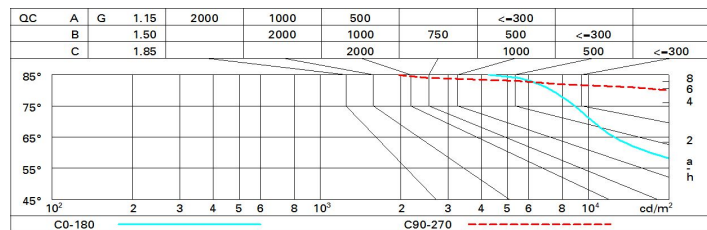

UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	25.3	26.2	25.6	26.4	26.7	30.6	31.4	30.9	31.7	31.9
	3H	25.2	26.0	25.5	26.3	26.6	30.6	31.4	30.9	31.6	31.9
	4H	25.2	25.9	25.5	26.2	26.5	30.5	31.3	30.9	31.6	31.9
	6H	25.1	25.8	25.5	26.1	26.4	30.4	31.1	30.8	31.4	31.8
	8H	25.1	25.7	25.5	26.1	26.4	30.4	31.1	30.8	31.4	31.7
	12H	25.1	25.7	25.4	26.0	26.4	30.4	31.0	30.8	31.3	31.7
4H	2H	26.0	26.7	26.3	27.0	27.3	31.7	32.4	32.0	32.7	33.0
	3H	25.9	26.6	26.3	26.9	27.3	31.9	32.5	32.3	32.8	33.2
	4H	25.9	26.4	26.3	26.8	27.2	31.9	32.4	32.3	32.8	33.2
	6H	25.9	26.3	26.3	26.7	27.2	31.8	32.3	32.2	32.7	33.1
	8H	25.8	26.3	26.3	26.7	27.1	31.8	32.2	32.2	32.6	33.1
	12H	25.8	26.2	26.2	26.6	27.1	31.7	32.1	32.2	32.6	33.0
8H	4H	26.1	26.5	26.5	26.9	27.4	32.0	32.4	32.4	32.8	33.2
	6H	26.0	26.4	26.5	26.8	27.3	31.9	32.3	32.4	32.8	33.2
	8H	26.0	26.3	26.5	26.8	27.3	31.9	32.2	32.4	32.7	33.2
	12H	26.0	26.2	26.5	26.7	27.2	31.9	32.1	32.4	32.6	33.2
12H	4H	26.1	26.5	26.5	26.9	27.4	31.9	32.3	32.4	32.7	33.2
	6H	26.1	26.4	26.5	26.8	27.3	31.9	32.2	32.4	32.7	33.2
	8H	26.0	26.3	26.5	26.8	27.3	31.9	32.2	32.4	32.6	33.2
Variations with the observer position at spacing:											
S =		1.0H					1.7 / -3.2				
		1.5H					2.7 / -5.4				
		2.0H					3.9 / -6.7				
							0.4 / -0.4				
							0.6 / -1.2				
							1.5 / -1.8				