


Last information update: October 2023

**Product configuration: BA99**

BA99: Wall- mounted with electronic transformer white

**Product code**BA99: Wall- mounted with electronic transformer white **Attention! Code no longer in production****Technical description**

Wall- or ceiling-mounted luminaire designed to use white LED light sources with blade-of-light optic. The product is made up of a support base and a screen. The base is made of die-cast aluminium EN1706AC 46100LF and is subjected to a phosphochromatisation process with double primer and 120°C passivation. The liquid acrylic paint is baked at 150°C and ensures high resistance to the external environment and UV rays. The screen is made of ribbed polymethyl-methacrylate. The fitting has a cable clamp PG11 made of stainless-steel. All screws are made of stainless steel (A2). The product comes complete with the lamp.

**Installation**

Wall and ceiling installation by means of stainless-steel hinging plate.

**Colour**

Grey (15)

**Mounting**

wall surface/ceiling surface

**Wiring**

Built-in electronic ballast.

**Notes**

Complete with lamp. On request available with LED cool white (6700K), red, green and amber.

Complies with EN60598-1 and pertinent regulations



650°C

IK04

IP66

EAC



S




pending

**Technical data**

Im system:	127	Colour temperature [K]:	4200
W system:	3.8	MacAdam Step:	4
Im source:	270	Life Time LED 1:	50,000h - L70 - B20 (Ta 25°C)
W source:	3.5	Ballast losses [W]:	0.3
Luminous efficiency (Im/W, real value):	33.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	47	Number of optical assemblies:	1
CRI (minimum):	75	Intervallo temperatura ambiente:	from -20°C to +35°C.

Polar

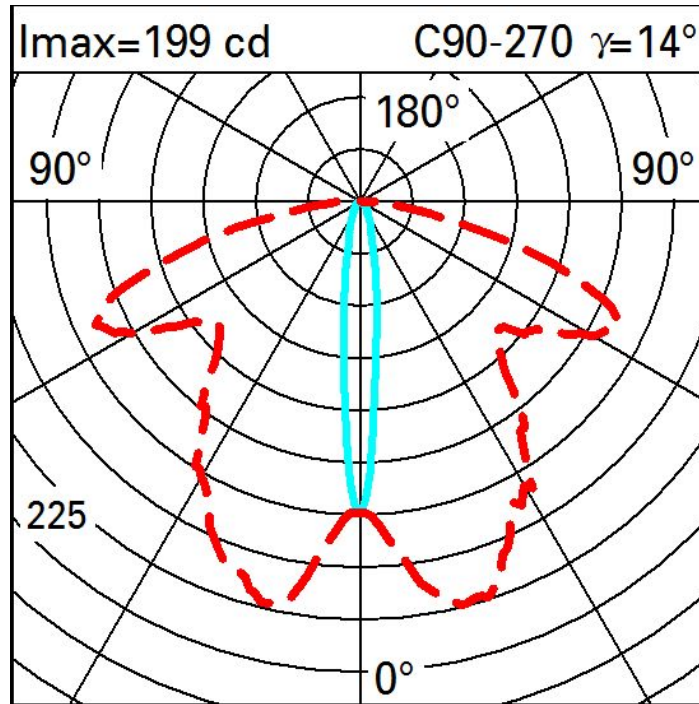

Isolux

