



Features

cULus IP67 IK10


- Ground-recessed luminaire for drive-over areas designed for LED light source
- Grazing light with one-sided or three sided emission.
- Polished AISI 304-18-8 stainless steel body and screws
- Die-cast black-painted aluminum protection screen
- Watertight molded silicone gasket for protection against dust, dirt, and water penetration.
- Tempered clear safety glass with over 1100 pounds load resistance.
- Outer casing made of cast aluminum ring and PVC housing.

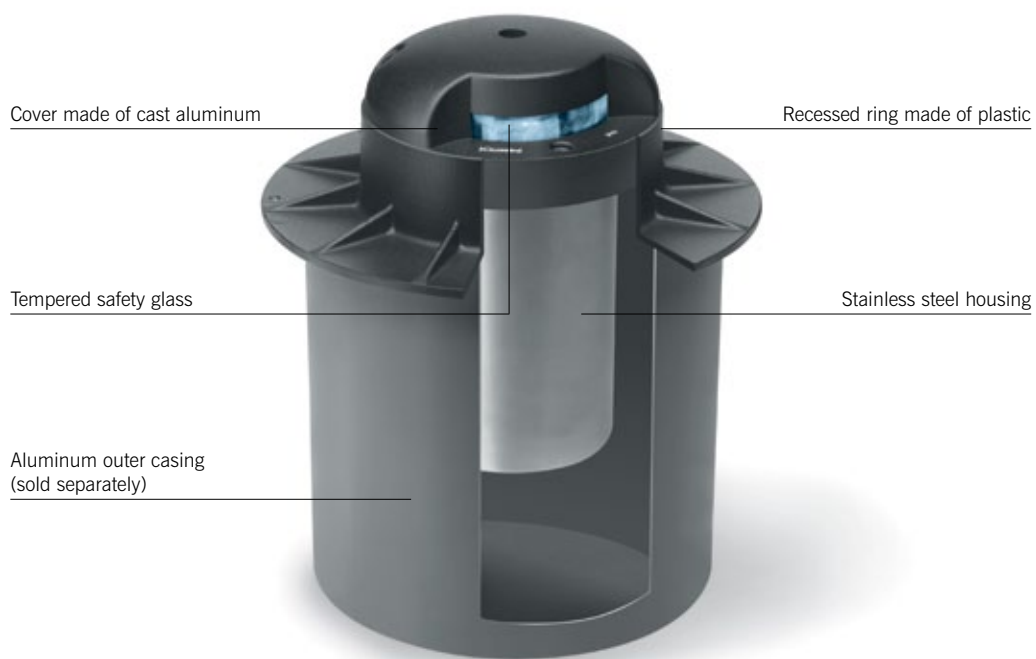


Distribution of light







Lighting from one side





Lighting from three sides




| source | W | code | | code |
|---|--|---------------|---|---------------|
|  | One-side lighting | |  | I.5935 |
| | Warm white | | | |
| | 3 W | 3100K | | |
| | Neutral white, red, green or amber LED available on request | | | |
|  | 20 W | I.BF90 | | |



B892-B893-BD77-I. BF90

| | | | |
|---|--|---------------|----------------|
|  | Three side lighting | | |
| | Warm white | | |
| | 3 W | 3100K | I. BD78 |
| | Neutral white, red, green or amber LED available on request | | |
|  | 20 W | I.BF91 | |



B897-B898-BD78-I. BF91

Finishes

