


Last information update: April 2025

**Product configuration: QG05.39**

QG05.39: Ø 225 mm - neutral white - DALI - UGR<19 - 36.7W 4410lm - 4000K - White / Aluminium



**Product code**

QG05.39: Ø 225 mm - neutral white - DALI - UGR<19 - 36.7W 4410lm - 4000K - White / Aluminium

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in neutral white colour tone (4000K). Light beam with UGR<19 L<3000 cd/m<sup>2</sup> ideal for environments with video terminals.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

1.03


**Mounting**

ceiling surface

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	4410	Colour temperature [K]:	4000
W system:	36.7	MacAdam Step:	2
lm source:	5250	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	32	Lamp code:	LED
Luminous efficiency (lm/W, real value):	120.2	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	84	Control:	DALI-2
CRI (minimum):	80		


**Polar**

<p>Imax=4007 cd α = 65°</p>	<b>CIE</b> nL 0.84 93-100-100-100-84 UGR 17.6-17.6	<b>Lux</b>			
	<b>DIN</b> A.61	<b>h</b>	<b>d</b>	<b>Em</b>	<b>Emax</b>
	<b>UTE</b> 0.84A+0.00T F*1=933 F*1+F*2=999 F*1+F*2+F*3=1000	2	2.5	798	991
	<b>CIBSE</b> LG3 L<1500 cd/m <sup>2</sup> at 65° UGR<19   L<1500 cd/mq @65°	4	5.1	200	248
		6	7.6	89	110
	8	10.2	50	62	

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	69	66	63	68	65	65	62	73
1.0	77	73	70	68	72	70	69	66	79
1.5	82	79	76	74	78	76	75	72	86
2.0	85	82	81	79	81	80	79	76	91
2.5	86	85	83	82	83	82	81	79	94
3.0	87	86	85	84	85	84	83	81	96
4.0	89	88	87	86	86	86	84	82	98
5.0	89	88	88	87	87	86	85	83	99

Luminance curve limit

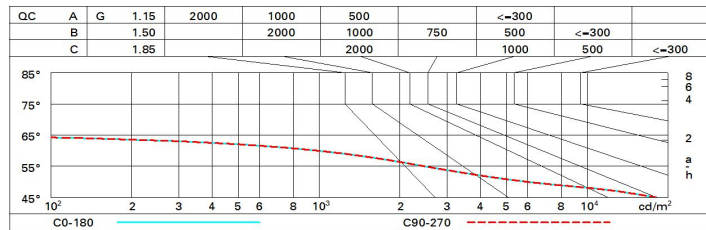

UGR diagram

Corrected UGR values (at 5250 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	18.1	18.8	18.4	19.0	19.2	18.1	18.8	18.4	19.0	19.2
	3H	18.0	18.6	18.3	18.8	19.1	18.0	18.6	18.3	18.8	19.1
	4H	17.9	18.4	18.3	18.7	19.0	17.9	18.4	18.3	18.7	19.0
	6H	17.8	18.3	18.2	18.6	19.0	17.9	18.3	18.2	18.6	19.0
	8H	17.8	18.3	18.2	18.6	18.9	17.8	18.3	18.2	18.6	18.9
12H	17.8	18.2	18.1	18.5	18.9	17.8	18.2	18.2	18.6	18.9	
4H	2H	17.9	18.4	18.3	18.7	19.0	17.9	18.4	18.3	18.7	19.0
	3H	17.8	18.2	18.2	18.6	18.9	17.8	18.2	18.2	18.6	18.9
	4H	17.7	18.1	18.1	18.4	18.8	17.7	18.1	18.1	18.4	18.8
	6H	17.6	17.9	18.0	18.3	18.8	17.6	17.9	18.0	18.3	18.8
	8H	17.6	17.9	18.0	18.3	18.7	17.6	17.9	18.0	18.3	18.7
12H	17.5	17.8	18.0	18.2	18.7	17.5	17.8	18.0	18.2	18.7	
8H	4H	17.6	17.9	18.0	18.3	18.7	17.6	17.9	18.0	18.3	18.7
	6H	17.5	17.7	17.9	18.2	18.6	17.5	17.7	17.9	18.2	18.6
	8H	17.4	17.6	17.9	18.1	18.6	17.4	17.6	17.9	18.1	18.6
	12H	17.4	17.5	17.9	18.0	18.5	17.4	17.5	17.9	18.0	18.5
12H	4H	17.5	17.8	18.0	18.2	18.7	17.5	17.8	18.0	18.2	18.7
	6H	17.4	17.6	17.9	18.1	18.6	17.4	17.6	17.9	18.1	18.6
	8H	17.4	17.5	17.9	18.0	18.5	17.4	17.5	17.9	18.0	18.5
Variations with the observer position at spacing:											
S =	1.0H	4.1 / -13.2					4.1 / -13.2				
	1.5H	6.8 / -26.0					6.8 / -26.0				
	2.0H	8.8 / -39.4					8.8 / -39.4				