

Last information update: March 2025

Product configuration: R519.F6

R519.F6: Ø 212 mm - warm white - WW - DALI - White/Transparent/Chrome



Product code

R519.F6: Ø 212 mm - warm white - WW - DALI - White/Transparent/Chrome

Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Prismatic thermoplastic reflector complete with flux enhancer and metallised flap to guarantee optimum vertical downlight. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3000K). Wall-washer light emission.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 25 mm.

Colour

White/Transparent/Chrome (F6)

Weight (Kg)

1.1

Mounting


ceiling surface

Wiring

Product complete with DALI components

Notes

TPA version available on request, contact iGuzzini for more info



Ø225



Ø212

Complies with EN60598-1 and pertinent regulations




On the visible part of the product once installed

Technical data

Im system:	2573	Colour temperature [K]:	3000
W system:	25.3	MacAdam Step:	2
Im source:	3100	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	22	Lamp code:	LED
Luminous efficiency (Im/W, real value):	101.7	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	Control:	DALI-2
CRI (minimum):	90		

Polar

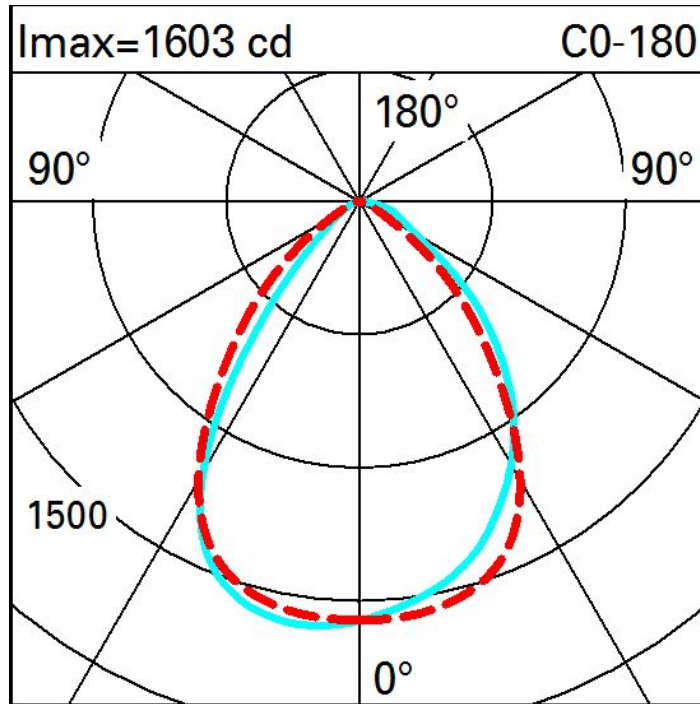

Illuminances

