

Last information update: January 2025

**Product configuration: MU95.43**

MU95.43: 5 - cell Recessed luminaire - LED - Neutral white Wide Flood optic - 9.8W 845.9lm - 4000K - CRI 95 - Black / Black



**Product code**

MU95.43: 5 - cell Recessed luminaire - LED - Neutral white Wide Flood optic - 9.8W 845.9lm - 4000K - CRI 95 - Black / Black

**Technical description**

rectangular miniaturised recessed luminaire with 5 optical elements with LED lamps - fixed optics - wide flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare . Neutral white LED.

**Installation**


recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141

**Colour**


Black / Black (43)

**Mounting**

wall recessed|ceiling recessed



Complies with EN60598-1 and pertinent regulations




On the visible part of the product once installed

**Technical data**

|  |      |                                       |                               |
|--|------|---------------------------------------|-------------------------------|
| lm system:   | 846  | CRI (typical):                        | 97                            |
| W system:  | 9.8  | Colour temperature [K]:               | 4000                          |
| lm source:   | 1020 | MacAdam Step:                         | 3                             |
| W source:  | 9.8  | Life Time LED 1:                      | 50,000h - L90 - B10 (Ta 25°C) |
| Luminous efficiency (lm/W, real value):            | 86.3 | Lamp code:                            | LED                           |
| lm in emergency mode:                              | -    | Number of lamps for optical assembly: | 1                             |
| Total light flux at or above an angle of 90° [Lm]: | 0    | ZVEI Code:                            | LED                           |
| Light Output Ratio (L.O.R.) [%]:                   | 83   | Number of optical assemblies:         | 1                             |
| Beam angle [°]:                                    | 48°  | LED current [mA]:                     | 700                           |
| CRI (minimum):                                     | 95   |                                       |                               |

**Polar**

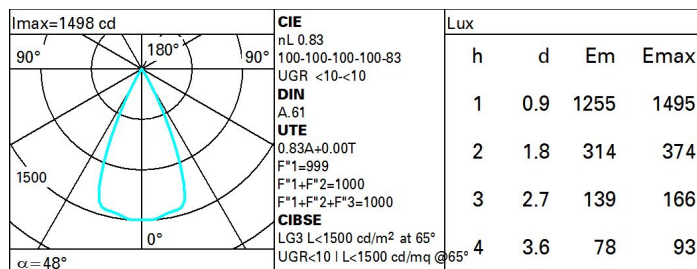

Utilisation factors

| R    | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 75 | 71 | 68 | 66 | 70 | 68 | 68 | 65 | 78  |
| 1.0  | 78 | 75 | 72 | 70 | 74 | 72 | 71 | 69 | 83  |
| 1.5  | 82 | 79 | 77 | 76 | 79 | 77 | 76 | 74 | 89  |
| 2.0  | 85 | 83 | 81 | 80 | 82 | 80 | 79 | 77 | 93  |
| 2.5  | 86 | 85 | 84 | 83 | 84 | 83 | 82 | 79 | 96  |
| 3.0  | 87 | 86 | 85 | 85 | 85 | 84 | 83 | 81 | 98  |
| 4.0  | 88 | 87 | 87 | 86 | 86 | 86 | 84 | 82 | 99  |
| 5.0  | 89 | 88 | 88 | 88 | 87 | 86 | 85 | 83 | 100 |

UGR diagram

| Corrected UGR values (at 1020 lm bare lamp luminous flux) |      |                  |      |      |      |      |                |      |      |      |      |
|---|------|------------------|------|------|------|------|----------------|------|------|------|------|
| Reflect.:   |      | 0.70             | 0.70 | 0.50 | 0.50 | 0.30 | 0.70           | 0.70 | 0.50 | 0.50 | 0.30 |
| ceiling/cav   |      | 0.70             | 0.70 | 0.50 | 0.50 | 0.30 | 0.70           | 0.70 | 0.50 | 0.50 | 0.30 |
| walls   |      | 0.50             | 0.30 | 0.50 | 0.30 | 0.30 | 0.50           | 0.30 | 0.50 | 0.30 | 0.30 |
| work pl.  |      | 0.20             | 0.20 | 0.20 | 0.20 | 0.20 | 0.20           | 0.20 | 0.20 | 0.20 | 0.20 |
| Room dim  |      | viewed crosswise |      |      |      |      | viewed endwise |      |      |      |      |
| x   | y    |                  |      |      |      |      |                |      |      |      |      |
| 2H  | 2H   | 1.8              | 2.3  | 2.1  | 2.5  | 2.7  | 1.8            | 2.3  | 2.1  | 2.5  | 2.7  |
|   | 3H   | 1.7              | 2.1  | 2.0  | 2.4  | 2.6  | 1.7            | 2.1  | 2.0  | 2.4  | 2.6  |
|   | 4H   | 1.6              | 2.0  | 1.9  | 2.3  | 2.6  | 1.6            | 2.0  | 1.9  | 2.3  | 2.6  |
|   | 6H   | 1.5              | 1.9  | 1.9  | 2.2  | 2.5  | 1.5            | 1.9  | 1.9  | 2.2  | 2.5  |
|   | 8H   | 1.5              | 1.9  | 1.9  | 2.2  | 2.5  | 1.5            | 1.9  | 1.8  | 2.2  | 2.5  |
|   | 12H  | 1.5              | 1.8  | 1.8  | 2.1  | 2.5  | 1.5            | 1.8  | 1.8  | 2.1  | 2.5  |
| 4H  | 2H   | 1.6              | 2.0  | 1.9  | 2.3  | 2.6  | 1.6            | 2.0  | 1.9  | 2.3  | 2.6  |
|   | 3H   | 1.5              | 1.8  | 1.8  | 2.1  | 2.5  | 1.5            | 1.8  | 1.8  | 2.1  | 2.5  |
|   | 4H   | 1.4              | 1.7  | 1.8  | 2.0  | 2.4  | 1.4            | 1.7  | 1.8  | 2.0  | 2.4  |
|   | 6H   | 1.3              | 1.5  | 1.7  | 1.9  | 2.4  | 1.3            | 1.5  | 1.7  | 1.9  | 2.4  |
|   | 8H   | 1.2              | 1.5  | 1.7  | 1.9  | 2.3  | 1.2            | 1.5  | 1.7  | 1.9  | 2.3  |
|   | 12H  | 1.2              | 1.4  | 1.6  | 1.8  | 2.3  | 1.2            | 1.4  | 1.6  | 1.8  | 2.3  |
| 8H  | 4H   | 1.2              | 1.5  | 1.7  | 1.9  | 2.3  | 1.2            | 1.5  | 1.7  | 1.9  | 2.3  |
|   | 6H   | 1.1              | 1.3  | 1.6  | 1.8  | 2.3  | 1.1            | 1.3  | 1.6  | 1.8  | 2.3  |
|   | 8H   | 1.1              | 1.3  | 1.6  | 1.7  | 2.2  | 1.1            | 1.3  | 1.6  | 1.7  | 2.2  |
|   | 12H  | 1.0              | 1.2  | 1.5  | 1.7  | 2.2  | 1.0            | 1.2  | 1.5  | 1.7  | 2.2  |
| 12H   | 4H   | 1.2              | 1.4  | 1.6  | 1.8  | 2.3  | 1.2            | 1.4  | 1.6  | 1.8  | 2.3  |
|   | 6H   | 1.1              | 1.3  | 1.6  | 1.7  | 2.2  | 1.1            | 1.3  | 1.6  | 1.7  | 2.2  |
|   | 8H   | 1.0              | 1.2  | 1.5  | 1.7  | 2.2  | 1.0            | 1.2  | 1.5  | 1.7  | 2.2  |
| Variations with the observer position at spacing:         |      |                  |      |      |      |      |                |      |      |      |      |
| S =   | 1.0H | 6.9 / -18.0      |      |      |      |      | 6.9 / -18.0    |      |      |      |      |
|   | 1.5H | 9.7 / -18.3      |      |      |      |      | 9.7 / -18.3    |      |      |      |      |
|   | 2.0H | 11.7 / -18.4     |      |      |      |      | 11.7 / -18.4   |      |      |      |      |